

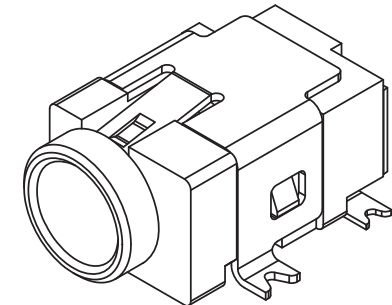
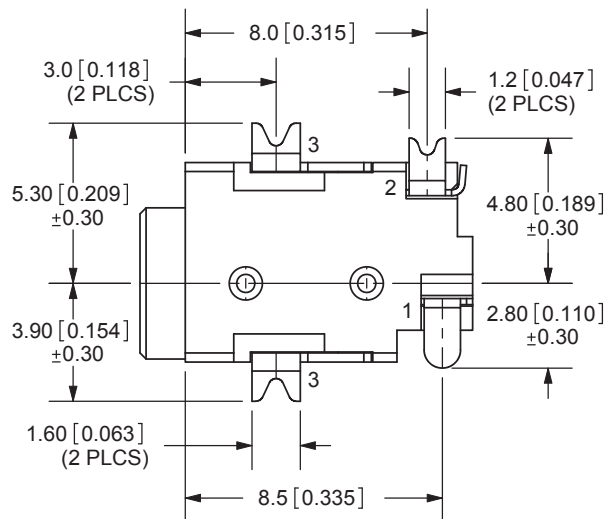
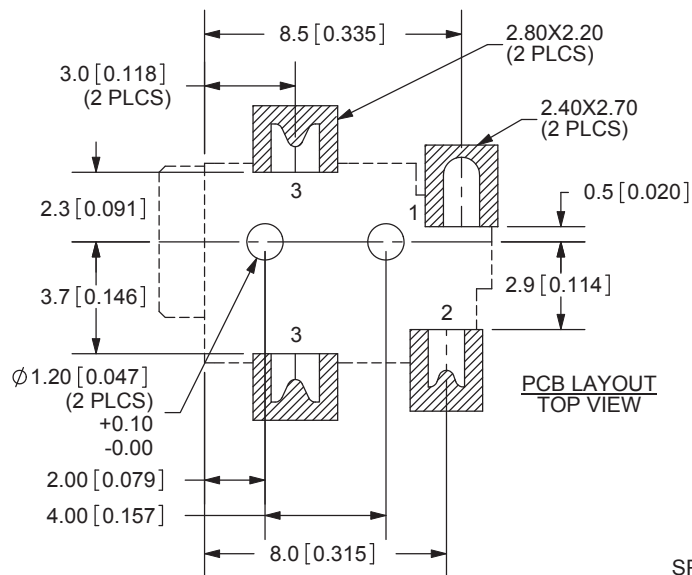


REV.	DESCRIPTION	DATE
A	NEW DRAWING	2/2/2007
B	updated schematic	9/27/2007
C	added TR package option and jack insertion depth	11/7/2012

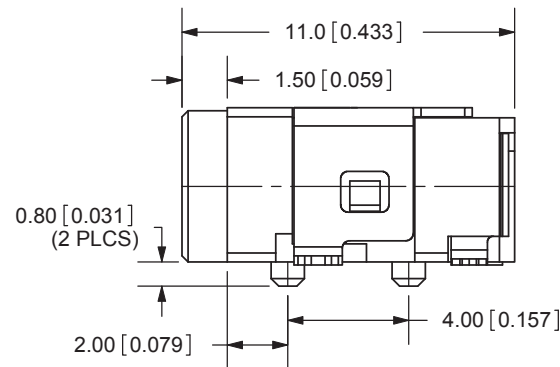

Note:
Add suffix “-TR” to the model number for
tape & reel packaging

TOLERANCE:
X.X $\pm 0.2\text{mm}$
X.XX $\pm 0.1\text{mm}$
X.XXX $\pm 0.05\text{mm}$

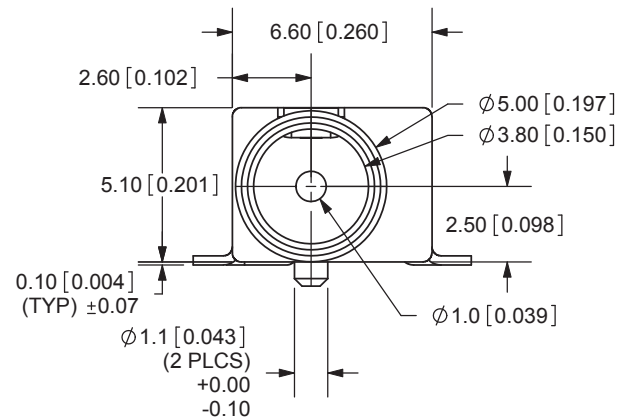

MODEL NO.	PJ-035-SMT
SCHEMATIC	

CENTER PIN DIAMETER 1.0mm Dia.
Jack Insertion Depth: 7.3mm

PC FILE NAME:

PJ-035-SMT

COPYRIGHT 2012 BY CUI INC.

SPECIFICATIONS:

RATING: 16V DC @ 2A
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

		TITLE: 1.0mm SURFACE MOUNT POWER JACK		REV: C
TERMINAL 1	Brass	Silver	PART NO. PJ-035-SMT	UNITS: MM [INCHES]
TERMINAL 2	Copper Alloy	Silver		
TERMINAL 3	Copper Alloy	Silver	DRAWN BY: ZRJ	APPROVED BY:
BODY	PA6T			