



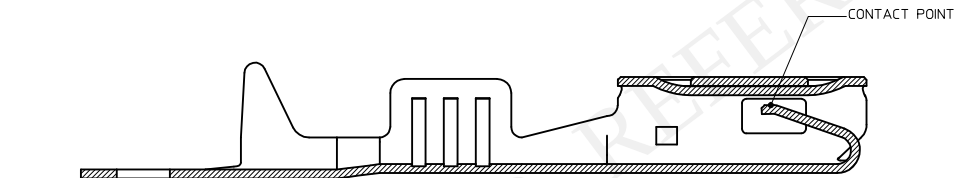
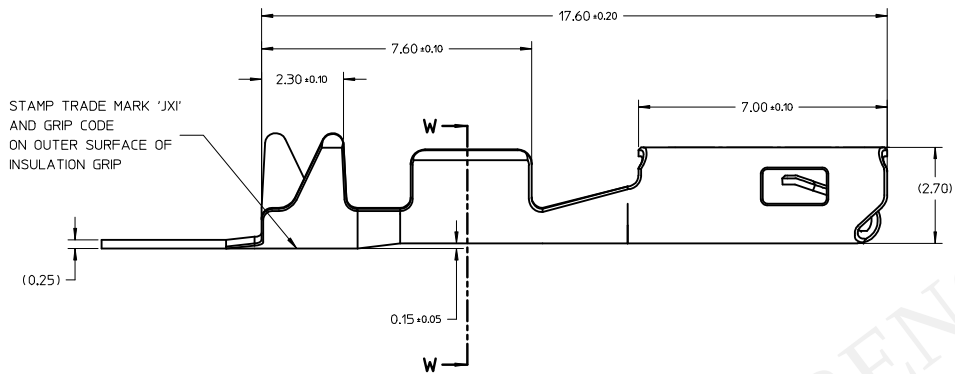


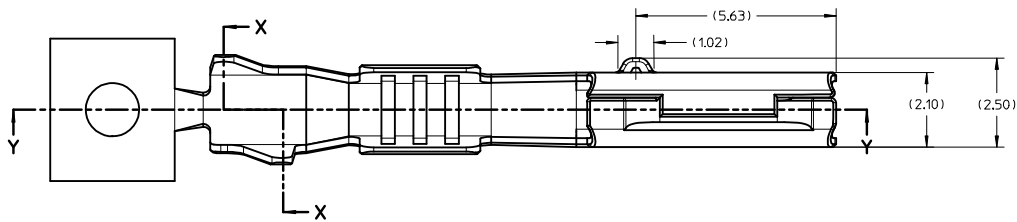

SECTION Y-Y

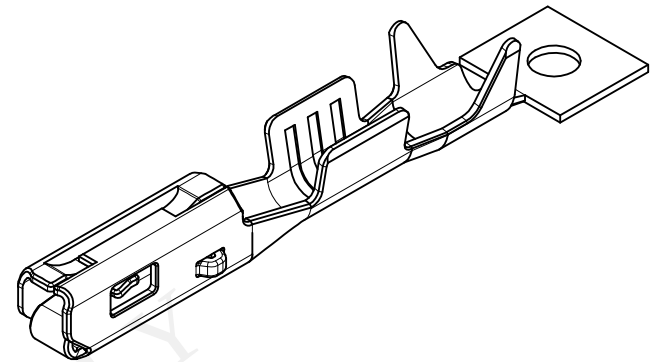


CONDUCTOR CRIMP



SECTION W-W

INSULATION CRIMP



SECTION X-X

NOTES:

1. MATERIAL: COPPER ALLOY (MIN. 1 MICRON HOT DIPPED Sn PREPLATED)
2. PACKAGING: REFER TO PK-36799-001(TO BE DEVELOPED).
3. APPLICATION SPECIFICATION: REFER TO AS-36783-001(TO BE DEVELOPED).
4. PRODUCT SPECIFICATION: REFER TO PS-36783-001/PS-36790-001(TO BE DECIDED).
5. USE WITH 36792/36807

TABLE A

MOLEX P/N	GRIP CODE	METRIC (mm ²) WIRE SIZE	DIM A	DIM B	DIM ØC	DIM ØD	DIM E	DIM F
367990001	M	0.75-1.00	2.51	3.07	1.50	1.98	2.64	3.25
367990002	S	0.35-0.50	1.91	2.47	1.00	1.54	1.94	2.60

INITIAL RELEASE EC NO: 12013-0004 DRN:PKRISHNAN01 2012/07/05 CHKD: APPR:VUTTARKAR 2012/07/17 1	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY PKRISHNAN01	DATE 2012/07/05	TITLE MX 120G FEMALE TERMINAL	
						CHECKED BY	DATE		
						APPROVED BY VUTTARKAR	DATE 2012/07/17		
						MATERIAL NO.	DOCUMENT NO.		
			ANGULAR ±1/2°		SEE TABLE A		SD-36799-001		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				