
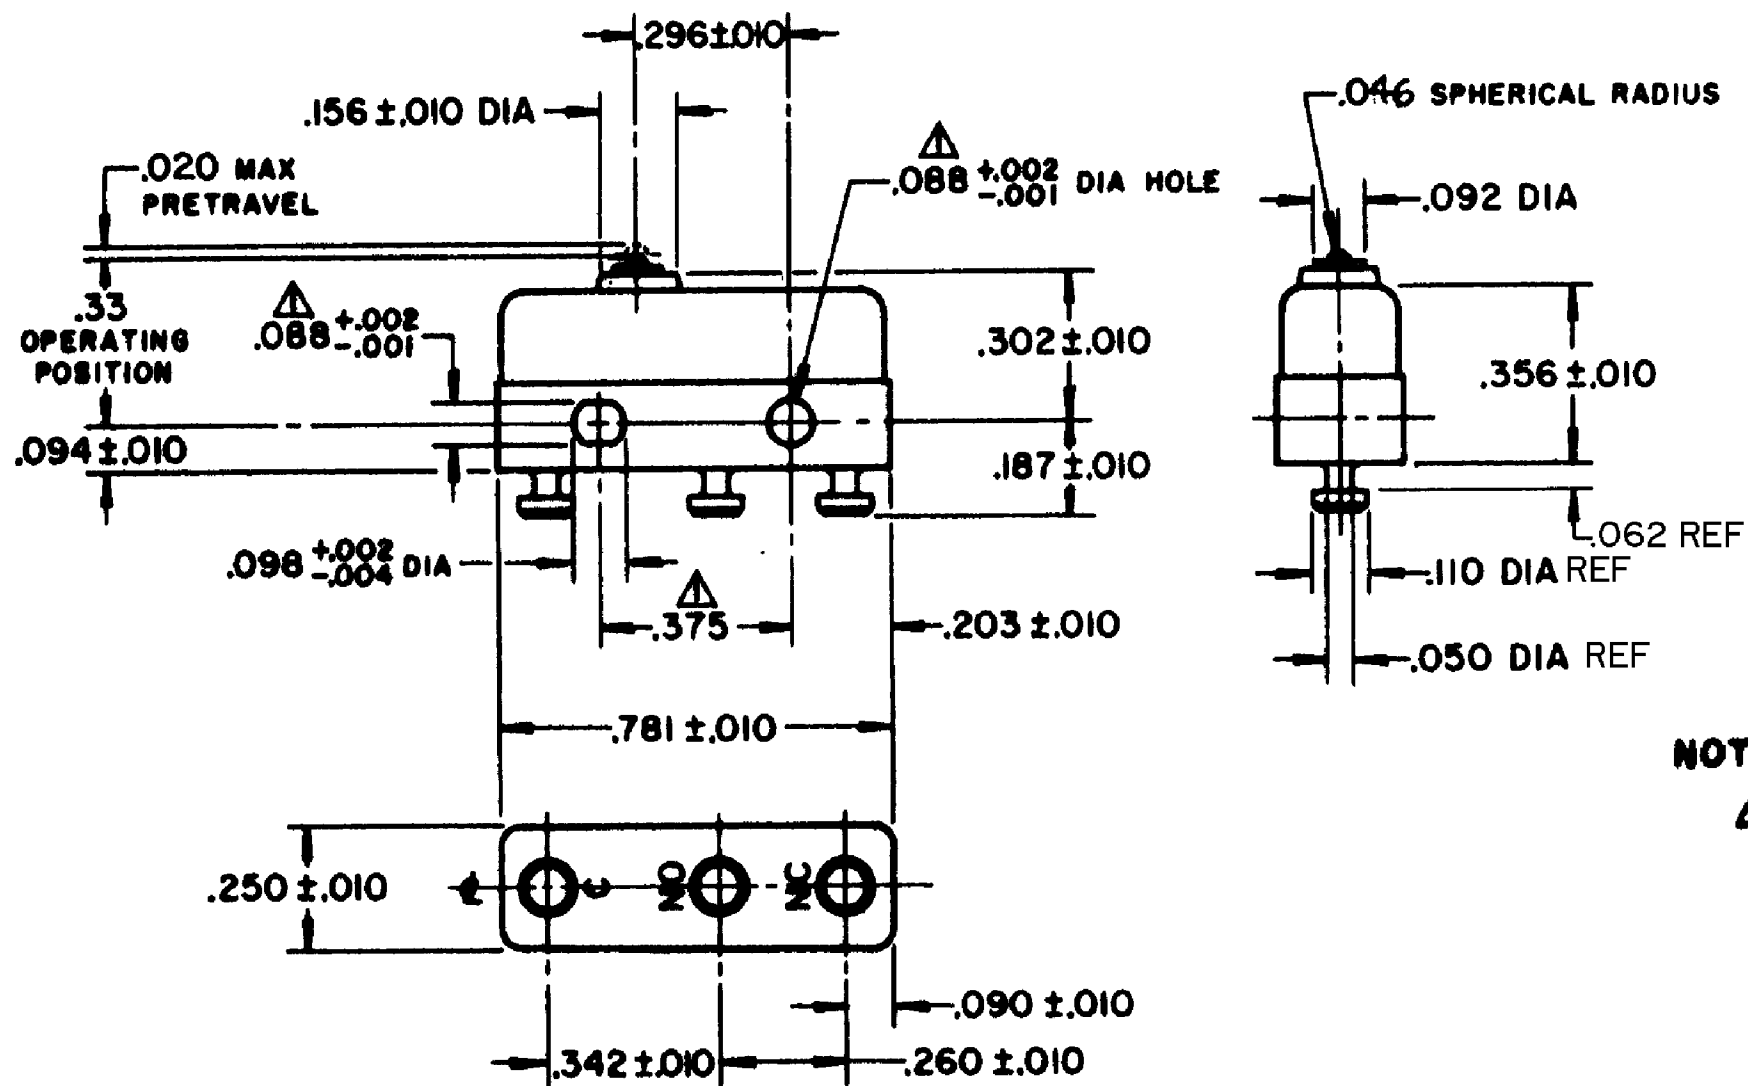


REV	DOCUMENT	CHANGED BY	CHECK
8	0093246	DJS 03OCT12	CMH

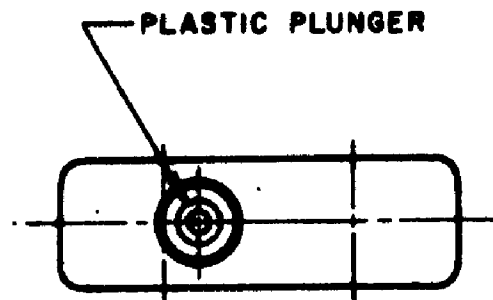

**△-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING
3-SWITCH WILL WITHSTAND TEMPERATURE OF 400° F**

RELEASE NO.	SR - 9651
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	VK	27 NOV 07	Honeywell															
OPERATING FORCE — — — — 3 - 5 OZ		APPROVALS <table><tr><td>KEMA, CE</td><td>5A, 250V ~ T85 1E4</td><td></td><td></td></tr><tr><td>UL</td><td>5A, 250 VAC 0.3A 125 VDC</td><td></td><td>BRAND L172</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>				KEMA, CE	5A, 250V ~ T85 1E4							UL	5A, 250 VAC 0.3A 125 VDC		BRAND L172					CHECK	RJ	27 NOV 07
KEMA, CE	5A, 250V ~ T85 1E4																							
UL	5A, 250 VAC 0.3A 125 VDC						BRAND L172																	
RELEASE FORCE— — — — — 1 OZ MIN		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				SIZE B				TYPE I	DRAWING NAME 11SM244-T		REV 8									
DIFFERENTIAL TRAVEL— — — .004 MAX																								
OVERTRAVEL — — — — — .005 MIN						RASTER			SCALE	NONE	WEIGHT .006 LB MAX		SHEET 1 OF 1											