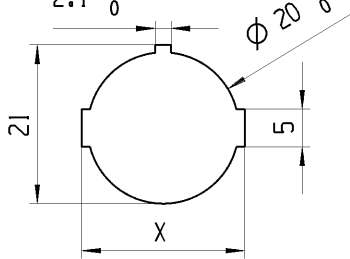
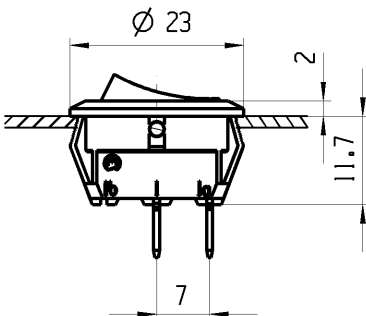
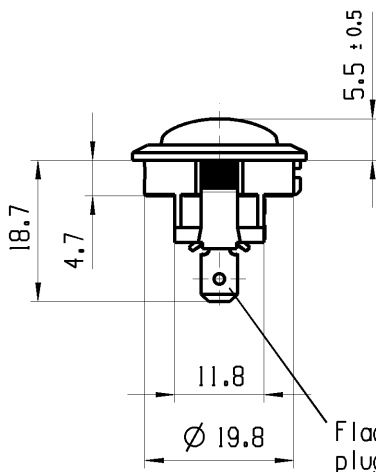






1		2		3		4	
A	Empfohlener Plattenausschnitt suggested panel cutout		Plattendicke panel thickness		X		
			0.75-1.25		21.2 -0.1		
			1.25-2.00		21.4 -0.1		
			2.00-3.00		21.8 -0.1		
B							Flachstecker aehnli. plug-in sim. DIN 46 244-A4.8-0.8
							
C							
D							
E	Aufschrift Marking		Aufschriftbeschreibung marking description		Ausschalter 1-polig Fuer Geræete der Klasse II geeignet		
	Ⓜ				SPST		
	18.. 8(18)/250~5E4 12(14)/250~ 5/70A 250V~ T100/55 05		RI49: 15A 125-250V AC 3/4 HP 125V AC 1 1/2 HP 250V AC		suitable for appliances of class II		
	RI49 						
fuer Form und Lage FOR SHAPE AND LOC.		fuer Winkel FOR ANGLE		ALLGEMEINTOLERANZEN UNTOLERANCED DIMENSIONS		Pause COPY	
							
c 54873 10/26/07 LX		b 45331 02/17/06 MUT		a 45770 02/09/06 MUT		44731 10/11/05 MUT	
Ausg. Aenderung gez. ISSUE REVISION DRAWN BY		Ausg. Aenderung gez. ISSUE REVISION DRAWN BY		Ausg. Aenderung gez. ISSUE REVISION DRAWN BY		Ersatz fuer/REPLACEMENT OF V05140300	
						GERAETESCHALTER APPLIANCE SWITCH	
						 MARQUARDT	