


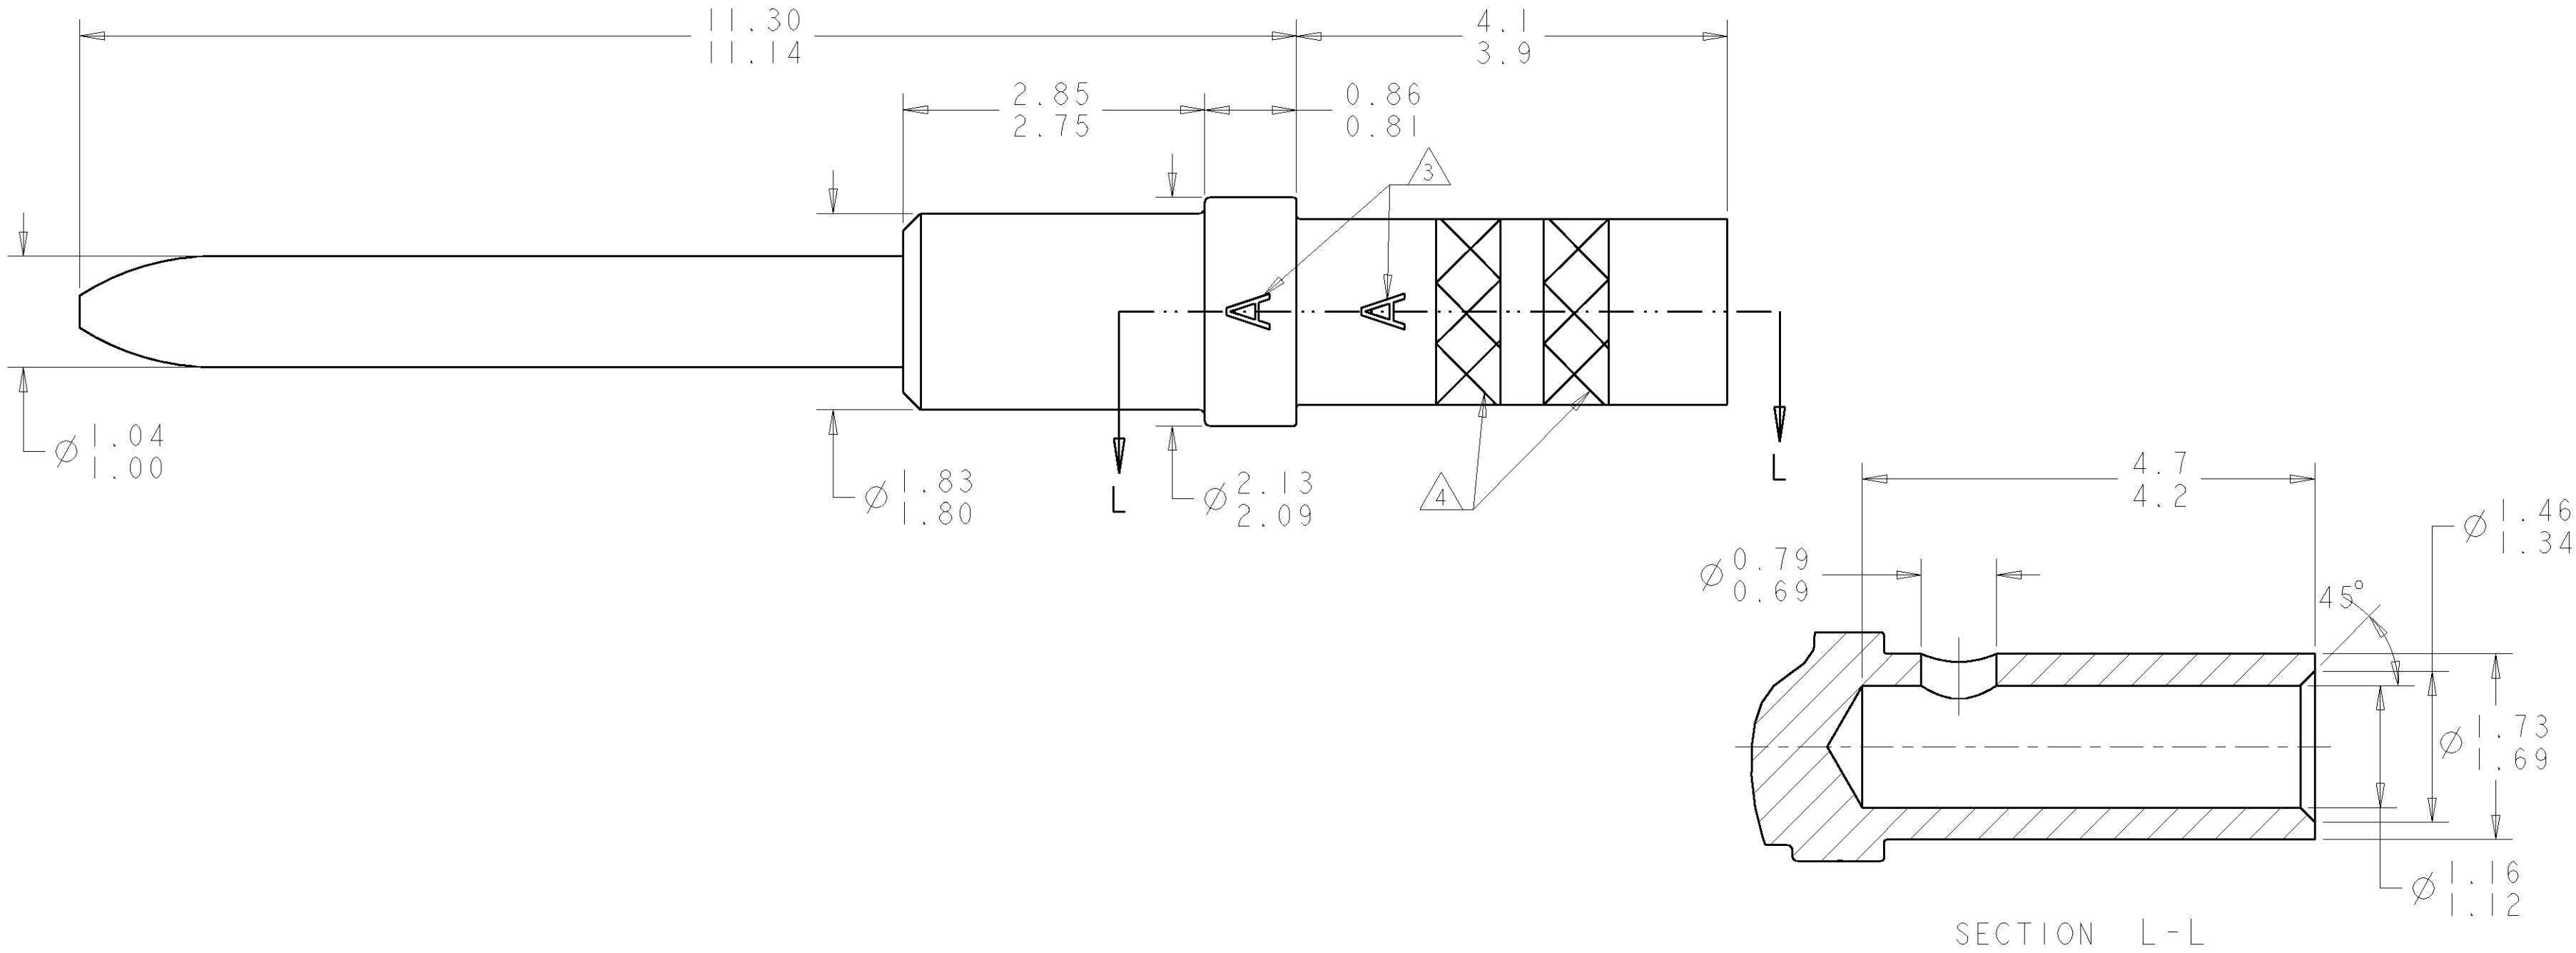

1. COPPER ALLOY C97
2. 1.27 µm MIN GOLD PER ASTM B488 OVER 2.54 µm MIN NICKEL PER QQ-N-290 ON ENTIRE STOCK.
3. OPTIONAL LOCATIONS OF THE LETTER "A" MARKING
OPTIONAL ALTERNATE MARKING: LETTER "S"
4. RED COLOR BANDS
5. APPLICABLE WIRE SIZE: 20-22-24 AWG
WIRE INSULATION DIAMETER: 1.8 mm MAX
INSULATION STRIP LENGTH: 3.65-4.15 mm
6. APPLICATION TOOLING:
CRIMPING TOOL: TYCO PART NUMBER 601966-1 (M22520/2-01)
POSITIONER: TYCO PART NUMBER 601966-5 (M22520/2-08)
SELECTOR POSITION: AWG 20: 7
AWG 22: 6
AWG 24: 5
CONTACT INSERTION/EXTRACTION TOOL: 91067-2 (M81969/1-02)
7. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIALL SA.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN BW	08APR2005	tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK JPM	08APR2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JPM	08APR2005	NAME PIN CONTACT, SIZE 20, GPR	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A200779	CAGE CODE C-1738011
MATERIAL 1		CUSTOMER DRAWING		DRAWING NO 1738011-1	RESTRICTED TO -
				SCALE 20:1	SHEET 1 OF 1