



N

LATCHING

S.P.D.T. SWITCH

Page
1 / 2

OPTIONS: INDICATOR /SELF CUT-OFF / TTL DRIVE

FREQUENCY RANGE
IMPEDANCE

: 0 - 12.4 GHz

: 50 Ohms

FREQUENCY (GHz)	0 - 1	1 - 2	2 - 3	3 - 8	8 - 12.4
V.S.W.R. <=	1.15	1.20	1.25	1.35	1.50
INSERT. LOSS <=	0.15 dB	0.20 dB	0.25 dB	0.35 dB	0.50 dB
ISOLATION >=	85 dB	80 dB	75 dB	70 dB	60 dB
AVER. POWER (*)	700 W	500 W	400 W	250 W	200 W

ACTUATOR
NOMINAL CURRENT AT 25°C (±10%)
ACTUATOR VOLTAGE (V_{CC})
TERMINALS
INDICATOR RATING
SELF CUT-OFF TIME
TTL INPUTS (E) - High level
 - Low level

: LATCHING

: 320 mA

: 12V (10.2 to 13V) /NEGATIVE COMMON

: male D-sub 9 pins (4-40 UNC nuts)

: 1 W / 30 V / 100 mA

$$: 40 \text{ ms} < CT < 120 \text{ ms}$$
: 2.2 to 5.5V / 800 μ A at 5V

: 0 to 0.8V / 20 μ A at 0.8V

CONNECTORS
LIFE
SWITCHING TIME (nominal voltage; 25° C)
CONSTRUCTION
WEIGHT

: N fem. per MIL C 39012

```

: 1.000.000 cycles

```

: < 15 ms

```
: splashproof
```

: < 185 g

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(* : average power at 25° C)

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



R570.162.105

DRAWING


General tolerance: * 0,5 mm

issue

Page
2/2

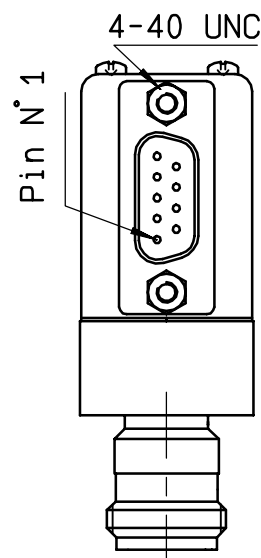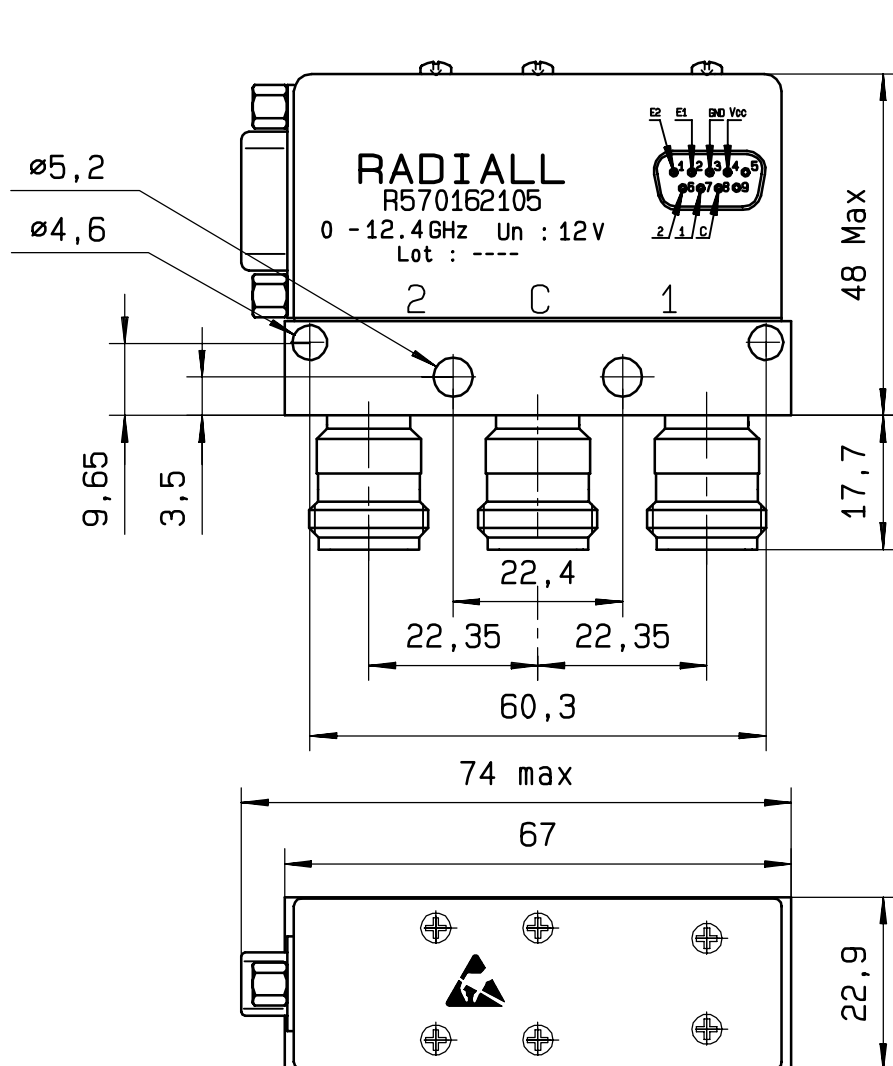


D-SUB 9 pins
bottom view



SCHEMATIC DIAGRAM

TTL input	RF continuity	Indicator
E1=1 E2=0	C ↔ 1	C . 1
E1=0 E2=1	C ↔ 2	C . 2
E1=0 E2=0	Memory	—
E1=1 E2=1	Forbidden	—

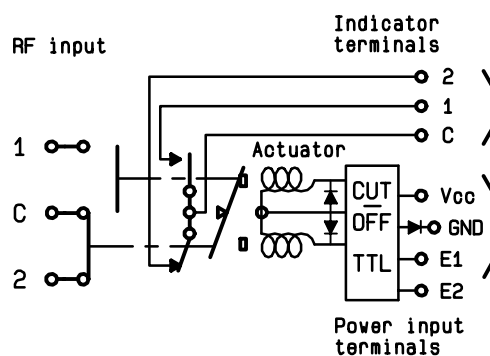

ISSUE 22. jan.08