


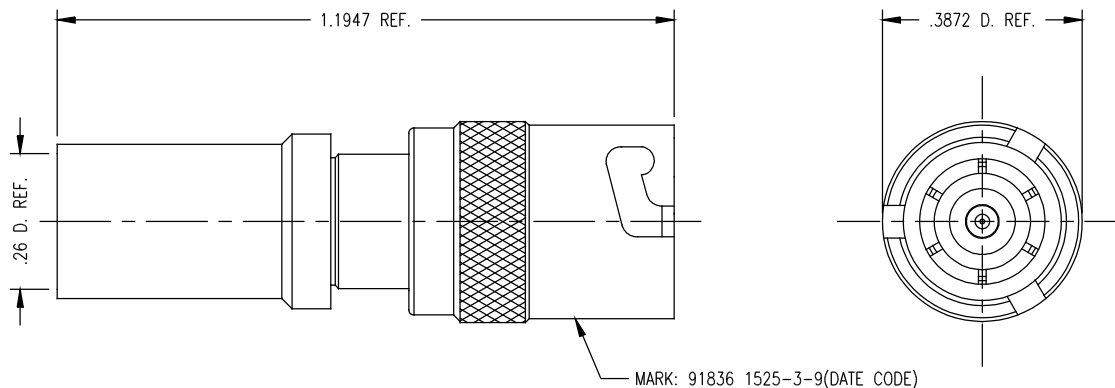

NOTES:

1. FOR USE WITH BOEING BMS 13-65-0G AND ADAMS RUSSELL FC20Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-1.
3. FOR CRIMPING USE DIE KTH-2242.
4. CONTACT P/N 1-7588-1M9D TO BE SUPPLIED UNASSEMBLED.
5. MARK PACKAGE: HS5982-1
1525-3-9
91836
(DATE CODE)
6. MATERIALS:
GASKET: SIL. RUBBER, A-A-59588
INSULATOR: TEFLON, ASTM D1710
SPRING: STAINLESS STEEL WIRE
OUTER CONTACT: BER. COPPER, ASTM B196
ALL OTHER PARTS: BRASS, ASTM B16
7. FINISHES:
CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM B488 OVER
.000050 MIN. NICKEL PER AMS-QQ-N-290 (RoHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290 OVER
.000050 MIN COPPER PER ASTM B734 (RoHS)
8. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50~W
FREQUENCY RANGE: DC TO 10 GHz
VOLTAGE RATING: 500 VOLTS RMS
VSWR: 1.35 MAX UP TO 10 GHZ.
9. CONNECTOR WEIGHT: 6.6 GRAMS

1525-3-9

REVISIONS		
ISSUE	CHANGES	
0	ER 36357 ME 06/07/95	
1	CN 36957 D KH 05/10/96	
2	CN 38206 C BDH 02/06/01	
3	CN 39598 D AM 08/29/06	
E	ER 6515 BAM 02/19/08	
F	REVISED PER DMF304 & ER041236 KPL 04/05/12	
CUSTOMER SALES DRAWING		
THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.		
SCALE		
APPROX SURFACE AREA		
WAS: E-18859		
CAGE CODE: 91836		
REF: Mc D. DOUGLAS #HS5982-1 REV. -		
PL, TPS		
DRAWN	ME	DATE 06/05/95
DESIGN	AR	DATE 06/05/95
APPR.		DATE
Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492		
1525-3-9		