



TOP VIEW

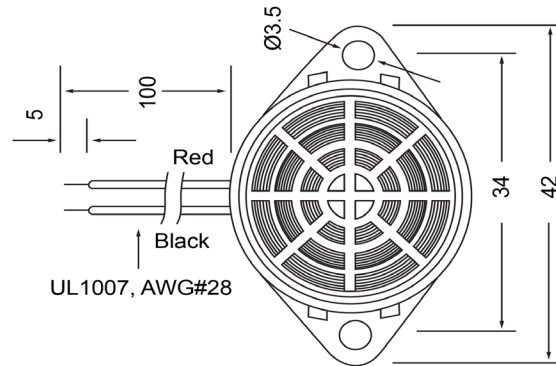

SIDE VIEW

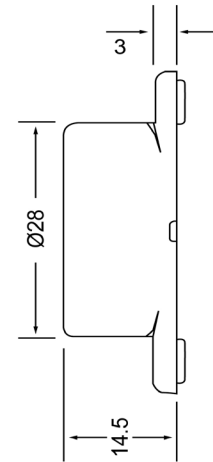

Specifications			Notes	Revision History										
Description	Value	Unit		Version	Description		Date	Approved						
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S						
Resonant Frequency	2,800	(Hz)												
Rated Voltage	6	(V)												
SPL @ 10cm	95	(dBA)												
Tone	Single													
Mount Type	Flange Mount													
Voltage Range	4 ~ 9	(V)												
Max Rated Current	35	(mA)												
Housing Material	ABS													
Operating Temperature	-20 ~ +60	°C												
Storage Temperature	-20 ~ +60	°C												
Weight	17	(g)												
					Electro-Mechanical Indicator			IE282806-1						
			Drawn by		Date		Checked by		Date		Approved by		Date	
			A.B.		10/21/2013		C.E.		10/21/2013		J.S		10/21/2013	