



Scan this tag to get the latest product information for the New Family of Disconnect Switches and Accessories.



# Disconnect Switches

## Section Contents

### Page

#### Compact Circuit Protector (CCP) disconnect switches

|                                             |         |
|---------------------------------------------|---------|
| 30A Class CC, Midget & 10x38 .....          | 380-381 |
| 30A 60A and 100A Class CF .....             | 382-383 |
| CCPB - Compact Circuit Protector Base ..... | 384-385 |

#### UL 98 fused disconnect switches 30 to 800A

|                                        |         |
|----------------------------------------|---------|
| Introduction & Agency Information..... | 386     |
| Product Line Summary.....              | 387     |
| 30A Compact Class CC & Class J .....   | 388-389 |
| 30A Class J .....                      | 390-391 |
| 60A Compact Class J .....              | 392-393 |
| 60A Class J .....                      | 394-395 |
| 100A Class J .....                     | 396-397 |
| 200A & 400A Class J .....              | 398-400 |
| 600A Class J and 800A Class L .....    | 402-403 |

#### UL 98 non-fused disconnect switches 30 to 1200A

|                                           |         |
|-------------------------------------------|---------|
| Introduction & Agency Information.....    | 404     |
| Product Line Summary.....                 | 405     |
| 30A, 60A and 100A Compact .....           | 406-407 |
| 100A, 200A and 400A Standard .....        | 408-409 |
| 600A, 800A, 1000A and 1200A Standard..... | 410-411 |

#### UL 508 non-fused disconnect switches 16 to 80A

|                                           |         |
|-------------------------------------------|---------|
| Introduction and Agency Information.....  | 412     |
| Product Line Summary.....                 | 413     |
| 16A, 25A, 40A, 63A and 80A Standard ..... | 414-416 |

#### Enclosed UL 98 & UL 508 disconnect switches

|                                        |         |
|----------------------------------------|---------|
| Introduction & Agency Information..... | 417     |
| <b>Fused UL 98</b>                     |         |
| 30A to 800A Enclosed Disconnects ..... | 418-419 |
| <b>Non-Fused UL 98</b>                 |         |
| 30 to 1200A Enclosed Disconnects.....  | 420-421 |
| <b>Non-Fused UL 508</b>                |         |
| 16 to 80A Enclosed Disconnects.....    | 422-423 |

#### Fused, dead front disconnect switches .....424

# Compact Circuit Protector (CCP) Disconnect Switch—30A

## 1-, 2- & 3-Pole, Class CC, UL Midget & 10x38mm IEC



| Switch                                                                      |            |                 |         |        |                       |         |         |         |                           |                  |             |
|-----------------------------------------------------------------------------|------------|-----------------|---------|--------|-----------------------|---------|---------|---------|---------------------------|------------------|-------------|
| Amp Rating                                                                  | Fuse Class | Number of Poles | Volts   | SCCR   | Max Horsepower Rating |         |         |         | Wire Size                 | Wire Type*       | Part Number |
|                                                                             |            |                 |         |        | 120 Vac               | 240 Vac | 480 Vac | 600 Vac |                           |                  |             |
| 30                                                                          | CC         | 1               | 600Vac  | 200kA  | 0.5                   | —       | —       | —       | Single/Dual #18-6 Sol/Str | 75°C Cu          | CCP-1-30CC  |
| 30                                                                          | CC         | 2               | 600Vac  | 200kA  | —                     | 2       | —       | —       |                           | 75°C Cu          | CCP-2-30CC  |
| 30                                                                          | CC         | 3               | 600Vac  | 200kA  | —                     | 3       | 4       | 7.5     |                           | 75°C Cu          | CCP-3-30CC  |
| 30                                                                          | UL Midget  | 1               | 240Vac† | 10kA†  | —                     | —       | —       | —       | Single #4 Sol/Str         | 75°C Cu          | CCP-1-30M   |
| 32**                                                                        | 10x38 IEC  |                 | 400Vac† | 120kA† |                       |         |         |         |                           |                  |             |
| 30                                                                          | UL Midget  | 2               | 240Vac† | 10kA†  | —                     | —       | —       | —       |                           | Spade Terminal†† | 75°C Cu     |
| 32**                                                                        | 10x38 IEC  |                 | 400Vac† | 120kA† |                       |         |         |         |                           |                  |             |
| 30                                                                          | UL Midget  | 3               | 240Vac† | 10kA†  | —                     | —       | —       | —       | 75°C Cu                   |                  | CCP-3-30M   |
| 32**                                                                        | 10x38 IEC  |                 | 400Vac† | 120kA† |                       |         |         |         |                           |                  |             |
| 30                                                                          | CC         | 1               | 80Vdc†  | 20kA†  | —                     | —       | —       | —       |                           | 75°C Cu          | CCP-1-30DCC |
| 30                                                                          | CC         | 1               | 80Vdc†  | 10kA†  | —                     | —       | —       | —       | 75°C Cu                   | CCP-1-30DCM      |             |
| 32**                                                                        | 10x38 IEC  |                 |         |        |                       |         |         |         |                           |                  |             |
| * 75°C or higher.                                                           |            |                 |         |        |                       |         |         |         |                           |                  |             |
| ** 32A Class aM, 25A Class gG.                                              |            |                 |         |        |                       |         |         |         |                           |                  |             |
| † SCCR May be lower, refer to installed fuse data sheets.                   |            |                 |         |        |                       |         |         |         |                           |                  |             |
| †† Spade terminal, 30A max, insulated flange, wire size #12-10 for #8 stud. |            |                 |         |        |                       |         |         |         |                           |                  |             |

### Specifications

#### Agency Information

- CE Compliant
- RoHS Compliant
- For **Class CC** fuse version
  - UL 98 Listed, File E302370, Guide WHTY
  - cULus to CSA Standard 22.2 No. 4-04, File 302370, Guide WHTY7
- For **UL Midget and 10X38 IEC** fuse version
  - UL 508 Listed, File E161278, Guide 8R29
  - cULus Certified 22.2 No. 14-05
  - IEC 60947-3 AC23A
  - IEC 60947-3 DC23A

#### Terminals

- Single/dual conductor box lug or spade terminal suitable for line, load or accessory connection
- Torque: - #18-10 20Lb-In  
- #8-4 35Lb-In

#### Storage and Operating Temperature

- -20°C to 75°C\*
- \* For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann publication titled *Selecting Protective Devices (SPD)*, reorder #3002.

#### Flammability Rating UL 94V0

#### Lockout/Tagout Provisions

- 4mm shank lock or standard pin-out devices

#### Mounting

- 35mm DIN-Rail

#### Local Open Fuse Indication Minimum Voltage\*\*

- 90Vac for AC versions
- 12Vdc for DC versions


\*\* Circuit must be closed for indication light to illuminate.

### Features

- IP20 Finger-safe construction with #10 or larger wire
- Switch interlock prohibits removing the fuse under load

### Accessories

- Auxiliary contacts
- PLC Wired remote fuse indication

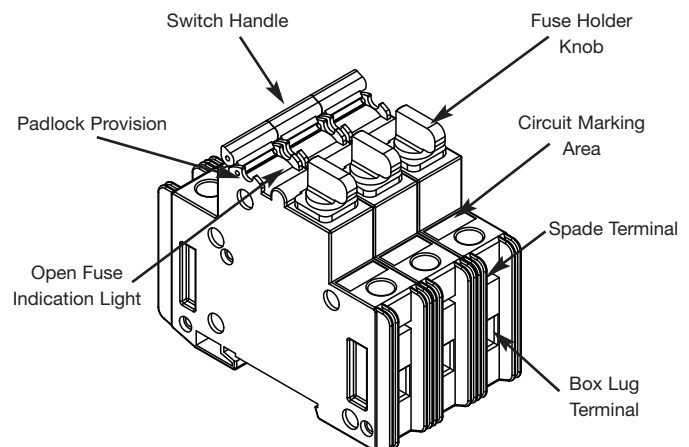

### Available Bussmann Fuses



| Class | Type                               | Data Sheet # |
|-------|------------------------------------|--------------|
| CC    | LP-CC Time-Delay, Current Limiting | 1023         |
| CC    | FNQ-R Time-Delay                   | 1014         |
| CC    | KTK-R Fast-Acting                  | 1015         |
| M     | FNM Time-Delay                     | 2028         |
| M     | FNQ Time-Delay                     | 1012         |
| M     | KTK Fast-Acting                    | 1011         |
| M     | BAF Fast-Acting                    | 2011         |
| M     | KLM Fast-Acting 600Vac/dc          | 2020         |

Data Sheet: 1157

# Compact Circuit Protector (CCP) Disconnect Switch—30A

1-, 2- & 3-Pole, Class CC, UL Midget & 10x38mm IEC

Dimensions – mm (in)  
Class CC, UL Midget & 10x38 IEC

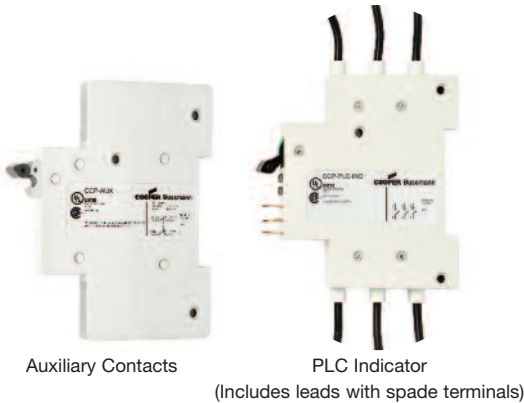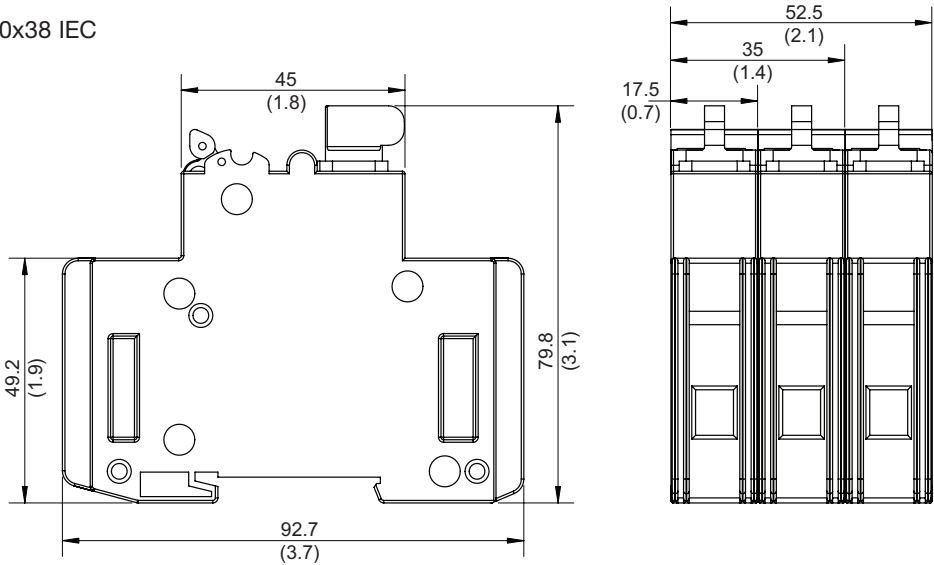

| CCP- _30_ Accessories                             |               |               |                         |                                                           |              |
|---------------------------------------------------|---------------|---------------|-------------------------|-----------------------------------------------------------|--------------|
| Description                                       | Configuration | Signal Output | Minimum Circuit Voltage | Agency Information                                        | Part Number  |
| Auxiliary Contacts NO+NC for Switch Status        | 1 per CCP     | 5A/240Vac     | –                       | UL 98 Recognized, cURus 22.2 No. 4-04, IEC 60947-5-1 AC15 | CCP-AUX*     |
| Wired Remote Fuse Indication for PLC Applications | 1 per CCP     | 24Vdc         | 100Vac                  | UL 98 Recognized, cURus 22.2 No. 4-04                     | CCP-PLC-IND* |
| * Refer to Data Sheet # 1157 for details.         |               |               |                         |                                                           |              |

# Compact Circuit Protector (CCP) Disconnect Switch—30, 60 & 100A 1-, 2- & 3-Pole, Class CF CUBEFuse™



| Switch                                                                      |            |                 |                  |       |                       |         |         |         |                              |                     |             |
|-----------------------------------------------------------------------------|------------|-----------------|------------------|-------|-----------------------|---------|---------|---------|------------------------------|---------------------|-------------|
| Amp Rating                                                                  | Fuse Class | Number of Poles | Volts            | SCCR  | Max Horsepower Rating |         |         |         | Wire Size                    | Wire Type*          | Part Number |
|                                                                             |            |                 |                  |       | 120 Vac               | 240 Vac | 480 Vac | 600 Vac |                              |                     |             |
| 30                                                                          | CF         | 1               | 600Vac<br>125Vdc | 200kA | 1.5                   | —       | —       | —       | Single/Dual<br>#18-6 Sol/Str | 75°C Cu             | CCP-1-30CF  |
| 30                                                                          | CF         | 2               | 600Vac<br>125Vdc | 200kA | —                     | 3       | —       | —       |                              | 75°C Cu             | CCP-2-30CF  |
| 30                                                                          | CF         | 3               | 600Vac<br>125Vdc | 200kA | —                     | 5       | 15      | 10      |                              | 75°C Cu             | CCP-3-30CF  |
| 60                                                                          | CF         | 1               | 600Vac<br>125Vdc | 200kA | 3                     | —       | —       | —       | Single<br>#4 Sol/Str         | 75°C Cu             | CCP-1-60CF  |
| 60                                                                          | CF         | 2               | 600Vac<br>125Vdc | 200kA | —                     | 7.5     | —       | —       | Spade<br>Terminal**          | 75°C Cu             | CCP-2-60CF  |
| 60                                                                          | CF         | 3               | 600Vac<br>125Vdc | 200kA | —                     | 7.5     | 20      | 10      |                              | 75°C Cu             | CCP-3-60CF  |
| 100                                                                         | CF         | 1               | 600Vac           | 200kA | 5                     | —       | —       | —       | Single<br>#8-10 Sol/Str      | 75°C Cu             | CCP-1-100CF |
| 100                                                                         | CF         | 2               | 600Vac           | 200kA | —                     | 10      | —       | —       | #8-1 Str<br>Dual #6 Str      | 75°C Cu             | CCP-2-100CF |
| 100                                                                         | CF         | 3               | 600Vac           | 200kA | —                     | 20      | 50      | 50      |                              | Spade<br>Terminal** | 75°C Cu     |
| * 75°C or higher.                                                           |            |                 |                  |       |                       |         |         |         |                              |                     |             |
| ** Spade terminal, 30A max, insulated flange, wire size #12-10 for #8 stud. |            |                 |                  |       |                       |         |         |         |                              |                     |             |

\* 75°C or higher.

\*\* Spade terminal, 30A max, insulated flange, wire size #12-10 for #8 stud.

## Specifications

### Agency Information

- CE Compliant
- RoHS Compliant
- UL 98 Listed, File E302370, Guide WHTY
- cULus to CSA Standard 22.2 No. 4-04, File 302370, Guide WHTY7

### Terminals

- Single/dual conductor box lug or spade terminal suitable for line, load or accessory connection
- Torque: 0-60A: - #18-10 20Lb-In  
- #8-4 35Lb-In  
70-100A: - #18-10 Single 25Lb-In  
- #8-2 Single 35Lb-In  
- #1 Single 40Lb-In  
- #6 Dual 45Lb-In

### Fuses

- Uses finger-safe Class CF CUBEFuse™ with Class J performance
  - Low-Peak™ dual-element, time-delay\*
  - Non-indicating 1-100A
  - Indicating 6-100A
  - Fast-Acting\*\* 1-100A

\* See Data Sheet # 9000

\*\* See Data sheet # 2147

### Storage and Operating Temperature

- -20°C to 75°C\*\*\*

\*\*\* For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann publication titled *Selecting Protective Devices (SPD)* reorder #3002.

### Flammability Rating UL 94V0

### Lockout/Tagout Provisions

- 4mm shank lock or standard pin-out devices

Data Sheet: 1157

### Mounting

- 35mm DIN-Rail

### Local Open Fuse Indication Minimum Voltage†

- 90Vac/115Vdc


† Circuit must be closed for indication light to illuminate.

### Features

- Ampacity rejecting disconnects will not accept CUBEFuse amp ratings greater than switch rating
- IP20 Finger-safe construction with #10 or larger wire
- Switch interlock prohibits removing the fuse under load

### Accessories


- Auxiliary contacts
- PLC Wired remote fuse indication (up to 60A)

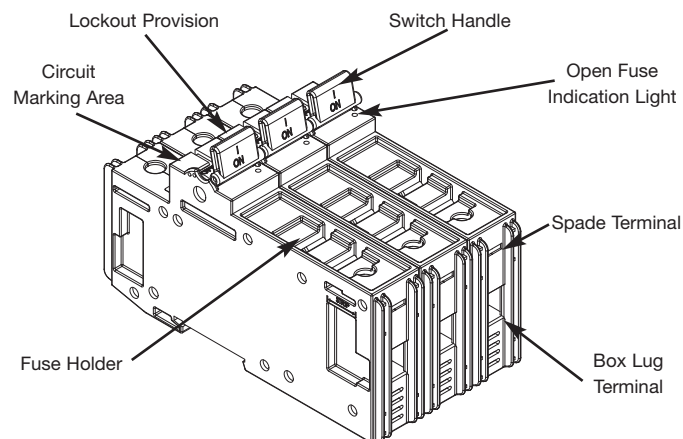



# Compact Circuit Protector (CCP) Disconnect Switch—30, 60 & 100A 1-, 2- & 3-Pole, Class CF CUBEFuse™

## Dimensions – mm (in)

30 and 60 Amp

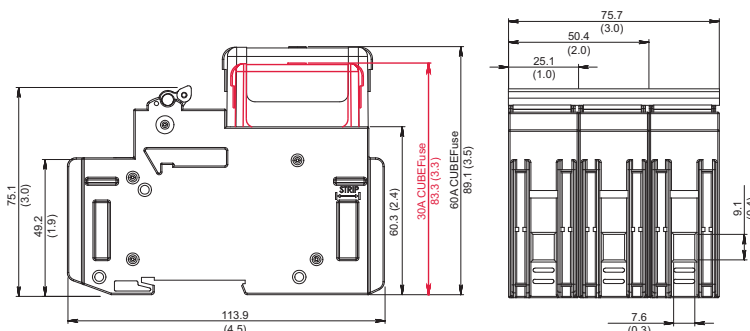

100 Amp

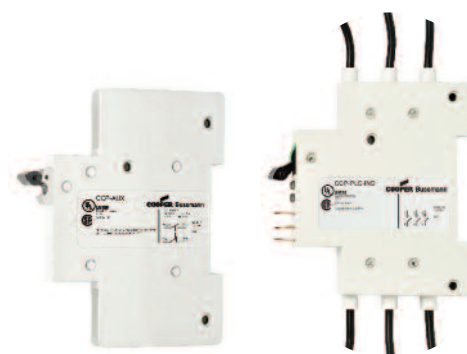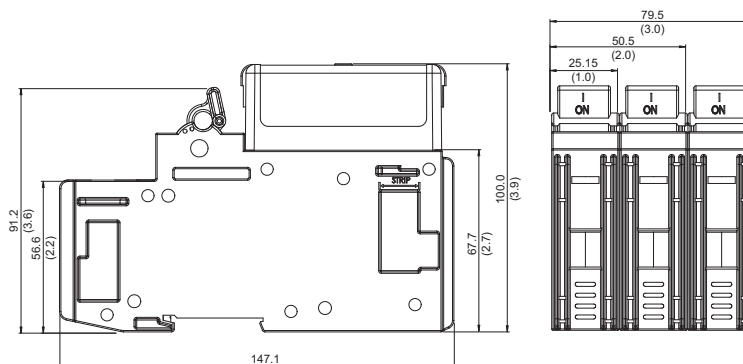

Auxiliary Contacts

PLC Indicator  
(Includes leads with spade terminals)

## CCP- \_ \_ CF Accessories

| Description                                                 | Configuration | Signal Output | Minimum Circuit Voltage | Agency Information                                        | Part Number  |
|-------------------------------------------------------------|---------------|---------------|-------------------------|-----------------------------------------------------------|--------------|
| Auxiliary Contacts NO+NC for Switch Status up to 60A        | 1 per CCP     | 5A/240Vac     | –                       | UL 98 Recognized, cURus 22.2 No. 4-04, IEC 60947-5-1 AC15 | CCP-AUX*     |
| Auxiliary Contacts NO+NC for Switch Status 70 to 100A       | 1 per CCP     | 5A/240Vac     | –                       | UL 98 Recognized, CSA C22.2 No. 4                         | CCP-AUX-100* |
| Wired Remote Fuse Indication for PLC Applications           | 1 per CCP     | 24Vdc         | 100Vac                  | UL 98 Recognized, cURus 22.2 No. 4-04                     | CCP-PLC-IND* |
| Wired Remote Fuse Indication for PLC Applications up to 60A | 1 per CCP     | 8A/24Vdc      | 100Vac                  | UL 98 Recognized, CSA C22.2 No. 4                         | CCP-PLC-100* |

\* Refer to Data Sheet # 1157 for details.



## Compact Circuit Protector Base (CCPB) CUBEFuse™



RoHS

The revolutionary Bussmann CCPB with CUBEFuse™ is designed as a fused branch circuit disconnect with fuse holder for the Bussmann Quik-Spec™ Coordination Panelboard. The CCPB with CUBEFuse simplifies selective coordination and allows for isolation of individual branch circuit loads for safe work practices.

### Product Features and Benefits

- Uses finger-safe Class CF Low-Peak™ CUBEFuse with current-limiting, time-delay Class J performance\*
- High Short-Circuit Current Ratings at 200kA
- Disconnect rated to provide means for load isolation
- Full voltage rated at 600Vac
- UL 98 Listed and suitable for branch circuit disconnect and branch circuit protection
- 1-, 2- and 3-pole versions are horsepower rated
- Patented rejection feature helps prevent overfusing
- Complies with UL and cULus
- Open fuse indication light per pole
- Additional open fuse indication can be provided by using the indicating CUBEFuse version
- Built-in switch/fuse interlock prohibits removing the fuse while energized
- Permanent lockout/tagout provisions
- Lock-ON provision

\*See data sheet 9000 for CUBEFuse specifications.

\*\*For fuse performance under or above 25°C, consult fuse performance derating charts.

### Specifications:

- CCPB Ampacity rejection breaks: 15A, 20A, 30A, 40A, 50A, 60A, 70A, 90A and 100A.
- 1-, 2- and 3-Pole versions
- For systems 600Vac (or less)
- Box lug loadside terminal:
  - 18-6AWG single & dual rated, solid or stranded – 75°C, Cu only
  - 4AWG single – 75°C, Cu only
- Box lug loadside terminal torque: 18-10AWG 20 Lb-In (2.2 N•m), 8-4AWG 35 Lb-In (3.9 N•m)
- Spade terminal load connection:
  - Max. 30A suitable for use with #8-32UNC screw
- Bolt-on style bus connector, #10-32-UNC Hex flange Phillips screw, torque to 25 Lb-In (2.8N•m)
- Lockout/tagout: 4mm shank lock
- Bolt-mounted design into Quik-Spec Coordination Panelboard bus
- Local indication: illumination requires closed circuit and minimum 90Vac operating voltage
- RoHS compliant

### Agency Information:

UL 98 Listed, File E302370, Guide WHTY  
cULus to CSA Standard 22.2 No. 4, File E302370, Guide WHTY7  
CE Compliant

**Shipping Weight:** 2.03 lbs per carton

**Carton quantity:** 6 poles

### Environmental Data

Storage and operating temperature: -20°C to 75°C\*\*

# Compact Circuit Protector Base (CCPB) CUBEFuse™

## Technical Ratings

| CCPB Part Numbers | Poles | Voltage Rating | CUBEFuse™<br>(Class J performance)       |                        |                                          | Max. Fuse** Ampacity | SCCR  | Hp Ratings***                        |
|-------------------|-------|----------------|------------------------------------------|------------------------|------------------------------------------|----------------------|-------|--------------------------------------|
|                   |       |                | Time-Delay Non-Indicating                | Time-Delay Indicating* | Fast-Acting Non-Indicating               |                      |       |                                      |
| CCPB-1-15CF       | 1     | 600Vac         | TCF1RN, TCF3RN, TCF6RN, TCF10RN, TCF15RN | TCF6, TCF10, TCF15     | FCF1RN, FCF3RN, FCF6RN, FCF10RN, FCF15RN | 15A                  | 200kA | 0.5Hp@120V                           |
| CCPB-2-15CF       | 2     |                |                                          |                        |                                          |                      |       | 1.5Hp@240V                           |
| CCPB-3-15CF       | 3     |                |                                          |                        |                                          |                      |       | 3Hp@240V<br>5Hp@480V<br>7.5Hp@600V   |
| CCPB-1-20CF       | 1     | 600Vac         | TCF17-1/2RN, TCF20RN                     | TCF17-1/2, TCF20       | FCF20RN                                  | 20A                  | 200kA | 0.75Hp@120V                          |
| CCPB-2-20CF       | 2     |                |                                          |                        |                                          |                      |       | 2Hp@240V                             |
| CCPB-3-20CF       | 3     |                |                                          |                        |                                          |                      |       | 3Hp@240V<br>7.5Hp@480V<br>10Hp@600V  |
| CCPB-1-30CF       | 1     | 600Vac         | TCF25RN, TCF30RN                         | TCF25, TCF30           | FCF25RN, FCF30RN                         | 30A                  | 200kA | 1.5Hp@120V                           |
| CCPB-2-30CF       | 2     |                |                                          |                        |                                          |                      |       | 3Hp@240V                             |
| CCPB-3-30CF       | 3     |                |                                          |                        |                                          |                      |       | 5Hp@240V<br>15Hp@480V<br>10Hp@600V   |
| CCPB-1-40CF       | 1     | 600Vac         | TCF35RN, TCF40RN                         | TCF35, TCF40           | FCF35RN, FCF40RN                         | 40A                  | 200kA | 2.0Hp@120V                           |
| CCPB-2-40CF       | 2     |                |                                          |                        |                                          |                      |       | 3Hp@240V                             |
| CCPB-3-40CF       | 3     |                |                                          |                        |                                          |                      |       | 7.5Hp@240V<br>20Hp@480V<br>10Hp@600V |
| CCPB-1-50CF       | 1     | 600Vac         | TCF45RN, TCF50RN                         | TCF45, TCF50           | FCF45RN, FCF50RN                         | 50A                  | 200kA | 3.0Hp@120V                           |
| CCPB-2-50CF       | 2     |                |                                          |                        |                                          |                      |       | 5Hp@240V                             |
| CCPB-3-50CF       | 3     |                |                                          |                        |                                          |                      |       | 7.5Hp@240V<br>20Hp@480V<br>10Hp@600V |
| CCPB-1-60CF       | 1     | 600Vac         | TCF60RN                                  | TCF60                  | FCF60RN                                  | 60A                  | 200kA | 3.0Hp@120V                           |
| CCPB-2-60CF       | 2     |                |                                          |                        |                                          |                      |       | 7.5Hp@240V                           |
| CCPB-3-60CF       | 3     |                |                                          |                        |                                          |                      |       | 7.5Hp@240V<br>20Hp@480V<br>10Hp@600V |
| CCPB-1-70CF       | 1     | 600Vac         | TCF70RN                                  | TCF70                  | FCF70RN                                  | 70A                  | 200kA | 3.0Hp@120V                           |
| CCPB-2-70CF       | 2     |                |                                          |                        |                                          |                      |       | 7.5Hp@240V                           |
| CCPB-3-70CF       | 3     |                |                                          |                        |                                          |                      |       | 15Hp@240V<br>30Hp@480V               |
| CCPB-1-90CF       | 1     | 600Vac         | TCF90RN                                  | TCF90                  | FCF80RN, FCF90RN                         | 90A                  | 200kA | 5.0Hp@120V                           |
| CCPB-2-90CF       | 2     |                |                                          |                        |                                          |                      |       | 10Hp@240V                            |
| CCPB-3-90CF       | 3     |                |                                          |                        |                                          |                      |       | 20Hp@240V<br>40Hp@480V               |
| CCPB-1-100CF      | 1     | 600Vac         | TCF100RN                                 | TCF100                 | FCF100RN                                 | 100A                 | 200kA | 5.0Hp@120V                           |
| CCPB-2-100CF      | 2     |                |                                          |                        |                                          |                      |       | 10Hp@240V                            |
| CCPB-3-100CF      | 3     |                |                                          |                        |                                          |                      |       | 20Hp@240V<br>50Hp@480V               |

\*1A and 3A indicating CUBEFuse not available. Correct fit with CCPB disconnect requires indicating CUBEFuse with date code R38 or later.

\*\*Any fuse with an amp rating less than or equal to the max fuse rating may be used. Example: TCF15 may be used with CCPB-1-20CF.

\*\*\*Do not use UPS/Critical Application fast-acting CF with motors.

## UL 98 Fused Rotary Disconnect Switches—30 to 800A

### Description

Bussmann UL 98 and UL 489 fused disconnect switches “break” and “make” power circuits ON and OFF load.

The switches employ double break contacts per pole that help ensure complete isolation of the fuse when the switch is in the “OFF” position.

### Features

- Make and break power under load
- Double break by pole
- DIN-Rail or panel mount (30-100A)
- Up to 200kA Short-Circuit Current Rating
- Finger-safe covers
- Compact footprints available
- Defeatable handles automatically re-latch when the panel door is closed
- Most disconnect switches are front, right side, flange or direct handle operable
- NFPA 79 Compliant handle kits


### Agency Information

- UL 98, Guide WHTY, File E155130
- UL 489, Guide WJAZ, File E359801
- CSA 22.2 No. 4, File 257020
- Conforms with IEC 60947-3
- NFPA 79 (2002 Edition)

### Online Resources

Visit [www.cooperbussmann.com/Disconnects](http://www.cooperbussmann.com/Disconnects) for:

- CAD Drawings
- Instruction Sheets
- UL Information

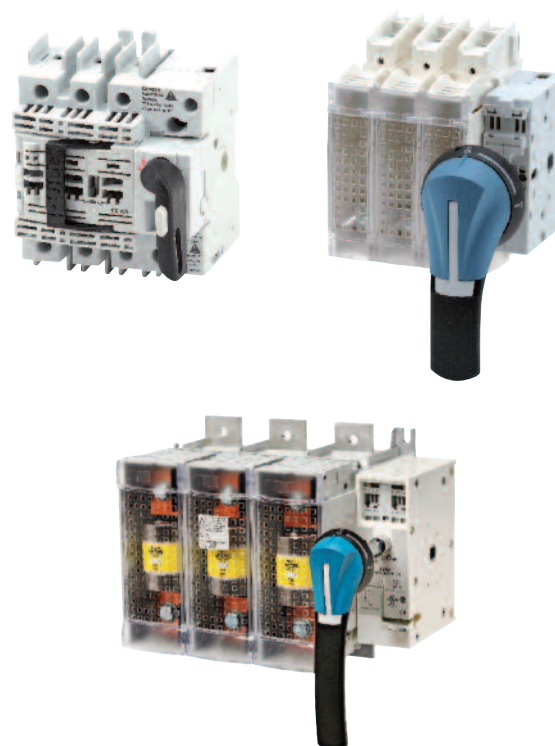

**QuikShip**   
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Bussmann representative for details.


### Available Bussmann Fuses

| Class | Type                               | Data Sheet #   |
|-------|------------------------------------|----------------|
| CC    | LP-CC Time-Delay, Current Limiting | 1023           |
| CC    | FNQ-R Time-Delay                   | 1014           |
| CC    | KTK-R Fast-Acting                  | 1015           |
| J     | LPJ Time-Delay, Current Limiting   | 1006 (0-60A)   |
| J     |                                    | 1007 (70-600A) |
| J     | With easyID™ open fuse indication  | 1062 (6-60A)   |
| J     |                                    | 1063 (70-600A) |
| J     | JKS Fast-Acting Fuses              | 1026 (0-60A)   |
| J     |                                    | 1027 (70-600A) |
| J     | DFJ High Speed Drive Fuse          | 1048 (0-600A)  |
| L     | KRP-C Time-Delay, Current Limiting | 1008           |
| L     | KTU Fast-Acting                    | 1010           |
| L     | KLU Time-Delay                     | 1013           |



# UL 98 Fused Rotary Disconnect Switches—30 to 800A

## Specifications

|                                   |  |  |  |  |  |
|-----------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                   | RDF30CC-3                                                                         | RDF30J-3 / RDF60J-3-COMP                                                          | RDF60J-3                                                                          | RDF200J-3                                                                           | RDF600J-3                                                                           |
| <b>Part Number</b>                |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| <b>2-Pole</b>                     | —                                                                                 | —                                                                                 | RDF30J-2                                                                          | RDF60J-2-COMP                                                                       | RDF60J-2                                                                            |
| <b>3-Pole</b>                     | RDF30CC-3                                                                         | RDF30J-3-COMP                                                                     | RDF30J-3                                                                          | RDF60J-3-COMP                                                                       | RDF60J-3                                                                            |
| <b>3-Pole + Neutral</b>           | RDF30CC-3N                                                                        | RDF30J-3N-COMP                                                                    | —                                                                                 | —                                                                                   | —                                                                                   |
| <b>4-Pole</b>                     | —                                                                                 | —                                                                                 | RDF30J-4                                                                          | RDF60J-4-COMP                                                                       | RDF60J-4                                                                            |
| UL Standard                       | UL 489                                                                            | UL 489                                                                            | UL 98                                                                             | UL 98                                                                               | UL 98                                                                               |
| Fuse Class                        | CC                                                                                | J                                                                                 | J                                                                                 | J                                                                                   | J                                                                                   |
| Max Fuse/Ampacity                 | 30                                                                                | 30                                                                                | 30                                                                                | 60                                                                                  | 60                                                                                  |
| Switch Type                       | Compact                                                                           | Compact                                                                           | Standard                                                                          | Standard                                                                            | Standard                                                                            |
| Handle Operation                  | Front                                                                             | Front                                                                             | Front/Side                                                                        | Front/Side                                                                          | Front                                                                               |
| <b>UL Electrical Ratings</b>      |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Max AC Volts                      | 600Vac                                                                            | 600Vac                                                                            | 600Vac                                                                            | 600Vac                                                                              | 600Vac                                                                              |
| Max DC Volts*                     | —                                                                                 | —                                                                                 | 250Vdc                                                                            | 250Vdc                                                                              | 250Vdc                                                                              |
| Std AC Horsepower Ratings         |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| 1-Phase, 240Vac                   | —                                                                                 | —                                                                                 | 3                                                                                 | 10                                                                                  | 10                                                                                  |
| 3-Phase, 240Vac                   | 3                                                                                 | 3                                                                                 | 3                                                                                 | 7.5                                                                                 | 7.5                                                                                 |
| 3-Phase, 480Vac                   | 5.0                                                                               | 5.0                                                                               | 5.0                                                                               | 15                                                                                  | 15                                                                                  |
| 3-Phase, 600Vac                   | 7.5                                                                               | 7.5                                                                               | 7.5                                                                               | 15                                                                                  | 15                                                                                  |
| Max AC Horsepower Ratings         |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| 3-Phase, 240Vac                   | 7.5                                                                               | 7.5                                                                               | 7.5                                                                               | 15                                                                                  | 15                                                                                  |
| 3-Phase, 480Vac                   | 15                                                                                | 15                                                                                | 15                                                                                | 30                                                                                  | 30                                                                                  |
| 3-Phase, 600Vac                   | 20                                                                                | 20                                                                                | 20                                                                                | 50                                                                                  | 50                                                                                  |
| DC Horsepower Ratings             |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| 125Vdc                            | —                                                                                 | —                                                                                 | 3                                                                                 | 5                                                                                   | 5                                                                                   |
| 250Vdc                            | —                                                                                 | —                                                                                 | 5                                                                                 | 10                                                                                  | 10                                                                                  |
| <b>Electrical Characteristics</b> |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| SCCR                              | 100kA                                                                             | 100kA                                                                             | 200kA                                                                             | 100kA                                                                               | 200kA                                                                               |
| Terminal Lugs/Kits                | Integral                                                                          | Integral                                                                          | Integral                                                                          | Integral                                                                            | Integral                                                                            |
| Mounting Torque - Lb-In (N·m)     | —                                                                                 | —                                                                                 | —                                                                                 | —                                                                                   | —                                                                                   |
| Wire Type                         | 75°C Cu                                                                           | 75°C Cu                                                                           | 75°C Cu                                                                           | 75°C Cu                                                                             | 75°C Cu                                                                             |
| Wire Range & Torque - Lb-In (N·m) |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Solid                             | #14-10                                                                            | #14-10                                                                            | #14-10                                                                            | #14-10                                                                              | #14-10                                                                              |
| Stranded                          | 27 (3.1)                                                                          | 27 (3.1)                                                                          | 31 (3.5)                                                                          | 31 (3.5)                                                                            | 31 (3.5)                                                                            |
|                                   | #14-10                                                                            | #14-10                                                                            | #14-6                                                                             | #14-6                                                                               | #14-6                                                                               |
|                                   | 27 (3.1)                                                                          | 27 (3.1)                                                                          | 31 (3.5)                                                                          | 31 (3.5)                                                                            | 31 (3.5)                                                                            |
| <b>Mechanical Characteristics</b> |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Endurances/Cycles                 | 10,000                                                                            | 10,000                                                                            | 10,000                                                                            | 10,000                                                                              | 10,000                                                                              |
| <b>Physical Characteristics</b>   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Dimensions                        |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| See drawings on product pages     |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Weight - Lbs (KG)                 |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| 2-Pole                            | —                                                                                 | —                                                                                 | 3.0 (1.3)                                                                         | 3.1 (1.4)                                                                           | 4.0 (1.8)                                                                           |
| 3-Pole                            | 1.3 (0.6)                                                                         | 1.4 (0.6)                                                                         | 3.8 (1.7)                                                                         | 4.1 (1.8)                                                                           | 5.3 (2.4)                                                                           |
| 3-Pole + Neutral                  | 1.4 (0.6)                                                                         | 1.5 (0.7)                                                                         | —                                                                                 | —                                                                                   | —                                                                                   |
| 4-Pole                            | —                                                                                 | —                                                                                 | 4.7 (2.1)                                                                         | 4.8 (2.2)                                                                           | X.X (2.9)                                                                           |
| <b>Environmental</b>              |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Operating Temp. Range             | -20°C to 70°C                                                                     | -20°C to 70°C                                                                     | -20°C to 70°C                                                                     | -20°C to 70°C                                                                       | -20°C to 70°C                                                                       |
| Flammability Rating               | UL 94-V0                                                                          | UL 94-V0                                                                          | UL 94-V0                                                                          | UL 94-V0                                                                            | UL 94-V0                                                                            |
| <b>Accessories</b>                |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Lug Kit                           | Integral                                                                          | Integral                                                                          | Integral                                                                          | Integral                                                                            | Integral                                                                            |
| Handles                           |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Direct                            | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| Front Selector                    | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| Front Pistol                      | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| Side Pistol                       | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| Flange                            |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Cable                             | —                                                                                 | —                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| Shaft                             | —                                                                                 | —                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| NFPA Through Door Handle          | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| Shafts c/s - mm                   | 5x5                                                                               | 5x5                                                                               | 10x10                                                                             | 10x10                                                                               | 10x10                                                                               |
| Terminal Shrouds                  | Not Required                                                                      | Not Required                                                                      | Not Required                                                                      | Not Required                                                                        | Not Required                                                                        |
| Auxiliary Contacts                |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| (1) NO                            | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| (1) NC                            | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                   | •                                                                                   |
| AC Ratings                        |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |
| Volts                             | 600                                                                               | 600                                                                               | 600                                                                               | 600                                                                                 | 600                                                                                 |
| Amps                              | 10                                                                                | 10                                                                                | 10                                                                                | 10                                                                                  | 10                                                                                  |

Disconnect  
Switches

• Available, see product page for details and part numbers.

— Not available.

\* General purpose only, not photovoltaic rated.

## UL 98 Fused Rotary Disconnect Switches—30A


## Compact Class CC &amp; Class J

For a Complete Assembly, Please Select:

Select for Standard Applications

HANDLE

SWITCH



Switch

| Amp Rating | Fuse Class | Number of Poles | SCCR  | Max Horsepower Rating, 3-Ph |            |         | Wire Size      | Wire Type | Part Number    |
|------------|------------|-----------------|-------|-----------------------------|------------|---------|----------------|-----------|----------------|
|            |            |                 |       | 220/240Vac                  | 440/480Vac | 600 Vac |                |           |                |
| 30         | CC         | 3               | 100kA | 7.5                         | 15         | 20      | #14-10 Sol/Str | 75°C Cu   | RDF30CC-3      |
| 30         | CC         | 3 + Ntrl*       | 100kA | 7.5                         | 15         | 20      | #14-10 Sol/Str | 75°C Cu   | RDF30CC-3N     |
| 30         | J          | 3               | 100kA | 7.5                         | 15         | 20      | #14-10 Sol/Str | 75°C Cu   | RDF30J-3-COMP  |
| 30         | J          | 3 + Ntrl*       | 100kA | 7.5                         | 15         | 20      | #14-10 Sol/Str | 75°C Cu   | RDF30J-3N-COMP |

\* Neutral is switched.

+



Direct Mount Handle - mounts directly to switch, no shaft required

| For Switch Part Number | Color | Test Function | Padlockable | Part Number |
|------------------------|-------|---------------|-------------|-------------|
| RDF30CC-__             | Black | Y             | Y           | DIR-05      |
| RDF30J-_-COMP          | Black | Y             | Y           | DIR-06      |

OR



+



External Front Operated Selector Handle - shaft required

| NEMA Type        | Color      | Test Function | Padlockable | Defeatable | Part Number |
|------------------|------------|---------------|-------------|------------|-------------|
| 1, 3R, 4, 4X, 12 | Black      | N             | Y           | Y          | H4X-04B     |
| 1, 3R, 4, 4X, 12 | Red/Yellow | N             | Y           | Y          | H4X-04R     |

Shafts for Selector Handles

| Length in (mm) | Mounting Depth (X) in (mm) | Part Number |
|----------------|----------------------------|-------------|
| 7.9 (200)      | 4.02~9.65 (102~245)        | SH1-200     |
| 12.6 (320)     | 4.02~14.37 (102~365)       | SH1-320     |
| 15.7 (400)     | 4.02~17.52 (102~445)       | SH1-400     |



OR



OR



+



External Front Operated Pistol Handles - shaft required

| NEMA Type        | Color      | Test Function | Padlockable | Defeatable | Part Number |
|------------------|------------|---------------|-------------|------------|-------------|
| 1, 3R, 12        | Black      | N             | Y           | Y          | H12-05B     |
| 1, 3R, 12        | Red/Yellow | N             | Y           | Y          | H12-05R     |
| 1, 3R, 4, 4X, 12 | Black      | N             | Y           | Y          | H4X-05B     |
| 1, 3R, 4, 4X, 12 | Red/Yellow | N             | Y           | Y          | H4X-05R     |
| 1, 3R, 4, 4X, 12 | Black      | Y             | Y           | Y          | H4X-05TB    |
| 1, 3R, 4, 4X, 12 | Red/Yellow | Y             | Y           | Y          | H4X-05TR    |

Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required


| NEMA Type        | Color      | Test Function | Padlockable | Defeatable | Part Number |
|------------------|------------|---------------|-------------|------------|-------------|
| 1, 3R, 4, 4X, 12 | Black      | N             | Y           | Y          | H4X-05BHD   |
| 1, 3R, 4, 4X, 12 | Red/Yellow | N             | Y           | Y          | H4X-05RHD   |

Shafts for Pistol Handles

| Length in (mm) | Mounting Depth (X) in (mm) | Part Number |
|----------------|----------------------------|-------------|
| 7.9 (200)      | 4.02~9.65 (102~245)        | SH2-200     |
| 12.6 (320)     | 4.02~14.37 (102~365)       | SH2-320     |
| 15.7 (400)     | 4.02~17.52 (102~445)       | SH2-400     |



OR



NFPA Through the Door Handle Kit - to be used with selector handle or front pistol handle

| Color | Test Function | Padlockable | Defeatable | Part Number |
|-------|---------------|-------------|------------|-------------|
| Red   | N             | Y           | N          | H79-1       |

and...

Accessories

AUXILIARY CONTACTS



Auxiliary Contacts


| Contact Type             | Number of Contacts | Continuous Amp Rating | Voltage Rating | Maximum Number of Auxiliary Contacts per Disconnect Switch Part Number | Part Number                |
|--------------------------|--------------------|-----------------------|----------------|------------------------------------------------------------------------|----------------------------|
| NO                       | 1                  | 10A                   | 600Vac         | RDF30CC-_: 4 / 8 with BAC-HOLDER2                                      | BAC05 <sup>(1)</sup>       |
| NC                       | 1                  | 10A                   | 600Vac         | RDF30J-_-COMP: 2 / 6 with BAC-HOLDER2                                  | BAC06 <sup>(1)</sup>       |
| Auxiliary Contact Holder |                    |                       |                | Accepts 4 Auxiliary Contacts:<br>BAC05 or BAC06                        | BAC-HOLDER2 <sup>(2)</sup> |



# UL 98 Fused Rotary Disconnect Switches—30A

## Standard Class J

For a Complete Assembly, Please Select:

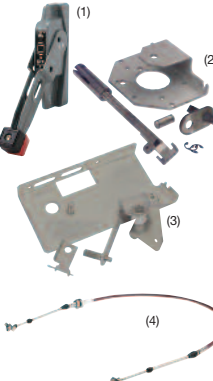
|                                                                                                                                                                                 |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|---------------|---------------|-----------------------|-------------|--------------------|-------------|-------------------------|-------------|-------------------------|-----------|-------------|
| SWITCH                                                                                                                                                                          |                                 | <b>Switch</b>                                                                                                                                                                  |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 |                                                                                                                  | Amp Rating                                                                                                                                                                     | Fuse Class                                                     | No. of Poles  | SCCR          | Max Horsepower Rating |             |                    |             |                         |             | Wire Size               | Wire Type | Part Number |
|                                                                                                                                                                                 |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               | 1-Phase 220/240Vac    | 220/240Vac  | 3-Phase 440/480Vac | 600 Vac     | 125 Vdc                 | 250 Vdc     |                         |           |             |
|                                                                                                                                                                                 |                                                                                                                  | 30                                                                                                                                                                             | J                                                              | 2             | 200kA         | 3                     | -           | -                  | -           | 3                       | 5           | #14-10 Sol<br>#14-6 Str | 75°C Cu   | RDF30J-2    |
| 30                                                                                                                                                                              | J                                                                                                                | 3                                                                                                                                                                              | 200kA                                                          | -             | 7.5           | 15                    | 20          | 3                  | 5           | #14-10 Sol<br>#14-6 Str | 75°C Cu     | RDF30J-3                |           |             |
| 30                                                                                                                                                                              | J                                                                                                                | 4                                                                                                                                                                              | 200kA                                                          | -             | 7.5           | 15                    | 20          | 3                  | 5           | #14-10 Sol<br>#14-6 Str | 75°C Cu     | RDF30J-4                |           |             |
| * DC Ratings use two poles in series.                                                                                                                                           |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
| +                                                                                                                                                                               |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
| HANDLE<br>Select for Standard Applications                                                                                                                                      |                                 | <b>Direct Mount Handle</b> - mounts directly to switch, no shaft required                                                                                                      |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 |                                                                                                                  | For Switch                                                                                                                                                                     |                                                                | Color         |               | Test Function         |             | Padlockable        |             |                         |             | Part Number             |           |             |
|                                                                                                                                                                                 |                                                                                                                  | Part Number                                                                                                                                                                    |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 |                                                                                                                  | All Switches                                                                                                                                                                   |                                                                | Black         |               | Y                     |             | Y - On Switch      |             |                         |             | DIR-07                  |           |             |
|                                                                                                                                                                                 |                                                                                                                  | or                                                                                                                                                                             |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 |                                                                                                                  | <br>or<br> | <b>External Front Operated Pistol Handles</b> - shaft required |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 |                                                                                                                  |                                                                                                                                                                                | NEMA Type                                                      | Color         |               | Test Function         |             | Padlockable        |             | Defeatable              |             | Part Number             |           |             |
|                                                                                                                                                                                 |                                                                                                                  |                                                                                                                                                                                | 1, 3R, 12                                                      | Black         |               | N                     |             | Y                  |             | Y                       |             | H12-05B                 |           |             |
|                                                                                                                                                                                 |                                                                                                                  |                                                                                                                                                                                | 1, 3R, 12                                                      | Red/Yellow    |               | N                     |             | Y                  |             | Y                       |             | H12-05R                 |           |             |
|                                                                                                                                                                                 |                                                                                                                  |                                                                                                                                                                                | 1, 3R, 4, 4X, 12                                               | Black         |               | N                     |             | Y                  |             | Y                       |             | H4X-05B                 |           |             |
| 1, 3R, 4, 4X, 12                                                                                                                                                                | Red/Yellow                                                                                                       |                                                                                                                                                                                | N                                                              |               | Y             |                       | Y           |                    | H4X-05R     |                         |             |                         |           |             |
| 1, 3R, 4, 4X, 12                                                                                                                                                                | Black                                                                                                            |                                                                                                                                                                                | Y                                                              |               | Y             |                       | Y           |                    | H4X-05TB    |                         |             |                         |           |             |
| 1, 3R, 4, 4X, 12                                                                                                                                                                | Red/Yellow                                                                                                       |                                                                                                                                                                                | Y                                                              |               | Y             |                       | Y           |                    | H4X-05TR    |                         |             |                         |           |             |
| <b>Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles</b> - shaft required                                                                                       |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
| NEMA Type                                                                                                                                                                       | Color                                                                                                            |                                                                                                                                                                                | Test Function                                                  |               | Padlockable   |                       | Defeatable  |                    | Part Number |                         |             |                         |           |             |
| 1, 3R, 4, 4X, 12                                                                                                                                                                | Black                                                                                                            |                                                                                                                                                                                | N                                                              |               | Y             |                       | Y           |                    | H4X-05BHD   |                         |             |                         |           |             |
| 1, 3R, 4, 4X, 12                                                                                                                                                                | Red/Yellow                                                                                                       |                                                                                                                                                                                | N                                                              |               | Y             |                       | Y           |                    | H4X-05RHD   |                         |             |                         |           |             |
| <br>+<br> | <b>External Right Side Operated Pistol Handles</b> - shaft required                                              |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 | NEMA Type                                                                                                        | Color                                                                                                                                                                          |                                                                | Test Function |               | Padlockable           |             | Defeatable         |             | Part Number             |             |                         |           |             |
|                                                                                                                                                                                 | 1, 3R, 4, 4X, 12                                                                                                 | Black                                                                                                                                                                          |                                                                | N             |               | Y                     |             | N/A                |             | H4X-05SB                |             |                         |           |             |
|                                                                                                                                                                                 | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow                                                                                                                                                                     |                                                                | N             |               | Y                     |             | N/A                |             | H4X-05SR                |             |                         |           |             |
|                                                                                                                                                                                 | <b>Shafts for Pistol Handles</b>                                                                                 |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 | Length in (mm)                                                                                                   | Mounting Depth (X) in (mm)                                                                                                                                                     |                                                                |               |               |                       |             |                    |             | Part Number             |             |                         |           |             |
|                                                                                                                                                                                 | 7.9 (200)                                                                                                        | 5.30~9.06 (135~230)                                                                                                                                                            |                                                                |               |               |                       |             |                    |             | SH5-200                 |             |                         |           |             |
|                                                                                                                                                                                 | 12.6 (320)                                                                                                       | 5.30~13.78 (135~350)                                                                                                                                                           |                                                                |               |               |                       |             |                    |             | SH5-320                 |             |                         |           |             |
|                                                                                                                                                                                 | 15.7 (400)                                                                                                       | 5.30~16.93 (135~430)                                                                                                                                                           |                                                                |               |               |                       |             |                    |             | SH5-400                 |             |                         |           |             |
|                                                                                                                                                                                 | or                                                                                                               |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                              | <b>Flange Handle<sup>(1)</sup></b> - requires shaft operated mechanism or cable operated mechanism + cable       |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 | NEMA Type                                                                                                        | Flange Style                                                                                                                                                                   |                                                                | Test Function |               | Padlockable           |             | Defeatable         |             | Part Number             |             |                         |           |             |
|                                                                                                                                                                                 | 1, 3R, 4, 12                                                                                                     | Standard                                                                                                                                                                       |                                                                | N             |               | Y                     |             | Y                  |             | FLH1                    |             |                         |           |             |
|                                                                                                                                                                                 | 1, 3R, 4, 4X, 12                                                                                                 | Chrome Plated                                                                                                                                                                  |                                                                | N             |               | Y                     |             | Y                  |             | FLH2                    |             |                         |           |             |
|                                                                                                                                                                                 | <b>Shaft Operated Flange Mechanism<sup>(2)</sup></b> - includes shaft                                            |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 | For Enclosure Depth - in (mm)                                                                                    |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         | Part Number |                         |           |             |
|                                                                                                                                                                                 | 6~24 (152~613)                                                                                                   |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         | FLRM        |                         |           |             |
|                                                                                                                                                                                 | <b>Cable Operated Flange Mechanism and Cable</b> - must select Mechanism <sup>(3)</sup> and Cable <sup>(4)</sup> |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 | Item / Length                                                                                                    |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         | Part Number |                         |           |             |
|                                                                                                                                                                                 | Cable Mechanism                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         | FLCM        |                         |           |             |
| 36" (900mm) Cable                                                                                                                                                               |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             | FLC36                   |             |                         |           |             |
| 60" (1500mm) Cable                                                                                                                                                              |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             | FLC60                   |             |                         |           |             |
| 120" (3000mm) Cable                                                                                                                                                             |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             | FLC120                  |             |                         |           |             |
| or                                                                                                                                                                              |                                                                                                                  |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                              | <b>NFPA Through the Door Handle Kit</b> - to be used with selector handle or front pistol handle                 |                                                                                                                                                                                |                                                                |               |               |                       |             |                    |             |                         |             |                         |           |             |
|                                                                                                                                                                                 | Color                                                                                                            |                                                                                                                                                                                |                                                                |               | Test Function |                       | Padlockable |                    | Defeatable  |                         | Part Number |                         |           |             |
|                                                                                                                                                                                 | Red                                                                                                              |                                                                                                                                                                                |                                                                |               | N             |                       | Y           |                    | N           |                         | H79-2       |                         |           |             |

# UL 98 Fused Rotary Disconnect Switches—30A


## Standard Class J

| and ...              |                                                                                   |                    |                    |                       |                |                                       |
|----------------------|-----------------------------------------------------------------------------------|--------------------|--------------------|-----------------------|----------------|---------------------------------------|
| Acc.<br>AUX CONTACTS |  | Auxiliary Contacts |                    |                       |                |                                       |
|                      |                                                                                   | Contact Type       | Number of Contacts | Continuous Amp Rating | Voltage Rating | Max Number of Aux Contacts per Switch |
|                      |                                                                                   | NO                 | 1                  | 10A                   | 600Vac         | 4                                     |
|                      |                                                                                   | NC                 | 1                  | 10A                   | 600Vac         | 4                                     |
|                      |                                                                                   |                    |                    |                       |                | Part Number                           |
|                      |                                                                                   |                    |                    |                       |                | BAC05                                 |
|                      |                                                                                   |                    |                    |                       |                | BAC06                                 |

### Dimensions – in (mm)

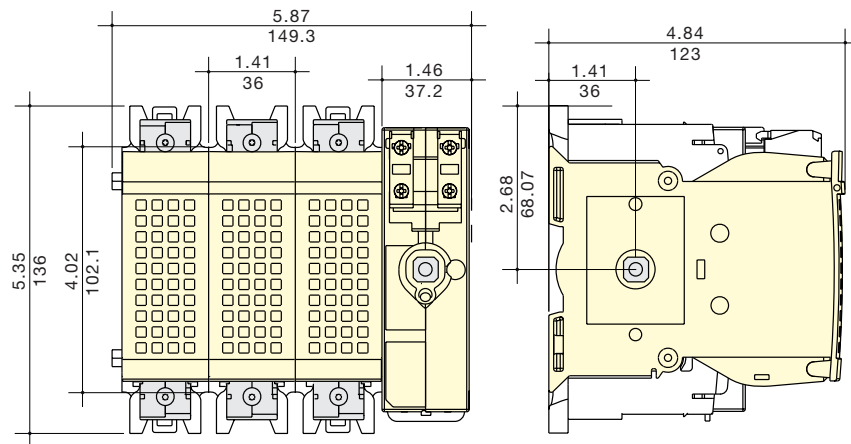


### Direct Mount Handle



DIR-07

### Flange Handle

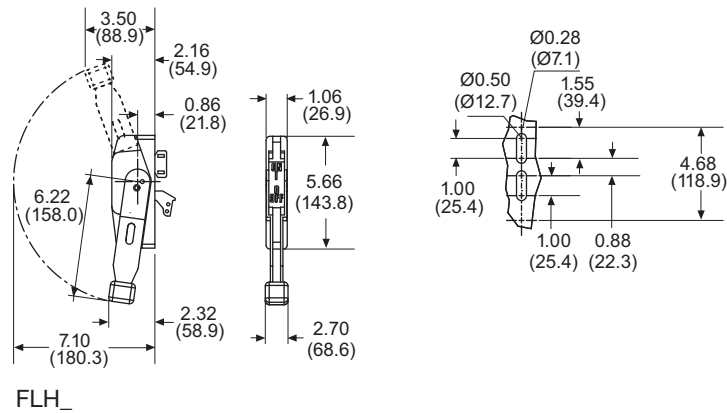

FLH\_


### External Front & Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation

Door Drilling Layout



H4X-05  
H12-05






# UL 98 Fused Rotary Disconnect Switches—60A

## Compact Class J

For a Complete Assembly, Please Select:

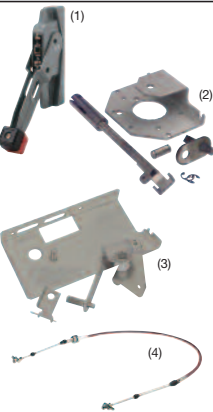
| SWITCH                                                                                                                                                                                                                                                                      | Switch                                                                                                           |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|---------------|-----------------|---------------|-----------------------|---------------|------------|------------|----------|-------------|-------------------------|-----------|---------------|
|                                                                                                                                                                                                                                                                             | Amp Rating                                                                                                       | Fuse Class    | Number of Poles | SCCR          | Max Horsepower Rating |               |            |            |          |             | Wire Size               | Wire Type | Part Number   |
|                                                                                                                                                                                                                                                                             |                                                                                                                  |               |                 |               | 1-Phase               | 3-Phase       |            | DC*        |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             |                                                                                                                  |               |                 |               | 220/240Vac            | 220/240Vac    | 440/480Vac | 600 Vac    | 125 Vdc  | 250 Vdc     |                         |           |               |
|                                                                                                                                                                                            | 60                                                                                                               | J             | 2               | 100kA         | 10                    | -             | -          | -          | 5        | 10          | #14-10 Sol<br>#14-6 Str | 75°C Cu   | RDF60J-2-COMP |
|                                                                                                                                                                                                                                                                             | 60                                                                                                               | J             | 3               | 100kA         | -                     | 15            | 30         | 50         | 5        | 10          | #14-10 Sol<br>#14-6 Str | 75°C Cu   | RDF60J-3-COMP |
|                                                                                                                                                                                                                                                                             | 60                                                                                                               | J             | 4               | 100kA         | -                     | 15            | 30         | 50         | 5        | 10          | #14-10 Sol<br>#14-6 Str | 75°C Cu   | RDF60J-4-COMP |
| * DC Ratings use two poles in series.                                                                                                                                                                                                                                       |                                                                                                                  |               |                 |               |                       |               |            |            |          |             |                         |           |               |
| +                                                                                                                                                                                                                                                                           |                                                                                                                  |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                            | <b>Direct Mount Handle</b> - mounts directly to switch, no shaft required                                        |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | For Switch Part Number                                                                                           | Color         |                 | Test Function |                       | Padlockable   |            |            |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | All Switches                                                                                                     | Black         |                 | Y             |                       | Y - On Switch |            |            |          | DIR-07      |                         |           |               |
| or                                                                                                                                                                                                                                                                          |                                                                                                                  |               |                 |               |                       |               |            |            |          |             |                         |           |               |
| <br>or<br><br>+<br> | <b>External Front Operated Pistol Handles</b> - shaft required                                                   |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | NEMA Type                                                                                                        | Color         |                 | Test Function |                       | Padlockable   |            | Defeatable |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 12                                                                                                        | Black         |                 | N             |                       | Y             |            | Y          |          | H12-05B     |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 12                                                                                                        | Red/Yellow    |                 | N             |                       | Y             |            | Y          |          | H12-05R     |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                 | N             |                       | Y             |            | Y          |          | H4X-05B     |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow    |                 | N             |                       | Y             |            | Y          |          | H4X-05R     |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                 | Y             |                       | Y             |            | Y          |          | H4X-05TB    |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow    |                 | Y             |                       | Y             |            | Y          |          | H4X-05TR    |                         |           |               |
|                                                                                                                                                                                                                                                                             | <b>Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles</b> - shaft required                        |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | NEMA Type                                                                                                        | Color         |                 | Test Function |                       | Padlockable   |            | Defeatable |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                 | N             |                       | Y             |            | Y          |          | H4X-05BHD   |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow    |                 | N             |                       | Y             |            | Y          |          | H4X-05RHD   |                         |           |               |
|                                                                                                                                                                                                                                                                             | <b>External Right Side Operated Pistol Handles</b> - shaft required                                              |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | NEMA Type                                                                                                        | Color         |                 | Test Function |                       | Padlockable   |            | Defeatable |          | Part Number |                         |           |               |
| 1, 3R, 4, 4X, 12                                                                                                                                                                                                                                                            | Black                                                                                                            |               | N               |               | Y                     |               | N/A        |            | H4X-05SB |             |                         |           |               |
| 1, 3R, 4, 4X, 12                                                                                                                                                                                                                                                            | Red/Yellow                                                                                                       |               | N               |               | Y                     |               | N/A        |            | H4X-05SR |             |                         |           |               |
| <b>Shafts for Pistol Handles</b>                                                                                                                                                                                                                                            |                                                                                                                  |               |                 |               |                       |               |            |            |          |             |                         |           |               |
| Length in (mm)                                                                                                                                                                                                                                                              | Mounting Depth (X) in (mm)                                                                                       |               |                 |               |                       |               |            |            |          |             | Part Number             |           |               |
| 7.9 (200)                                                                                                                                                                                                                                                                   | 5.30~9.06 (135~230)                                                                                              |               |                 |               |                       |               |            |            |          |             | SH5-200                 |           |               |
| 12.6 (320)                                                                                                                                                                                                                                                                  | 5.30~13.78 (135~350)                                                                                             |               |                 |               |                       |               |            |            |          |             | SH5-320                 |           |               |
| 15.7 (400)                                                                                                                                                                                                                                                                  | 5.30~16.93 (135~430)                                                                                             |               |                 |               |                       |               |            |            |          |             | SH5-400                 |           |               |
| or                                                                                                                                                                                                                                                                          |                                                                                                                  |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                          | <b>Flange Handle<sup>(1)</sup></b> - requires shaft operated mechanism or cable operated mechanism + cable       |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | NEMA Type                                                                                                        | Flange Style  |                 | Test Function |                       | Padlockable   |            | Defeatable |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 12                                                                                                     | Standard      |                 | N             |                       | Y             |            | Y          |          | FLH1        |                         |           |               |
|                                                                                                                                                                                                                                                                             | 1, 3R, 4, 4X, 12                                                                                                 | Chrome Plated |                 | N             |                       | Y             |            | Y          |          | FLH2        |                         |           |               |
|                                                                                                                                                                                                                                                                             | <b>Shaft Operated Flange Mechanism<sup>(2)</sup></b> - includes shaft                                            |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | For Enclosure Depth - in (mm)                                                                                    |               |                 |               |                       |               |            |            |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | 6-24 (152~613)                                                                                                   |               |                 |               |                       |               |            |            |          | FLRM        |                         |           |               |
|                                                                                                                                                                                                                                                                             | <b>Cable Operated Flange Mechanism and Cable</b> - must select Mechanism <sup>(3)</sup> and Cable <sup>(4)</sup> |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | Item / Length                                                                                                    |               |                 |               |                       |               |            |            |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | Cable Mechanism                                                                                                  |               |                 |               |                       |               |            |            |          | FLCM        |                         |           |               |
| 36" (900mm) Cable                                                                                                                                                                                                                                                           |                                                                                                                  |               |                 |               |                       |               |            |            | FLC36    |             |                         |           |               |
| 60" (1500mm) Cable                                                                                                                                                                                                                                                          |                                                                                                                  |               |                 |               |                       |               |            |            | FLC60    |             |                         |           |               |
| 120" (3000mm) Cable                                                                                                                                                                                                                                                         |                                                                                                                  |               |                 |               |                       |               |            |            | FLC120   |             |                         |           |               |
| or                                                                                                                                                                                                                                                                          |                                                                                                                  |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                          | <b>NFPA Through the Door Handle Kit</b> - to be used with selector handle or front pistol handle                 |               |                 |               |                       |               |            |            |          |             |                         |           |               |
|                                                                                                                                                                                                                                                                             | Color                                                                                                            |               |                 | Test Function |                       | Padlockable   |            | Defeatable |          | Part Number |                         |           |               |
|                                                                                                                                                                                                                                                                             | Red                                                                                                              |               |                 | N             |                       | Y             |            | N          |          | H79-2       |                         |           |               |



# UL 98 Fused Rotary Disconnect Switches—60A

## Standard Class J

For a Complete Assembly, Please Select:


| SWITCH                                                                                                                                                                                                                                                                     | Switch                                                                                                           |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|---------------|-----------------------|------------|------------|-------------|-------------|-------------|-------------------------|-----------|-------------|
|                                                                                                                                                                                                                                                                            | Amp Rating                                                                                                       | Fuse Class    | Number of Poles                                                                     | SCCR          | Max Horsepower Rating |            |            |             |             |             | Wire Size               | Wire Type | Part Number |
|                                                                                                                                                                                                                                                                            |                                                                                                                  |               |                                                                                     |               | 1-Phase 220/240Vac    | 3-Phase    |            |             | DC*         |             |                         |           |             |
|                                                                                                                                                                                                                                                                            |                                                                                                                  |               |                                                                                     |               |                       | 220/240Vac | 440/480Vac | 600 Vac     | 125 Vdc     | 250 Vdc     |                         |           |             |
|                                                                                                                                                                                           | 60                                                                                                               | J             | 2                                                                                   | 200kA         | 10                    | -          | -          | -           | 5           | 10          | #12-10 Sol<br>#12-1 Str | 75°C Cu   | RDF60J-2    |
|                                                                                                                                                                                                                                                                            | 60                                                                                                               | J             | 3                                                                                   | 200kA         | -                     | 15         | 30         | 50          | 5           | 10          | #12-10 Sol<br>#12-1 Str | 75°C Cu   | RDF60J-3    |
|                                                                                                                                                                                                                                                                            | 60                                                                                                               | J             | 4                                                                                   | 200kA         | -                     | 15         | 30         | 50          | 5           | 10          | #12-10 Sol<br>#12-1 Str | 75°C Cu   | RDF60J-4    |
| * DC Ratings use two poles in series.                                                                                                                                                                                                                                      |                                                                                                                  |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
| +                                                                                                                                                                                                                                                                          |                                                                                                                  |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                           | <b>Direct Mount Handle</b> - mounts directly to switch, no shaft required                                        |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | For Switch Part Number                                                                                           | Color         |                                                                                     | Test Function | Padlockable           |            |            |             |             | Part Number |                         |           |             |
|                                                                                                                                                                                                                                                                            | All Switches                                                                                                     | Black         |                                                                                     | Y             | Y                     |            |            |             |             | DIR-07      |                         |           |             |
| OR                                                                                                                                                                                                                                                                         |                                                                                                                  |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
| <br>or<br><br>+<br> | <b>External Front Operated Pistol Handles</b> - shaft required                                                   |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | NEMA Type                                                                                                        | Color         |                                                                                     | Test Function | Padlockable           |            | Defeatable |             | Part Number |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 12                                                                                                        | Black         |                                                                                     | N             | Y                     |            | Y          |             | H12-03B     |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 12                                                                                                        | Red/Yellow    |                                                                                     | N             | Y                     |            | Y          |             | H12-03R     |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                                                                                     | N             | Y                     |            | Y          |             | H4X-06B     |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow    |                                                                                     | N             | Y                     |            | Y          |             | H4X-06R     |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                                                                                     | Y             | Y                     |            | Y          |             | H4X-06TB    |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow    |                                                                                     | Y             | Y                     |            | Y          |             | H4X-06TR    |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | <b>Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles</b> - shaft required                        |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | NEMA Type                                                                                                        | Color         |                                                                                     | Test Function | Padlockable           |            | Defeatable |             | Part Number |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                                                                                     | N             | Y                     |            | Y          |             | H4X-06BHD   |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Red/Yellow    |                                                                                     | N             | Y                     |            | Y          |             | H4X-06RHD   |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | <b>External Right Side Operated Pistol Handles</b> - shaft required                                              |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | NEMA Type                                                                                                        | Color         |                                                                                     | Test Function | Padlockable           |            | Defeatable |             | Part Number |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Black         |                                                                                     | N             | Y                     |            | N/A        |             | H4X-06SB    |             |                         |           |             |
| 1, 3R, 4, 4X, 12                                                                                                                                                                                                                                                           | Red/Yellow                                                                                                       |               | N                                                                                   | Y             |                       | N/A        |            | H4X-06SR    |             |             |                         |           |             |
| <b>Shafts for Pistol Handles</b>                                                                                                                                                                                                                                           |                                                                                                                  |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
| Length in (mm)                                                                                                                                                                                                                                                             | Mounting Depth (X) in (mm)                                                                                       |               |                                                                                     |               |                       |            |            |             | Part Number |             |                         |           |             |
| 7.9 (200)                                                                                                                                                                                                                                                                  | 5.30~9.06 (135~230)                                                                                              |               |  |               |                       |            |            |             | SH5-200     |             |                         |           |             |
| 12.6 (320)                                                                                                                                                                                                                                                                 | 5.30~13.78 (135~350)                                                                                             |               |                                                                                     |               |                       |            |            |             | SH5-320     |             |                         |           |             |
| 15.7 (400)                                                                                                                                                                                                                                                                 | 5.30~16.93 (135~430)                                                                                             |               |                                                                                     |               |                       |            |            |             | SH5-400     |             |                         |           |             |
| OR                                                                                                                                                                                                                                                                         |                                                                                                                  |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
| <br><br>          | <b>Flange Handle<sup>(1)</sup></b> - requires shaft operated mechanism or cable operated mechanism + cable       |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | NEMA Type                                                                                                        | Flange Style  |                                                                                     | Test Function | Padlockable           |            | Defeatable |             | Part Number |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 12                                                                                                     | Standard      |                                                                                     | N             | Y                     |            | Y          |             | FLH1        |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 1, 3R, 4, 4X, 12                                                                                                 | Chrome Plated |                                                                                     | N             | Y                     |            | Y          |             | FLH2        |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | <b>Shaft Operated Flange Mechanism<sup>(2)</sup></b> - includes shaft                                            |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | For Enclosure Depth in (mm)                                                                                      |               |                                                                                     |               |                       |            |            | Part Number |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | 6~24 (152~613)                                                                                                   |               |                                                                                     |               |                       |            |            | FLRM        |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | <b>Cable Operated Flange Mechanism and Cable</b> - must select Mechanism <sup>(3)</sup> and Cable <sup>(4)</sup> |               |                                                                                     |               |                       |            |            |             |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | Item / Length                                                                                                    |               |                                                                                     |               |                       |            |            | Part Number |             |             |                         |           |             |
|                                                                                                                                                                                                                                                                            | Cable Mechanism                                                                                                  |               |                                                                                     |               |                       |            |            | FLCM        |             |             |                         |           |             |
| 36" (900mm) Cable                                                                                                                                                                                                                                                          |                                                                                                                  |               |                                                                                     |               |                       |            | FLC36      |             |             |             |                         |           |             |
| 60" (1500mm) Cable                                                                                                                                                                                                                                                         |                                                                                                                  |               |                                                                                     |               |                       |            | FLC60      |             |             |             |                         |           |             |
| 120" (3000mm) Cable                                                                                                                                                                                                                                                        |                                                                                                                  |               |                                                                                     |               |                       |            | FLC120     |             |             |             |                         |           |             |

# UL 98 Fused Rotary Disconnect Switches—60A


## Standard Class J

| Select | NFPA HANDLE   | or                                                                     |                    |                       |                |             |
|--------|---------------|------------------------------------------------------------------------|--------------------|-----------------------|----------------|-------------|
|        |               | NFPA Through the Door Handle Kit - to be used with front pistol handle |                    |                       |                |             |
| Acc.   | AUX. CONTACTS | and ...                                                                |                    |                       |                |             |
|        |               | Auxiliary Contacts                                                     |                    |                       |                |             |
|        |               | Contact Type                                                           | Number of Contacts | Continuous Amp Rating | Voltage Rating | Part Number |
|        |               | NO                                                                     | 1                  | 10A                   | 600Vac         | BAC05       |
|        |               | NC                                                                     | 1                  | 10A                   | 600Vac         | BAC06       |

Dimensions – in (mm)

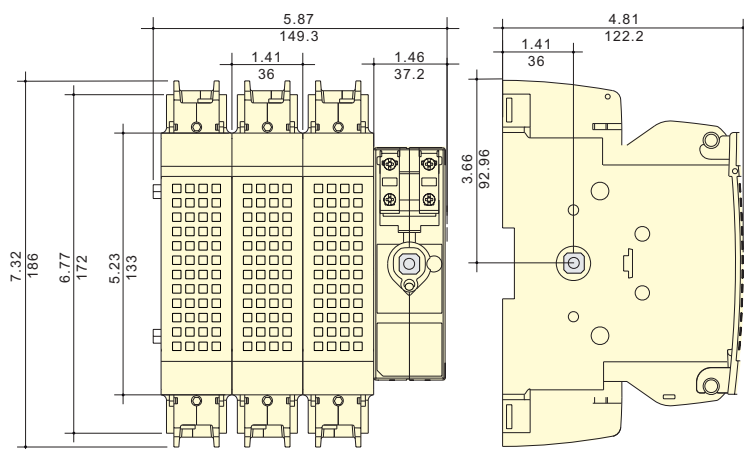


Direct Mount Handle



DIR-07

Flange Handle

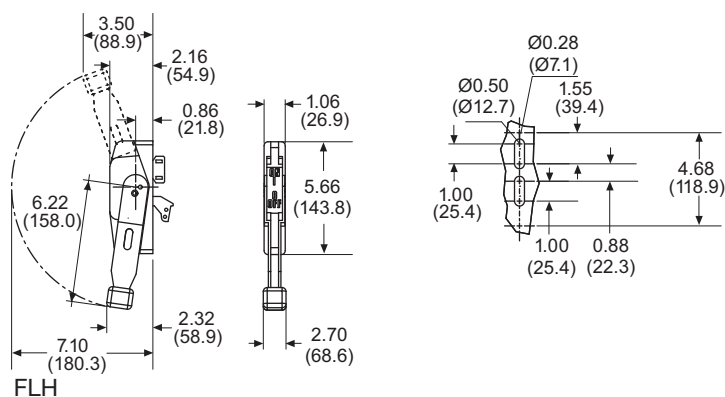

FLH\_


External Front and Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation

Door Drilling Layout





H4X-06  
H12-03



# UL 98 Fused Rotary Disconnect Switches—100A

## Standard Class J

For a Complete Assembly, Please Select:


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------|---------------|-----------------------|--------------------|------------|-------------|-------------|-------------|-------------------------|-------------|-------------|--|--|
| SWITCH                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          | Switch                                                                            |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           | Amp Rating                                                                        | Fuse Class                                                         | Number of Poles | SCCR          | Max Horsepower Rating |                    |            |             |             |             | Wire Size               | Wire Type   | Part Number |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           |                                                                                   |                                                                    |                 |               | 1-Phase 220/240Vac    | 3-Phase 220/240Vac | 440/480Vac | 600 Vac     | DC* 125 Vdc | 250 Vdc     |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           | 100                                                                               | J                                                                  | 2               | 200kA         | 10                    | -                  | -          | -           | 7.5         | 20          | #12-10 Sol<br>#12-1 Str | 75°C Cu     | RDF100J-2   |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           | 100                                                                               | J                                                                  | 3               | 200kA         | -                     | 30                 | 60         | 75          | 7.5         | 20          | #12-10 Sol<br>#12-1 Str | 75°C Cu     | RDF100J-3   |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           | 100                                                                               | J                                                                  | 4               | 200kA         | -                     | 30                 | 60         | 75          | 7.5         | 20          | #12-10 Sol<br>#12-1 Str | 75°C Cu     | RDF100J-4   |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           | * DC Ratings use two poles in series.                                             |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           | +                                                                                 |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           |  | Direct Mount Handle - mounts directly to switch, no shaft required |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           |                                                                                   | For Switch Part Number                                             |                 | Color         |                       | Test Function      |            | Padlockable |             |             |                         | Part Number |             |  |  |
| All Switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                           |                                                                                   | Black                                                              |                 | Y             |                       | Y                  |            |             |             | DIR-07      |                         |             |             |  |  |
| or                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
| <div>SELECT FOR STANDARD APPLICATIONS</div> <div>HANDLE</div> <div></div> <div>OR</div> <div></div> <div>+</div> <div></div> <div>+</div> <div></div> | External Front Operated Pistol Handles - shaft required                                                   |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | NEMA Type                                                                                                 |                                                                                   | Color                                                              |                 | Test Function |                       | Padlockable        |            | Defeatable  |             | Part Number |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 12                                                                                                 |                                                                                   | Black                                                              |                 | N             |                       | Y                  |            | Y           |             | H12-03B     |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 12                                                                                                 |                                                                                   | Red/Yellow                                                         |                 | N             |                       | Y                  |            | Y           |             | H12-03R     |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Black                                                              |                 | N             |                       | Y                  |            | Y           |             | H4X-06B     |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Red/Yellow                                                         |                 | N             |                       | Y                  |            | Y           |             | H4X-06R     |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Black                                                              |                 | Y             |                       | Y                  |            | Y           |             | H4X-06TB    |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Red/Yellow                                                         |                 | Y             |                       | Y                  |            | Y           |             | H4X-06TR    |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required                        |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | NEMA Type                                                                                                 |                                                                                   | Color                                                              |                 | Test Function |                       | Padlockable        |            | Defeatable  |             | Part Number |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Black                                                              |                 | N             |                       | Y                  |            | Y           |             | H4X-06BHD   |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Red/Yellow                                                         |                 | N             |                       | Y                  |            | Y           |             | H4X-06RHD   |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | External Right Side Operated Pistol Handles - shaft required                                              |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | NEMA Type                                                                                                 |                                                                                   | Color                                                              |                 | Test Function |                       | Padlockable        |            | Defeatable  |             | Part Number |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Black                                                              |                 | N             |                       | Y                  |            | N/A         |             | H4X-06SB    |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Red/Yellow                                                         |                 | N             |                       | Y                  |            | N/A         |             | H4X-06SR    |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Shafts for Pistol Handles                                                                                 |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Length in (mm)                                                                                            |                                                                                   | Mounting Depth (X) in (mm)                                         |                 |               |                       |                    |            |             |             |             |                         | Part Number |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 7.9 (200)                                                                                                 |                                                                                   | 5.30~9.06 (135~230)                                                |                 |               |                       |                    |            |             |             |             |                         | SH5-200     |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 12.6 (320)                                                                                                |                                                                                   | 5.30~13.78 (135~350)                                               |                 |               |                       |                    |            |             |             |             |                         | SH5-320     |             |  |  |
| 15.7 (400)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                           | 5.30~16.93 (135~430)                                                              |                                                                    |                 |               |                       |                    |            |             |             |             | SH5-400                 |             |             |  |  |
| or                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
| <div></div> <div>(1)</div> <div></div> <div>(2)</div> <div></div> <div>(3)</div> <div></div> <div>(4)</div>                                          | Flange Handle <sup>(1)</sup> - requires shaft operated mechanism or cable operated mechanism + cable      |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | NEMA Type                                                                                                 |                                                                                   | Flange Style                                                       |                 | Test Function |                       | Padlockable        |            | Defeatable  |             | Part Number |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 12                                                                                              |                                                                                   | Standard                                                           |                 | N             |                       | Y                  |            | Y           |             | FLH1        |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1, 3R, 4, 4X, 12                                                                                          |                                                                                   | Chrome Plated                                                      |                 | N             |                       | Y                  |            | Y           |             | FLH2        |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Shaft Operated Flange Mechanism <sup>(2)</sup> - includes shaft                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | For Enclosure Depth in (mm)                                                                               |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         | Part Number |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 6~24 (152~613)                                                                                            |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         | FLRM        |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Cable Operated Flange Mechanism and Cable - must select Mechanism <sup>(3)</sup> and Cable <sup>(4)</sup> |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         |             |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Item / Length                                                                                             |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         | Part Number |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Cable Mechanism                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             |                         | FLCM        |             |  |  |
| 36" (900mm) Cable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             | FLC36                   |             |             |  |  |
| 60" (1500mm) Cable                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             | FLC60                   |             |             |  |  |
| 120" (3000mm) Cable                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                           |                                                                                   |                                                                    |                 |               |                       |                    |            |             |             |             | FLC120                  |             |             |  |  |

# UL 98 Fused Rotary Disconnect Switches—100A


## Standard Class J

| Select  | NFPA HANDLE                                                                       | or                                                                     |                    |                       |                |                                       |             |
|---------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------|-----------------------|----------------|---------------------------------------|-------------|
|         |                                                                                   | NFPA Through the Door Handle Kit - to be used with front pistol handle |                    |                       |                |                                       |             |
|         |                                                                                   | Color                                                                  |                    | Test Function         | Padlockable    | Defeatable                            | Part Number |
|         |  | Red                                                                    |                    | N                     | Y              | N                                     | H79-2       |
| and ... |                                                                                   |                                                                        |                    |                       |                |                                       |             |
| Acc.    | AUX CONTACTS                                                                      | Auxiliary Contacts                                                     |                    |                       |                |                                       |             |
|         |                                                                                   | Contact Type                                                           | Number of Contacts | Continuous Amp Rating | Voltage Rating | Max Number of Aux Contacts per Switch | Part Number |
|         |                                                                                   | NO                                                                     | 1                  | 10A                   | 600Vac         | 4                                     | BAC05       |
|         |                                                                                   | NC                                                                     | 1                  | 10A                   | 600Vac         | 4                                     | BAC06       |

Dimensions – in (mm)

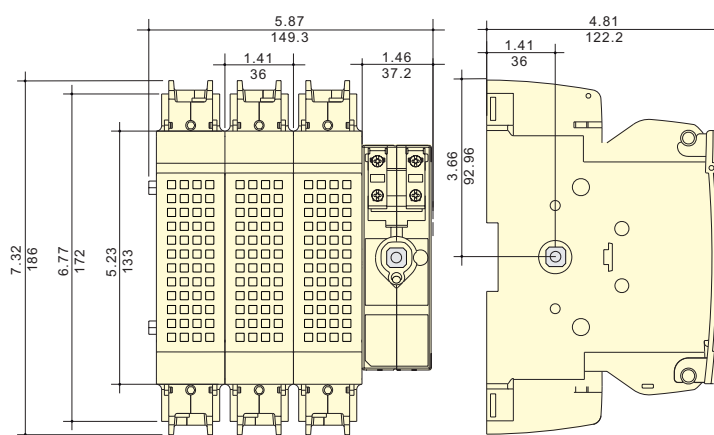


Direct Mount Handle



DIR-07

Flange Handle

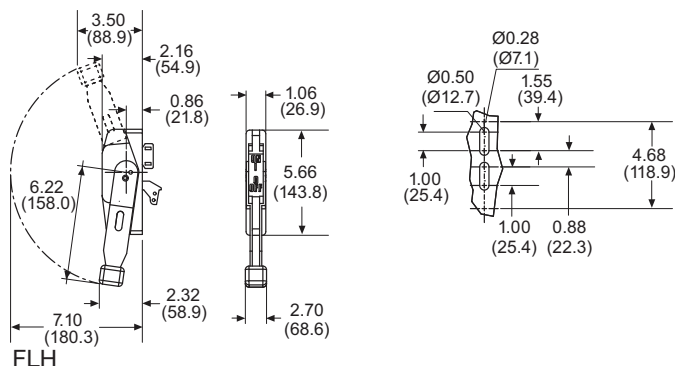

FLH\_


External Front & Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation

Door Drilling Layout



H4X-06  
H12-03







# UL 98 Fused Rotary Disconnect Switches—200 & 400A

## Standard Class J


For a Complete Assembly, Please Select:

|                                  |                                                                                     |                                                                                    |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|----------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------|-----------------|------------------------------|-------------------------------------------------------------------------------------|-------------|--------------------|---------|-------------|-------------|-------------|
| SWITCH + LUGS                    |    | Switch                                                                             |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | Amp Rating                                                                         | Fuse Class                                               | Number of Poles | SCCR                         | Max Horsepower Rating                                                               |             |                    |         | DC*         |             | Part Number |
|                                  |                                                                                     |                                                                                    |                                                          |                 |                              | 1-Phase 220/240Vac                                                                  | 220/240Vac  | 3-Phase 440/480Vac | 600 Vac | 125 Vdc     | 250 Vdc     |             |
|                                  |                                                                                     | 200                                                                                | J                                                        | 2               | 200kA                        | 10                                                                                  | -           | -                  | -       | -           | -           | RDF200J-2   |
|                                  |                                                                                     | 200                                                                                | J                                                        | 3               | 200kA                        | -                                                                                   | 60          | 125                | 150     | -           | -           | RDF200J-3   |
|                                  |                                                                                     | 200                                                                                | J                                                        | 4               | 200kA                        | -                                                                                   | 60          | 125                | 150     | -           | -           | RDF200J-4   |
|                                  |                                                                                     | 400                                                                                | J                                                        | 2               | 200kA                        | 10                                                                                  | -           | -                  | -       | 20          | 50          | RDF400J-2   |
|                                  |                                                                                     | 400                                                                                | J                                                        | 3               | 200kA                        | -                                                                                   | 125         | 250                | 350     | 20          | 50          | RDF400J-3   |
|                                  |                                                                                     | 400                                                                                | J                                                        | 4               | 200kA                        | -                                                                                   | 125         | 250                | 350     | 20          | 50          | RDF400J-4   |
|                                  |                                                                                     | * DC Ratings use two poles in series.                                              |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
| HANDLE                           |    | Terminal Lug Kit                                                                   |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | Switch Amp Rating                                                                  | Number of Poles                                          | Lugs Per Kit    | Wire Range                   |                                                                                     |             | Wire Type          |         | Part Number |             |             |
|                                  |                                                                                     | 200                                                                                | 2                                                        | 2               | #6-300MCM                    |                                                                                     |             | 75°C Cu/Al         |         | LUG1-2      |             |             |
|                                  |                                                                                     | 200                                                                                | 3                                                        | 3               | #6-300MCM                    |                                                                                     |             | 75°C Cu/Al         |         | LUG1-3      |             |             |
|                                  |                                                                                     | 200                                                                                | 4                                                        | 4               | #6-300MCM                    |                                                                                     |             | 75°C Cu/Al         |         | LUG1-4      |             |             |
|                                  |                                                                                     | 400                                                                                | 2                                                        | 2               | #4-600MCM or Dual 1/0-250MCM |                                                                                     |             | 75°C Cu/Al         |         | LUG2-2      |             |             |
|                                  |                                                                                     | 400                                                                                | 3                                                        | 3               | #4-600MCM or Dual 1/0-250MCM |                                                                                     |             | 75°C Cu/Al         |         | LUG2-3      |             |             |
|                                  |                                                                                     | 400                                                                                | 4                                                        | 4               | #4-600MCM or Dual 1/0-250MCM |                                                                                     |             | 75°C Cu/Al         |         | LUG2-4      |             |             |
| +                                |                                                                                     |                                                                                    |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
| SELECT FOR STANDARD APPLICATIONS |   | Direct Mount Handle - mounts directly to switch, no shaft required                 |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | For Switch Part Number                                                             | Color                                                    | Test Function   | Padlockable                  |                                                                                     |             |                    |         | Part Number |             |             |
|                                  |                                                                                     | All Switches                                                                       | Black                                                    | Y               | Y                            |                                                                                     |             |                    |         | DIR-07      |             |             |
| OR                               |                                                                                     |                                                                                    |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
| SELECT FOR STANDARD APPLICATIONS |  | External Front Operated Pistol Handles - shaft required                            |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | NEMA Type                                                                          | Color                                                    | Test Function   | Padlockable                  | Defeatable                                                                          | Part Number |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 12                                                                          | Black                                                    | N               | Y                            | Y                                                                                   | H12-03B     |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 12                                                                          | Red/Yellow                                               | N               | Y                            | Y                                                                                   | H12-03R     |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Black                                                    | N               | Y                            | Y                                                                                   | H4X-06B     |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Red/Yellow                                               | N               | Y                            | Y                                                                                   | H4X-06R     |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Black                                                    | Y               | Y                            | Y                                                                                   | H4X-06TB    |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Red/Yellow                                               | Y               | Y                            | Y                                                                                   | H4X-06TR    |                    |         |             |             |             |
|                                  |                                                                                     | Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | NEMA Type                                                                          | Color                                                    | Test Function   | Padlockable                  | Defeatable                                                                          | Part Number |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Black                                                    | N               | Y                            | Y                                                                                   | H4X-06BHD   |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Red/Yellow                                               | N               | Y                            | Y                                                                                   | H4X-06RHD   |                    |         |             |             |             |
|                                  |                                                                                     | External Right Side Operated Pistol Handles - shaft required                       |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | NEMA Type                                                                          | Color                                                    | Test Function   | Padlockable                  | Defeatable                                                                          | Part Number |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Black                                                    | N               | Y                            | N/A                                                                                 | H4X-06SB    |                    |         |             |             |             |
|                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                   | Red/Yellow                                               | N               | Y                            | N/A                                                                                 | H4X-06SR    |                    |         |             |             |             |
|                                  |                                                                                     | Shafts for Pistol Handles                                                          |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |
|                                  |                                                                                     | Length in (mm)                                                                     | Mounting Depth (X) in (mm)                               |                 |                              |                                                                                     |             |                    |         |             | Part Number |             |
|                                  |                                                                                     | 7.9 (200)                                                                          | 200A: 5.70-9.06 (145-230)<br>400A: 7.87-10.24 (200-260)  |                 |                              |  |             |                    |         |             | SH5-200     |             |
|                                  |                                                                                     | 12.6 (320)                                                                         | 200A: 5.70-13.78 (145-350)<br>400A: 7.87-16.93 (200-380) |                 |                              |                                                                                     |             |                    |         |             |             |             |
| 15.7 (400)                       | 200A: 5.70-16.93 (145-430)<br>400A: 7.87-18.10 (200-460)                            |                                                                                    |                                                          |                 |                              |                                                                                     |             |                    |         |             |             |             |




## UL 98 Fused Rotary Disconnect Switches—200 & 400A Standard Class J

### Direct Mount Handle




DIR-07

### Flange Handle

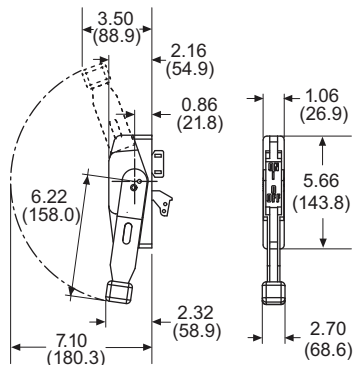

FLH\_




### External Front & Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation



Door Drilling Layout



H4X-06  
H12-03



### Terminal Lugs



200A

LUG1-\_\_



400A

LUG2-\_\_




Disconnect  
Switches

## Open & Enclosed Rotary Disconnect Switches In-Stock and Ship Within 24 Hours

The Bussmann QuikShip Everyday Service ensures the most common open and enclosed rotary disconnect switches ship within 24 hours to help you meet project timelines.

Contact your Bussmann representative for details.

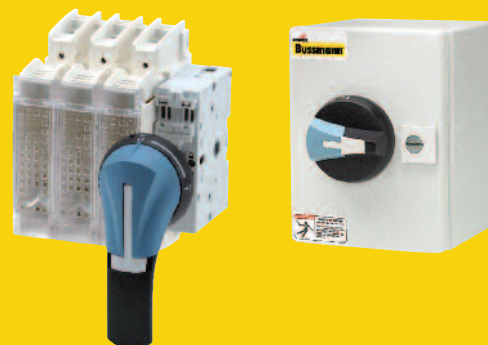




**QuikShip®**  
Everyday

[www.cooperbussmann.com/Disconnects](http://www.cooperbussmann.com/Disconnects)

**COOPER Bussmann**

## UL 98 Fused Rotary Disconnect Switches—600 & 800A Standard Class J & Class L

For a Complete Assembly, Please Select:

|                                  |               |                                                                                     |                                                                        |                                                                                   |                                                                                     |                                |                                       |             |             |
|----------------------------------|---------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-------------|-------------|
| Select for Standard Applications | SWITCH + LUGS |    | Switch                                                                 |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               | Amp Rating                                                                          | Fuse Class                                                             | Number of Poles                                                                   | SCCR                                                                                | Max Horsepower Rating, 3-Phase |                                       |             | Part Number |
|                                  |               |                                                                                     |                                                                        |                                                                                   |                                                                                     | 220/240Vac                     | 440/480Vac                            | 600Vac      |             |
|                                  |               | 600                                                                                 | J                                                                      | 2                                                                                 | 200kA                                                                               | -                              | -                                     | -           | RDF600J-2   |
|                                  |               | 600                                                                                 | J                                                                      | 3                                                                                 | 200kA                                                                               | 200                            | 400                                   | 500         | RDF600J-3   |
|                                  |               | 600                                                                                 | J                                                                      | 4                                                                                 | 200kA                                                                               | 200                            | 400                                   | 500         | RDF600J-4   |
|                                  |               | 800                                                                                 | L                                                                      | 2                                                                                 | 200kA                                                                               | -                              | -                                     | -           | RDF800L-2   |
|                                  |               | 800                                                                                 | L                                                                      | 3                                                                                 | 200kA                                                                               | 200                            | 500                                   | 500         | RDF800L-3   |
|                                  |               | 800                                                                                 | L                                                                      | 4                                                                                 | 200kA                                                                               | 200                            | 500                                   | 500         | RDF800L-4   |
|                                  |               |                                                                                     |                                                                        |  | Terminal Lug Kit                                                                    |                                |                                       |             |             |
|                                  |               |                                                                                     | Switch Amp Rating                                                      | Number of Poles                                                                   | Lugs Per Kit                                                                        | Wire Range                     | Wire Type                             | Part Number |             |
|                                  |               |                                                                                     | 600-800                                                                | 2                                                                                 | 2                                                                                   | (2) #2-600MCM                  | 75°C Cu/Al                            | LUG5-2      |             |
|                                  |               |                                                                                     | 600-800                                                                | 3                                                                                 | 3                                                                                   | (2) #2-600MCM                  | 75°C Cu/Al                            | LUG5-3      |             |
|                                  |               |                                                                                     | 600-800                                                                | 4                                                                                 | 4                                                                                   | (2) #2-600MCM                  | 75°C Cu/Al                            | LUG5-4      |             |
| Accessories                      | HANDLE        |    | Direct Mount Handle - mounts directly to switch, no shaft required     |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               | For Switch Part Number                                                              |                                                                        | Color                                                                             | Test Function                                                                       | Padlockable                    |                                       | Part Number |             |
|                                  |               | All Switches                                                                        |                                                                        | Black                                                                             | Y                                                                                   | Y                              |                                       | DIR-08      |             |
|                                  |               | or                                                                                  |                                                                        |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               |   | External Front Operated Pistol Handles - shaft required                |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               | NEMA Type                                                                           |                                                                        | Color                                                                             | Test Function                                                                       | Padlockable                    | Defeatable                            | Part Number |             |
|                                  |               | 1, 3R, 4, 4X, 12                                                                    |                                                                        | Black                                                                             | N                                                                                   | Y                              | Y                                     | H4X-07B     |             |
|                                  |               | 1, 3R, 4, 4X, 12                                                                    |                                                                        | Red/Yellow                                                                        | N                                                                                   | Y                              | Y                                     | H4X-07R     |             |
|                                  |               | Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required  |                                                                        |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               | NEMA Type                                                                           |                                                                        | Color                                                                             | Test Function                                                                       | Padlockable                    | Defeatable                            | Part Number |             |
| 1, 3R, 4, 4X, 12                 |               | Black                                                                               | N                                                                      | Y                                                                                 | Y                                                                                   | H4X-07BHD                      |                                       |             |             |
| 1, 3R, 4, 4X, 12                 |               | Red/Yellow                                                                          | N                                                                      | Y                                                                                 | Y                                                                                   | H4X-07RHD                      |                                       |             |             |
|                                  |               |  | Shafts for Pistol Handles                                              |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               |                                                                                     | Length in (mm)                                                         | Mounting Depth (X) in (mm)                                                        |                                                                                     |                                | Part Number                           |             |             |
|                                  |               |                                                                                     | 7.9 (200)                                                              | 10.63~11.97 (270~304)                                                             |  |                                | SH7-200                               |             |             |
|                                  |               |                                                                                     | 12.6 (320)                                                             | 10.63~16.69 (270~424)                                                             |                                                                                     |                                | SH7-320                               |             |             |
|                                  |               |                                                                                     | 15.7 (400)                                                             | 10.63~19.84 (270~504)                                                             |                                                                                     |                                | SH7-400                               |             |             |
|                                  |               |  | NFPA Through the Door Handle Kit - to be used with front pistol handle |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               |                                                                                     | For Switch Part Number                                                 | Color                                                                             | Test Function                                                                       | Padlockable                    | Defeatable                            | Part Number |             |
|                                  |               |                                                                                     | All Switches                                                           | Red                                                                               | N                                                                                   | Y                              | N                                     | H79-4       |             |
|                                  |               |  | Auxiliary Contacts                                                     |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               |                                                                                     | Contact Type                                                           | Number of Contacts                                                                | Continuous Amp Rating                                                               | Voltage Rating                 | Max Number of Aux Contacts per Switch | Part Number |             |
|                                  |               |                                                                                     | NO                                                                     | 1                                                                                 | 10A                                                                                 | 600Vac                         | 8                                     | BAC05       |             |
|                                  |               |                                                                                     | NC                                                                     | 1                                                                                 | 10A                                                                                 | 600Vac                         | 8                                     | BAC06       |             |
|                                  |               |  | Terminal Shrouds - includes terminal shroud for lineside or loadside   |                                                                                   |                                                                                     |                                |                                       |             |             |
|                                  |               |                                                                                     | Switch Amp Rating                                                      | Number of Poles                                                                   |                                                                                     |                                |                                       | Part Number |             |
|                                  |               |                                                                                     | 600-800                                                                | 2                                                                                 |                                                                                     |                                |                                       | TSH10-2TB   |             |
|                                  |               |                                                                                     | 600-800                                                                | 3                                                                                 |                                                                                     |                                |                                       | TSH10-3TB   |             |
|                                  |               |                                                                                     | 600-800                                                                | 4                                                                                 |                                                                                     |                                |                                       | TSH10-4TB   |             |





# UL 98 Fused Rotary Disconnect Switches—600 & 800A


## Standard Class J & Class L

### Dimensions – in (mm)

- RDF600J-3 • RDF800L-3

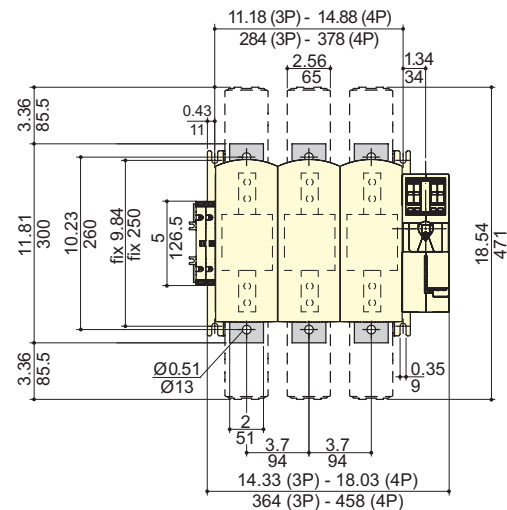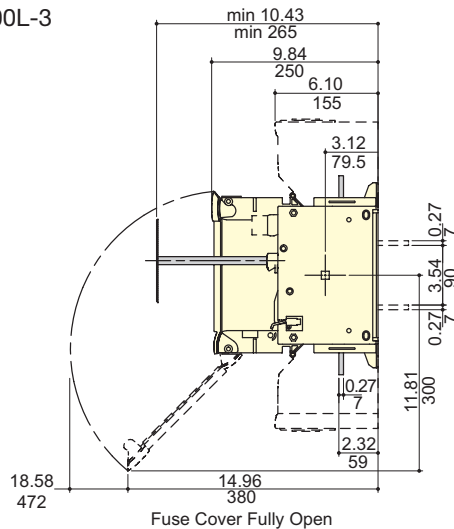


### Direct Mount Handle




### External Front Pistol Handle


#### Handle Type




#### Direction of Front Operation



#### Door Drilling Layout



### Terminal Lugs



600 to 800A

LUG5-\_\_

Disconnect  
Switches



# UL 98 Non-Fused Rotary Disconnect Switches—30 to 1200A

## Description

Bussmann UL 98 non-fused rotary disconnect switches are versatile switches that “break” and “make” power circuits ON and OFF load.

## Features

- Make and break power under load
- Up to 200kA SCCR
- DIN-Rail or panel mount (30-100A)
- Disconnect switches are front, right side and direct handle operable (30-100A)
- Finger-safe (30-100A)
- Fully visualized breaking (100-1200A)


## Agency Information

- UL98, Guide WHTY, File E155130
- CSA 22.2 No. 4, File 257020
- Conforms with IEC 60947-3

## Online Resources

Visit [www.cooperbussmann.com/Disconnects](http://www.cooperbussmann.com/Disconnects) for:

- CAD Drawings
- Instruction Sheets
- UL Information

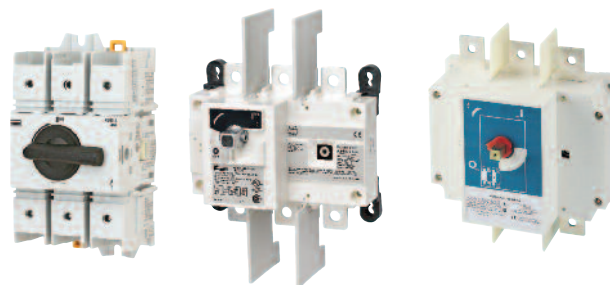

**QuikShip**   
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Bussmann representative for details.

## Related Cooper Bussmann Products

| Fuse Blocks                              | Data Sheet # |
|------------------------------------------|--------------|
| Modular Knifeblade Fuse Blocks 100-600A  | 3192         |
| Fuses Holders                            |              |
| CH Series Class CC, Midget & 10x38 0-30A | 3185         |
| Finger-Safe Optima Series 0-30A          | 1102         |
| Optima™ Protection Modules 0-30A         | 1109         |
| CH Series Class J 0-60A                  | 2144         |

## IEC Electrical Specifications



RD30-3



RD200-3



RD600-3

| Part Number                                                        | RD30-3           | RD60-3           | RD100-3          | RD100-3-SCCR | RD200-3 | RD400-3 | RD600-3          | RD800-3          | RD1000-3         | RD1200-3         |
|--------------------------------------------------------------------|------------------|------------------|------------------|--------------|---------|---------|------------------|------------------|------------------|------------------|
| 3-Pole                                                             | —                | —                | —                | —            | —       | —       | —                | —                | —                | —                |
| 4-Pole                                                             | —                | —                | —                | —            | RD200-4 | RD400-4 | RD600-4          | RD800-4          | RD1000-4         | RD1200-4         |
| Thermal Current $I_{th}$ @ 40°C (A)                                | 30               | 60               | 100              | —            | —       | —       | —                | —                | —                | —                |
| Rated insulation voltage $U_i$ (V)                                 | 800              | 800              | 800              | —            | —       | —       | 1000             | 1000             | 1000             | 1000             |
| Rated impulse withstand voltage $U_{imp}$ (kV)                     | 8                | 8                | 8                | —            | —       | —       | 12               | 12               | 12               | 12               |
| Rated Operation Currents $I_e$ (A)                                 |                  |                  |                  |              |         |         |                  |                  |                  |                  |
| Load Duty Category                                                 | A <sup>(1)</sup> | A <sup>(1)</sup> | A <sup>(1)</sup> | —            | —       | —       | A <sup>(1)</sup> | A <sup>(1)</sup> | A <sup>(1)</sup> | A <sup>(1)</sup> |
| Rated Voltage                                                      |                  |                  |                  |              |         |         |                  |                  |                  |                  |
| 400Vac AC-22 A                                                     | 32               | 63               | 100              | —            | —       | —       | 630              | 800              | 1000             | 1200             |
| 400Vac AC-23 A                                                     | 32               | 63               | 100              | —            | —       | —       | 630              | 800              | 1000             | 1000             |
| 690Vac AC-22 A                                                     | 32               | 63               | 80               | —            | —       | —       | 500              | 630              | 630              | 630              |
| 690Vac AC-23 A                                                     | 32               | 63               | 63               | —            | —       | —       | 200              | 400              | 400              | 400              |
| Operational Power (Vac) in AC-23 (kW)                              |                  |                  |                  |              |         |         |                  |                  |                  |                  |
| 400V w/o prebreak AC <sup>(1)(2)</sup>                             | 15               | 30               | 45               | —            | —       | —       | 355              | 450              | 560              | 560              |
| 500V w/o prebreak AC <sup>(1)(2)</sup>                             | 15               | 30               | 45               | —            | —       | —       | 450              | 560              | 560              | 560              |
| 690V w/o prebreak AC <sup>(1)(2)</sup>                             | 18.5             | 30               | 45               | —            | —       | —       | 185              | 400              | 400              | 400              |
| Overload Capacity ( $U_e$ 415Vac)                                  |                  |                  |                  |              |         |         |                  |                  |                  |                  |
| Rated short-time making capacity $I_{cm}$ (kA peak) <sup>(3)</sup> | 12               | 12               | 12               | —            | —       | —       | 48               | 75               | 48               | 75               |
| Fuse Protected Short-Circuit Withstand (kA rms prospective)        |                  |                  |                  |              |         |         |                  |                  |                  |                  |
| Short-Circuit Current (kA) <sup>(3)</sup>                          | 50               | 50               | 25               | —            | —       | —       | 100              | 100              | 100              | 100              |
| Associated Fuse Rating (A) <sup>(3)</sup>                          | 32               | 63               | 100              | —            | —       | —       | 630              | 800              | 1000             | 1250             |
| Connection                                                         |                  |                  |                  |              |         |         |                  |                  |                  |                  |
| Minimum Cu cable cross section (mm <sup>2</sup> )                  | 2.5              | 2.5              | 10               | —            | —       | —       | 2x150            | 2x185            | 2x240            | —                |
| Minimum Cu busbar section (mm <sup>2</sup> )                       | —                | —                | —                | —            | —       | —       | 2x30x5           | 2x40x5           | 2x50x5           | 2x60x5           |
| Maximum Cu cable section (mm <sup>2</sup> )                        | 70               | 70               | 70               | —            | —       | —       | —                | —                | —                | —                |

(1) A/B: Category with index A = frequent operation; category with index B = infrequent operation.

(2) The power value is given for information only; the current values vary from one manufacturer to another.

(3) For a rated operating voltage,  $U_e$  = 400Vac.

# UL 98 Non-Fused Rotary Disconnect Switches—30 to 1200A



## Specifications

|                                                                                                                                                                                                                                                                                                                                           |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <div>    </div> <div> <div>RD30-3</div> <div>RD200-3</div> <div>RD600-3</div> </div> |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| <b>Part Number</b>                                                                                                                                                                                                                                                                                                                        | <b>RD30-3</b>                                             | <b>RD60-3</b>                                             | <b>RD100-3</b>                                            | <b>RD100-3-SCCR</b>   | <b>RD200-3</b>        | <b>RD400-3</b>                                                                                                                  | <b>RD600-3</b>              | <b>RD800-3</b>              | <b>RD1000-3</b>             | <b>RD1200-3</b>             |
| <b>3-Pole</b>                                                                                                                                                                                                                                                                                                                             | —                                                         | —                                                         | —                                                         | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| <b>4-Pole</b>                                                                                                                                                                                                                                                                                                                             | —                                                         | —                                                         | —                                                         | —                     | RD200-4               | RD400-4                                                                                                                         | RD600-4                     | RD800-4                     | RD1000-4                    | RD1200-4                    |
| UL Standard                                                                                                                                                                                                                                                                                                                               | UL 98                                                     | UL 98                                                     | UL 98                                                     | UL 98                 | UL 98                 | UL 98                                                                                                                           | UL 98                       | UL 98                       | UL 98                       | UL 98                       |
| Max Ampacity                                                                                                                                                                                                                                                                                                                              | 30A                                                       | 60A                                                       | 100A                                                      | 100A                  | 200A                  | 400A                                                                                                                            | 600A                        | 800A                        | 1000A                       | 1200A                       |
| Switch Type                                                                                                                                                                                                                                                                                                                               | Compact                                                   | Compact                                                   | Compact                                                   | Standard              | Standard              | Standard                                                                                                                        | Standard                    | Standard                    | Standard                    | Standard                    |
| Handle Operation                                                                                                                                                                                                                                                                                                                          | Front/Side                                                | Front/Side                                                | Front/Side                                                | Front                 | Front                 | Front                                                                                                                           | Front                       | Front                       | Front                       | Front                       |
| <b>UL Electrical Ratings</b>                                                                                                                                                                                                                                                                                                              |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Max Voltage (AC)                                                                                                                                                                                                                                                                                                                          | 600Vac                                                    | 600Vac                                                    | 600Vac                                                    | 600Vac                | 600Vac                | 600Vac                                                                                                                          | 600Vac                      | 600Vac                      | 600Vac                      | 600Vac                      |
| Max Voltage (DC)                                                                                                                                                                                                                                                                                                                          | —                                                         | —                                                         | —                                                         | 250Vdc                | 250Vdc                | —                                                                                                                               | 250Vdc                      | —                           | —                           | —                           |
| Maximum AC Horsepower Ratings                                                                                                                                                                                                                                                                                                             |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| 1-Phase, 120Vac                                                                                                                                                                                                                                                                                                                           | 2                                                         | 3                                                         | 5                                                         | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| 1-Phase, 240Vac                                                                                                                                                                                                                                                                                                                           | 5                                                         | 10                                                        | 10                                                        | 10                    | 10                    | —                                                                                                                               | —                           | —                           | —                           | —                           |
| 3-Phase, 240Vac                                                                                                                                                                                                                                                                                                                           | 10                                                        | 20                                                        | 20                                                        | 30                    | 75                    | 125                                                                                                                             | 200                         | 200                         | 200                         | 200                         |
| 3-Phase, 480Vac                                                                                                                                                                                                                                                                                                                           | 20                                                        | 40                                                        | 50                                                        | 75                    | 150                   | 250                                                                                                                             | 400                         | 500                         | 500                         | 500                         |
| 3-Phase, 600Vac                                                                                                                                                                                                                                                                                                                           | 25                                                        | 50                                                        | 50                                                        | 100                   | 200                   | 350                                                                                                                             | 350                         | 500                         | 500                         | 500                         |
| DC Horsepower Ratings                                                                                                                                                                                                                                                                                                                     |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| 125Vdc                                                                                                                                                                                                                                                                                                                                    | —                                                         | —                                                         | —                                                         | —                     | —                     | —                                                                                                                               | 20                          | —                           | —                           | —                           |
| 250Vdc                                                                                                                                                                                                                                                                                                                                    | —                                                         | —                                                         | —                                                         | —                     | —                     | —                                                                                                                               | 50                          | —                           | —                           | —                           |
| <b>Electrical Characteristics</b>                                                                                                                                                                                                                                                                                                         |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| SCCR with Fuse                                                                                                                                                                                                                                                                                                                            | 100kA                                                     | 100kA                                                     | 25kA/100kA*                                               | 200kA                 | 200kA                 | 200kA                                                                                                                           | 200kA                       | 100kA                       | 100kA                       | 100kA                       |
| Fuse Class                                                                                                                                                                                                                                                                                                                                | J                                                         | J                                                         | J                                                         | J                     | J                     | J                                                                                                                               | J                           | L                           | L                           | L                           |
| Max. Fuse Rating                                                                                                                                                                                                                                                                                                                          | 30A                                                       | 60A                                                       | 100A                                                      | 100A                  | 200A                  | 400A                                                                                                                            | 600A                        | 800A                        | 1000A                       | 1200A                       |
| Terminal Lugs/Kits                                                                                                                                                                                                                                                                                                                        | Integral                                                  | Integral                                                  | Integral                                                  | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| Lug Mounting Torque - Lb-In (N•m)                                                                                                                                                                                                                                                                                                         | —                                                         | —                                                         | —                                                         | 160 (18)              | 160 (18)              | LUG2-... 310 (35)<br>LUG3-... 398 (45)                                                                                          | 310 (35)                    | 310 (35)                    | 310 (35)                    | 310 (35)                    |
| Wire Type                                                                                                                                                                                                                                                                                                                                 | 75°C Cu                                                   | 75°C Cu                                                   | 75°C Cu                                                   | 75°C Cu/Al            | 75°C Cu/Al            | 75°C Cu/Al                                                                                                                      | 75°C Cu/Al                  | 75°C Cu/Al                  | 75°C Cu/Al                  | 75°C Cu/Al                  |
| Wire Range & Torque - Lb-In (N•m)                                                                                                                                                                                                                                                                                                         |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Solid                                                                                                                                                                                                                                                                                                                                     | #12-10<br>35.4 (4)                                        | #12-10<br>35.4 (4)                                        | #12-10<br>35.4 (4)                                        | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| Stranded                                                                                                                                                                                                                                                                                                                                  | #10-1<br>35.4 (4)<br>1/0<br>39.8 (4.5)<br>2/0<br>44.3 (5) | #10-1<br>35.4 (4)<br>1/0<br>39.8 (4.5)<br>2/0<br>44.3 (5) | #10-1<br>35.4 (4)<br>1/0<br>39.8 (4.5)<br>2/0<br>44.3 (5) | #6-300MCM<br>275 (31) | #6-300MCM<br>275 (31) | LUG2-... #4-600MCM<br>550 (62)<br>Dual 1/0-250MCM<br>550 (62)<br>LUG3-... (2) #6-2<br>200 (22.6)<br>(2) #1-350MCM<br>375 (42.4) | (2) #2-600MCM<br>375 (42.4) | (4) #2-600MCM<br>375 (42.4) | (4) #2-600MCM<br>375 (42.4) | (4) #2-600MCM<br>375 (42.4) |
| <b>Mechanical Characteristics</b>                                                                                                                                                                                                                                                                                                         |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Endurances/Cycles                                                                                                                                                                                                                                                                                                                         | 10,000                                                    | 10,000                                                    | 10,000                                                    | 10,000                | 8000                  | 6000                                                                                                                            | 6000                        | 3500                        | 3500                        | 3500                        |
| <b>Physical Characteristics</b>                                                                                                                                                                                                                                                                                                           |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Dimensions                                                                                                                                                                                                                                                                                                                                |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| See drawings on product pages                                                                                                                                                                                                                                                                                                             |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Weight - Lbs (KG)                                                                                                                                                                                                                                                                                                                         |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| 3-Pole                                                                                                                                                                                                                                                                                                                                    | 1.3 (0.6)                                                 | 1.3 (0.6)                                                 | 1.3 (0.6)                                                 | 4.2 (1.91)            | 4.2 (1.91)            | 10.0 (4.6)                                                                                                                      | 18.1 (8.2)                  | 19.6 (8.9)                  | 19.6 (8.9)                  | 19.6 (8.9)                  |
| 4-Pole                                                                                                                                                                                                                                                                                                                                    | —                                                         | —                                                         | —                                                         | —                     | 5.0 (2.3)             | 12.3 (5.6)                                                                                                                      | 23.9 (10.9)                 | 25.3 (11.5)                 | 25.3 (11.5)                 | 25.3 (11.5)                 |
| <b>Environmental</b>                                                                                                                                                                                                                                                                                                                      |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Operating Temperature                                                                                                                                                                                                                                                                                                                     | -20°C to 70°C                                             | -20°C to 70°C                                             | -20°C to 70°C                                             | -20°C to 70°C         | -20°C to 70°C         | -20°C to 70°C                                                                                                                   | -20°C to 70°C               | -20°C to 70°C               | -20°C to 70°C               | -20°C to 70°C               |
| Flammability Rating                                                                                                                                                                                                                                                                                                                       | UL 94-V0                                                  | UL 94-V0                                                  | UL 94-V0                                                  | UL 94-V0              | UL 94-V0              | UL 94-V0                                                                                                                        | UL 94-V0                    | UL 94-V0                    | UL 94-V0                    | UL 94-V0                    |
| <b>Accessories</b>                                                                                                                                                                                                                                                                                                                        |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| Lug Kit Part #                                                                                                                                                                                                                                                                                                                            |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| 3-Pole                                                                                                                                                                                                                                                                                                                                    | Integral                                                  | Integral                                                  | Integral                                                  | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| 4-Pole                                                                                                                                                                                                                                                                                                                                    | —                                                         | —                                                         | —                                                         | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| Handles                                                                                                                                                                                                                                                                                                                                   |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| NEMA 1, 3R, 12                                                                                                                                                                                                                                                                                                                            | •                                                         | •                                                         | •                                                         | •                     | •                     | •                                                                                                                               | —                           | —                           | —                           | —                           |
| NEMA 1, 3R, 4, 4X, 12                                                                                                                                                                                                                                                                                                                     | •                                                         | •                                                         | •                                                         | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| Direct                                                                                                                                                                                                                                                                                                                                    | •                                                         | •                                                         | •                                                         | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| Front Pistol                                                                                                                                                                                                                                                                                                                              | —                                                         | —                                                         | —                                                         | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| Front or Side Selector                                                                                                                                                                                                                                                                                                                    | •                                                         | •                                                         | •                                                         | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| Shaft c/s - mm                                                                                                                                                                                                                                                                                                                            | 5x5                                                       | 5x5                                                       | 5x5                                                       | 10x10                 | 10x10                 | 10x10                                                                                                                           | 12x12                       | 12x12                       | 12x12                       | 12x12                       |
| Shaft Guide                                                                                                                                                                                                                                                                                                                               | •                                                         | •                                                         | •                                                         | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| Shrouds                                                                                                                                                                                                                                                                                                                                   | •                                                         | •                                                         | •                                                         | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| Additional Pole Accessory                                                                                                                                                                                                                                                                                                                 | •                                                         | •                                                         | •                                                         | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| Auxiliary Contacts                                                                                                                                                                                                                                                                                                                        |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |
| NO + NC                                                                                                                                                                                                                                                                                                                                   | •                                                         | •                                                         | •                                                         | •                     | •                     | •                                                                                                                               | •                           | •                           | •                           | •                           |
| (2) NO                                                                                                                                                                                                                                                                                                                                    | •                                                         | •                                                         | •                                                         | —                     | —                     | —                                                                                                                               | —                           | —                           | —                           | —                           |
| <ul style="list-style-type: none"> <li>• Available, see product page for details and part numbers.</li> <li>— Not available.</li> <li>* 25kA @ 600Vac, 100kA @ 480Vac.</li> </ul>                                                                                                                                                         |                                                           |                                                           |                                                           |                       |                       |                                                                                                                                 |                             |                             |                             |                             |

Disconnect  
Switches


## UL 98 Non-Fused Rotary Disconnect Switches—30, 60 and Compact 100A

For a Complete Assembly, Please Select:

|                                                                                     |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|-----------------------|---------------------------------------|-----------------------|---------------------------|---------|---------------------------|-----------|-------------|
| Select for Standard Applications                                                    | SWITCH                                                                              |    | Switch                                                                            |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | Switch Amp Rating                                                                 | No. of Poles                                                                        | SCCR                  | Max Horsepower Rating |                                       |                       |                           |         | Wire Size                 | Wire Type | Part Number |
|                                                                                     |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       | 1-Phase               |                                       | 3-Phase               |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | 120 Vac                                                                           | 220/240Vac                                                                          | 220/240Vac            | 440/480Vac            | 600 Vac                               |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | 30                                                                                | 3                                                                                   | 100kA                 | 2                     | 5                                     | 10                    | 20                        | 25      | #10-2/0 Str<br>#12-10 Sol | 75°C Cu   | RD30-3      |
|                                                                                     |                                                                                     |                                                                                     | 60                                                                                | 3                                                                                   | 100kA                 | 3                     | 10                                    | 20                    | 40                        | 50      | #10-2/0 Str<br>#12-10 Sol | 75°C Cu   | RD60-3      |
|                                                                                     | 100                                                                                 | 3                                                                                   | 25/100kA*                                                                         | 5                                                                                   | 10                    | 20                    | 50                                    | 50                    | #10-2/0 Str<br>#12-10 Sol | 75°C Cu | RD100-3                   |           |             |
|                                                                                     | * 100kA @480Vac, 25kA @ 600Vac.                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     | +                                                                                   |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     | Accessories                                                                         | HANDLES                                                                             |  | Direct Mount Handle - mounts directly to switch, no shaft required                  |                       |                       |                                       |                       |                           |         |                           |           |             |
| For Switch Part Number                                                              |                                                                                     |                                                                                     |                                                                                   | Color                                                                               |                       | Test Function         | Padlockable                           |                       | Part Number               |         |                           |           |             |
| All Switches                                                                        |                                                                                     |                                                                                     |                                                                                   | Black                                                                               |                       | N                     | Y - On Switch                         |                       | DIR-02                    |         |                           |           |             |
| OR                                                                                  |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |    | External Front or Right Side Operated Selector Handles - shaft required           |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | NEMA Type                                                                         | Color                                                                               | Handle Length         | Test Function         | Padlockable                           | Defeatable            | Part Number               |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | 1, 3R, 4, 4X, 12                                                                  | Black                                                                               | Short                 | N                     | Y                                     | Y                     | H4X-01B <sup>(1)</sup>    |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | 1, 3R, 4, 4X, 12                                                                  | Red/Yellow                                                                          | Short                 | N                     | Y                                     | Y                     | H4X-01R <sup>(1)</sup>    |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | 1, 3R, 4, 4X, 12                                                                  | Black                                                                               | Long                  | N                     | Y                                     | Y                     | H4X-02B <sup>(2)</sup>    |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | 1, 3R, 4, 4X, 12                                                                  | Red/Yellow                                                                          | Long                  | N                     | Y                                     | Y                     | H4X-02R <sup>(2)</sup>    |         |                           |           |             |
|                                                                                     |  | Shafts for Selector Handles                                                         |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     | Length in (mm)                                                                      | Mounting Depth (X) in (mm)                                                        |                                                                                     |                       |                       |                                       | Part Number           |                           |         |                           |           |             |
|                                                                                     |                                                                                     | 5.9 (150)                                                                           | 3.50~7.60 (89~193)                                                                |  |                       |                       |                                       | SH4-150               |                           |         |                           |           |             |
|                                                                                     |                                                                                     | 7.9 (200)                                                                           | 3.50~9.50 (89~241)                                                                |                                                                                     |                       |                       |                                       | SH4-200               |                           |         |                           |           |             |
| 12.6 (320)                                                                          | 3.50~14.9 (89~378)                                                                  |                                                                                     |                                                                                   |                                                                                     |                       | SH4-320               |                                       |                       |                           |         |                           |           |             |
|  | Shaft Guide                                                                         |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       | Part Number                           |                       |                           |         |                           |           |             |
| Required for 12.6" (320mm) long shafts, optional for other lengths                  |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
| SH-GUIDE1                                                                           |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
| and ...                                                                             |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
| Accessories                                                                         | AUX CONTACTS                                                                        |  | Auxiliary Contacts                                                                |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | Contact Type                                                                      | Number of Contacts                                                                  | Continuous Amp Rating | Voltage Rating        | Max Number of Aux Contacts per Switch | Part Number           |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | NO + NC                                                                           | 1 of each                                                                           | 10A                   | 240Vac                | 4                                     | BAC01                 |                           |         |                           |           |             |
|                                                                                     | NO                                                                                  | 2                                                                                   | 10A                                                                               | 240Vac                                                                              | 4                     | BAC02                 |                                       |                       |                           |         |                           |           |             |
|                                                                                     | and ...                                                                             |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     | SHROUDS                                                                             |  | Terminal Shrouds - includes terminal shroud for both lineside and loadside        |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | Switch Amp Rating                                                                 | Number of Poles                                                                     |                       |                       |                                       | Location on Switch    | Part Number               |         |                           |           |             |
|                                                                                     |                                                                                     |                                                                                     | All Switches                                                                      | 1 (for switched 4 <sup>th</sup> pole)                                               |                       |                       |                                       | Lineside and Loadside | TSH3-1TB                  |         |                           |           |             |
|                                                                                     | All Switches                                                                        | 3                                                                                   |                                                                                   |                                                                                     |                       | Lineside and Loadside | TSH3-3TB                              |                       |                           |         |                           |           |             |
|                                                                                     | and ...                                                                             |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
| SW. 4 <sup>TH</sup> POLE                                                            |  | Switched 4 <sup>th</sup> Pole - converts 3-pole switch to 4-pole                    |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         |                           |           |             |
|                                                                                     |                                                                                     | Switch Amp Rating                                                                   |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         | Part Number               |           |             |
|                                                                                     |                                                                                     | 30                                                                                  |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         | POLE98-30                 |           |             |
|                                                                                     |                                                                                     | 60                                                                                  |                                                                                   |                                                                                     |                       |                       |                                       |                       |                           |         | POLE98-60                 |           |             |
| 100                                                                                 |                                                                                     |                                                                                     |                                                                                   |                                                                                     |                       |                       |                                       |                       | POLE98-100                |         |                           |           |             |




Auxiliary Contact Configurations

Possible 4<sup>th</sup> Pole Configurations


# UL 98 Non-Fused Rotary Disconnect Switches—30, 60 and Compact 100A

## Dimensions - in (mm)


### Direct Handle Operation

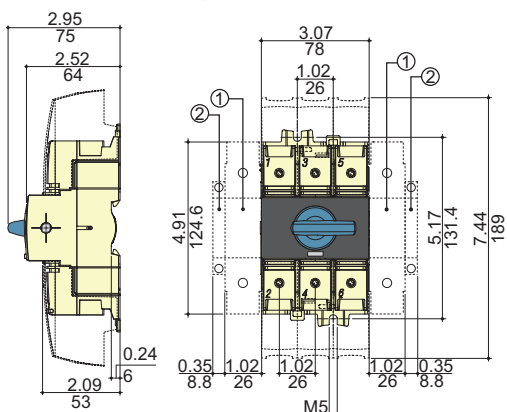

### External Front Operation

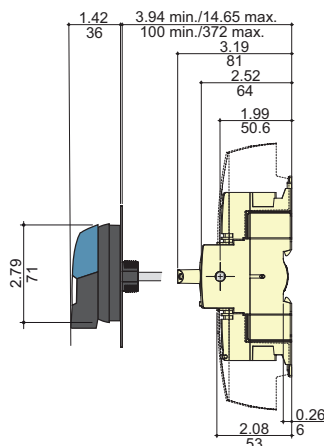

### External Right Side Operation

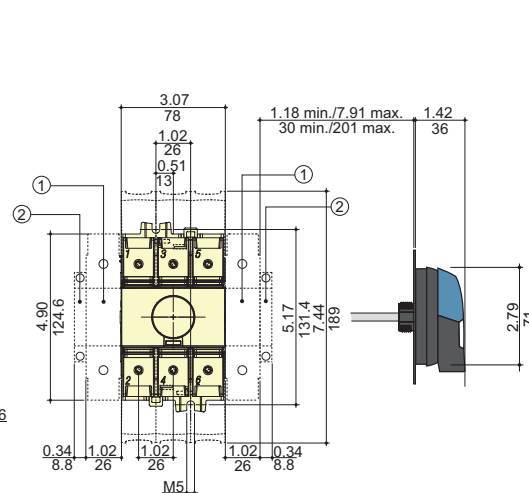

1. Position for 1 switched 4<sup>th</sup> pole (1 per device max.) or 1 auxiliary contact.
  2. Position for 1 auxiliary contact only.
- Note: Maximum of 4 auxiliary contacts, or 3 auxiliary contacts + one switched 4<sup>th</sup> pole.

Disconnect  
Switches





## External Front or Right Side Operated Selector Handle

### Handle Type

### Direction of Front Operation


### Direction of Right Side Operation

### Door Drilling Layouts

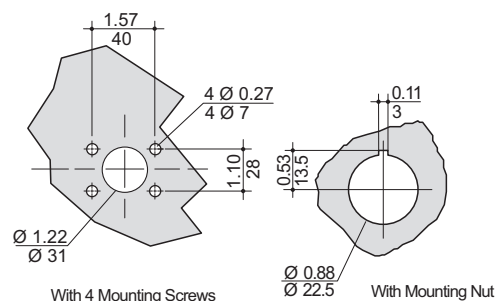

## UL 98 Non-Fused Rotary Disconnect Switches—100, 200 and 400A


For a Complete Assembly, Please Select:
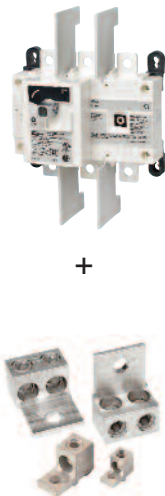
|                                                                                                                                  |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |
|----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------|---------------------------|------------------|---------------------------|----------------|----------------|
| <div style="writing-mode: vertical-rl; transform: rotate(180deg);">Select for Standard Applications</div>                        |   | <b>Switch</b>                                                             |                                                                                     |                                          |                           |                  |                           |                |                |
|                                                                                                                                  |                                                                                    | Switch<br>Amp<br>Rating                                                   | No. of<br>Poles                                                                     | SCCR                                     | Max Horsepower Rating     |                  |                           |                | Part<br>Number |
|                                                                                                                                  |                                                                                    |                                                                           |                                                                                     |                                          | 1-Phase<br>220/<br>240Vac | 220/<br>240Vac   | 3-Phase<br>440/<br>480Vac | 600<br>Vac     |                |
|                                                                                                                                  |                                                                                    | 100                                                                       | 3                                                                                   | 200kA                                    | 10                        | 30               | 75                        | 100            | RD100-3-SCCR   |
|                                                                                                                                  |                                                                                    | 200                                                                       | 3                                                                                   | 200kA                                    | 10                        | 75               | 150                       | 200            | RD200-3        |
|                                                                                                                                  |                                                                                    | 200                                                                       | 4                                                                                   | 200kA                                    | 10                        | 75               | 150                       | 200            | RD200-4        |
|                                                                                                                                  |                                                                                    | 400                                                                       | 3                                                                                   | 200kA                                    | -                         | 125              | 250                       | 350            | RD400-3        |
|                                                                                                                                  |                                                                                    | 400                                                                       | 4                                                                                   | 200kA                                    | -                         | 125              | 250                       | 350            | RD400-4        |
|                                                                                                                                  |                                                                                    | <b>Terminal Lug Kit</b>                                                   |                                                                                     |                                          |                           |                  |                           |                |                |
|                                                                                                                                  |                                                                                    | Switch<br>Amp Rating                                                      | No. of<br>Poles                                                                     | Lugs<br>Per Kit                          | Wire Range                |                  | Wire Type                 | Part<br>Number |                |
| 100-200                                                                                                                          | 2                                                                                  | 2                                                                         | #6-300MCM                                                                           |                                          | 75°C Cu/Al                | LUG1-2           |                           |                |                |
| 100-200                                                                                                                          | 3                                                                                  | 3                                                                         | #6-300MCM                                                                           |                                          | 75°C Cu/Al                | LUG1-3           |                           |                |                |
| 100-200                                                                                                                          | 4                                                                                  | 4                                                                         | #6-300MCM                                                                           |                                          | 75°C Cu/Al                | LUG1-4           |                           |                |                |
| 400                                                                                                                              | 2                                                                                  | 2                                                                         | #4-600MCM or Dual 1/0-250MCM                                                        |                                          | 75°C Cu/Al                | LUG2-2           |                           |                |                |
| 400                                                                                                                              | 3                                                                                  | 3                                                                         | #4-600MCM or Dual 1/0-250MCM                                                        |                                          | 75°C Cu/Al                | LUG2-3           |                           |                |                |
| 400                                                                                                                              | 4                                                                                  | 4                                                                         | #4-600MCM or Dual 1/0-250MCM                                                        |                                          | 75°C Cu/Al                | LUG2-4           |                           |                |                |
| 400                                                                                                                              | 2                                                                                  | 2                                                                         | (2) #6-350MCM                                                                       |                                          | 75°C Cu/Al                | LUG3-2           |                           |                |                |
| 400                                                                                                                              | 3                                                                                  | 3                                                                         | (2) #6-350MCM                                                                       |                                          | 75°C Cu/Al                | LUG3-3           |                           |                |                |
| 400                                                                                                                              | 4                                                                                  | 4                                                                         | (2) #6-350MCM                                                                       |                                          | 75°C Cu/Al                | LUG3-4           |                           |                |                |
| <div style="writing-mode: vertical-rl; transform: rotate(180deg);">Accessories</div>                                             |  | <b>Direct Mount Handle - mounts directly to switch, no shaft required</b> |                                                                                     |                                          |                           |                  |                           |                |                |
|                                                                                                                                  |                                                                                    | For Switch<br>Part Number                                                 |                                                                                     | Color                                    |                           | Test<br>Function | Padlockable               |                | Part<br>Number |
|                                                                                                                                  |                                                                                    | All Switches                                                              |                                                                                     | Black                                    |                           | N                | Y                         |                | DIR-03         |
|                                                                                                                                  |                                                                                    | or                                                                        |                                                                                     |                                          |                           |                  |                           |                |                |
|                                                                                                                                  |                                                                                    | <b>External Front Operated Pistol Handles - shaft required</b>            |                                                                                     |                                          |                           |                  |                           |                |                |
|                                                                                                                                  |                                                                                    | NEMA<br>Type                                                              |                                                                                     | Color                                    |                           | Test<br>Function | Padlockable               | Defeatable     | Part<br>Number |
|                                                                                                                                  |                                                                                    | 1, 3R, 12                                                                 |                                                                                     | Black                                    |                           | N                | Y                         | Y              | H12-03B        |
|                                                                                                                                  |                                                                                    | 1, 3R, 12                                                                 |                                                                                     | Red/Yellow                               |                           | N                | Y                         | Y              | H12-03R        |
|                                                                                                                                  |                                                                                    | 1, 3R, 4, 4X, 12                                                          |                                                                                     | Black                                    |                           | N                | Y                         | Y              | H4X-06B        |
|                                                                                                                                  |                                                                                    | 1, 3R, 4, 4X, 12                                                          |                                                                                     | Red/Yellow                               |                           | N                | Y                         | Y              | H4X-06R        |
| <b>Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required</b>                                        |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |
| NEMA<br>Type                                                                                                                     |                                                                                    | Color                                                                     |                                                                                     | Test<br>Function                         | Padlockable               | Defeatable       | Part<br>Number            |                |                |
| 1, 3R, 4, 4X, 12                                                                                                                 |                                                                                    | Black                                                                     |                                                                                     | N                                        | Y                         | Y                | H4X-06BHD                 |                |                |
| 1, 3R, 4, 4X, 12                                                                                                                 |                                                                                    | Red/Yellow                                                                |                                                                                     | N                                        | Y                         | Y                | H4X-06RHD                 |                |                |
| <b>Shafts for Pistol Handles</b>                                                                                                 |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |
| Length<br>in (mm)                                                                                                                | Mounting Depth<br>(X) in (mm)                                                      |                                                                           |                                                                                     |                                          |                           |                  | Part<br>Number            |                |                |
| 7.9 (200)                                                                                                                        | 5.31~10.43 (135~265)                                                               |                                                                           |  |                                          |                           |                  | SH5-200                   |                |                |
| 12.6 (320)                                                                                                                       | 5.31~15.16 (135~385)                                                               |                                                                           |                                                                                     |                                          |                           |                  | SH5-320                   |                |                |
| 15.7 (400)                                                                                                                       | 5.31~18.31 (135~465)                                                               |                                                                           |                                                                                     |                                          |                           |                  | SH5-400                   |                |                |
| <b>Shaft Guide</b>                                                                                                               |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |
|                                                                                                                                  |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  | Part<br>Number            |                |                |
| Required for 15.7" (400mm) long shafts, optional for other lengths                                                               |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  | SH-GUIDE2                 |                |                |
| and ...                                                                                                                          |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |
| <b>Auxiliary Contacts</b>                                                                                                        |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |
| Contact<br>Type                                                                                                                  | Number of<br>Contacts                                                              | Continuous<br>Amp Rating                                                  | Voltage<br>Rating                                                                   | Max Number of Aux<br>Contacts per Switch | Part<br>Number            |                  |                           |                |                |
| NO + NC                                                                                                                          | 1 of each                                                                          | 10.1A                                                                     | 125-250Vac                                                                          | 2                                        | BAC03*                    |                  |                           |                |                |
| NO + NC                                                                                                                          | 1 of each                                                                          | 10.1A                                                                     | 125-250Vac                                                                          | 2                                        | BAC04*                    |                  |                           |                |                |
| NO + NC                                                                                                                          | 1 of each                                                                          | 1A                                                                        | 125Vac                                                                              | 2                                        | BAC11*                    |                  |                           |                |                |
| NO + NC                                                                                                                          | 1 of each                                                                          | 1A                                                                        | 125Vac                                                                              | 2                                        | BAC12*                    |                  |                           |                |                |
| * For one auxiliary contact, install either BAC03 or BAC11. For two auxiliary contacts, install BAC03 + BAC04, or BAC11 + BAC12. |                                                                                    |                                                                           |                                                                                     |                                          |                           |                  |                           |                |                |


# UL 98 Non-Fused Rotary Disconnect Switches—100, 200 and 400A

| Accessories |                                                                                   | and ...                                                                     |                 |                      |             |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------|----------------------|-------------|
| SHROUDS     |  | <b>Terminal Shrouds</b> - includes terminal shroud for lineside or loadside |                 |                      |             |
|             |                                                                                   | Switch Amp Rating                                                           | Number of Poles | Location on Switch   | Part Number |
|             |                                                                                   | 100-200A                                                                    | 3               | Lineside             | TSH4-3T     |
|             |                                                                                   | 100-200A                                                                    | 3               | Loadside             | TSH4-3B     |
|             |                                                                                   | 100-200A                                                                    | 4               | Lineside or Loadside | TSH4-4TB    |
|             |                                                                                   | 400A                                                                        | 3               | Lineside             | TSH5-3T     |
|             |                                                                                   | 400A                                                                        | 3               | Loadside             | TSH5-3B     |
|             |                                                                                   | 400A                                                                        | 4               | Lineside or Loadside | TSH5-4TB    |

## Dimensions - in (mm)

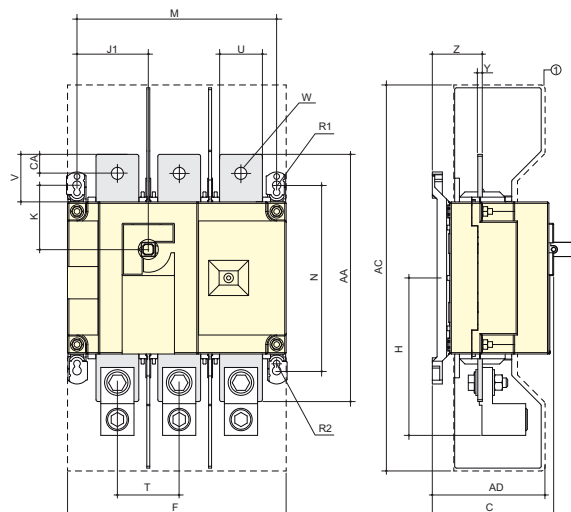


## Terminal Lugs

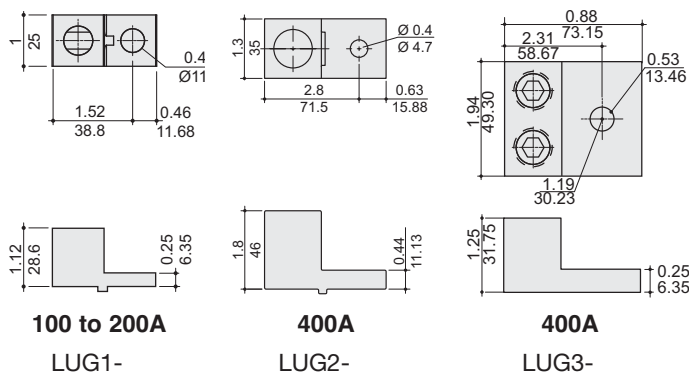

| Switch<br>Rating<br>(A) | Overall<br>Dimen.<br>C | Terminal<br>Shrouds |                | Switch<br>Body |               |               |              |               |                | Switch<br>Mounting |               |               |             |             | Connection   |              |              |              |               |                |               |             |  |
|-------------------------|------------------------|---------------------|----------------|----------------|---------------|---------------|--------------|---------------|----------------|--------------------|---------------|---------------|-------------|-------------|--------------|--------------|--------------|--------------|---------------|----------------|---------------|-------------|--|
|                         |                        | AC                  | AD             | F 3p.          | F 4p.         | H             | J1 3p.       | J1 4p.        | K              | M 3p.              | M 4p.         | N             | R1          | R2          | T            | U            | V            | W            | Y             | Z              | AA            | AC          |  |
| 100                     | 3.72<br>(94.6)         | 10.1<br>(256)       | 3.05<br>(77.5) | 7.09<br>(180)  | 9.06<br>(230) | 4.22<br>(107) | 2.17<br>(55) | 4.13<br>(105) | 1.8<br>(45.6)  | 6.3<br>(160)       | 8.27<br>(210) | 5.31<br>(135) | 0.35<br>(9) | 0.27<br>(7) | 1.97<br>(50) | 0.98<br>(25) | 1.18<br>(30) | 0.43<br>(11) | 0.14<br>(3.5) | 1.35<br>(34.4) | 6.3<br>(160)  | 0.6<br>(15) |  |
| 200                     | 3.72<br>(94.6)         | 10.1<br>(256)       | 3.05<br>(77.5) | 7.09<br>(180)  | 9.06<br>(230) | 4.22<br>(107) | 2.17<br>(55) | 4.13<br>(105) | 1.8<br>(45.6)  | 6.3<br>(160)       | 8.27<br>(210) | 5.31<br>(135) | 0.35<br>(9) | 0.27<br>(7) | 1.97<br>(50) | 0.98<br>(25) | 1.18<br>(30) | 0.43<br>(11) | 0.14<br>(3.5) | 1.35<br>(34.4) | 6.3<br>(160)  | 0.6<br>(15) |  |
| 400                     | 4.92<br>(128)          | 16<br>(406)         | 4.15<br>(115)  | 9.05<br>(230)  | 11.4<br>(290) | 6.53<br>(166) | 2.95<br>(75) | 5.31<br>(135) | 2.65<br>(67.5) | 8.26<br>(210)      | 10.6<br>(270) | 7.67<br>(195) | 0.35<br>(9) | 0.27<br>(7) | 2.56<br>(65) | 1.77<br>(45) | 1.97<br>(50) | 0.43<br>(13) | 0.2<br>(5)    | 2.08<br>(53)   | 10.2<br>(260) | 0.8<br>(20) |  |


## Direct Mount Handle

## External Front Handle




DIR-03


### Handle Type



### Direction of Front Operation




### Door Drilling Layout





## UL 98 Non-Fused Rotary Disconnect Switches—600, 800, 1000 and 1200A

For a Complete Assembly, Please Select:
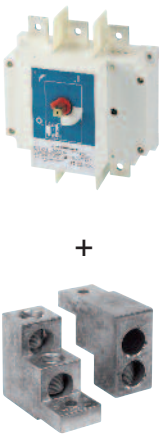
| SWITCH + LUGS                                                                                                                    |    | Switch                                                                              |                    |                       |                          |                                       |                        |             |             | Part Number |  |  |
|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|-----------------------|--------------------------|---------------------------------------|------------------------|-------------|-------------|-------------|--|--|
|                                                                                                                                  |                                                                                     | Switch Amp Rating                                                                   | No. of Poles       | SCCR                  | Max Horsepower Rating    |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     |                                                                                     |                    |                       | 3-Phase                  |                                       |                        | DC*         |             |             |  |  |
|                                                                                                                                  |                                                                                     |                                                                                     |                    |                       | 220/240Vac               | 440/480Vac                            | 600 Vac                |             |             |             |  |  |
|                                                                                                                                  | 600A                                                                                | 3                                                                                   | 200kA              | 240                   | 400                      | 350                                   | 20                     | 50          | RD600-3     |             |  |  |
|                                                                                                                                  | 600A                                                                                | 4                                                                                   | 200kA              | 240                   | 400                      | 350                                   | 20                     | 50          | RD600-4     |             |  |  |
|                                                                                                                                  | 800A                                                                                | 3                                                                                   | 100kA              | 200                   | 500                      | 500                                   | -                      | -           | RD800-3     |             |  |  |
|                                                                                                                                  | 800A                                                                                | 4                                                                                   | 100kA              | 200                   | 500                      | 500                                   | -                      | -           | RD800-4     |             |  |  |
|                                                                                                                                  | 1000A                                                                               | 3                                                                                   | 100kA              | 200                   | 500                      | 500                                   | -                      | -           | RD1000-3    |             |  |  |
|                                                                                                                                  | 1000A                                                                               | 4                                                                                   | 100kA              | 200                   | 500                      | 500                                   | -                      | -           | RD1000-4    |             |  |  |
|                                                                                                                                  | 1200A                                                                               | 3                                                                                   | 100kA              | 200                   | 500                      | 500                                   | -                      | -           | RD1200-3    |             |  |  |
|                                                                                                                                  | 1200A                                                                               | 4                                                                                   | 100kA              | 200                   | 500                      | 500                                   | -                      | -           | RD1200-4    |             |  |  |
| * DC Ratings use two poles in series.                                                                                            |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| SELECT FOR STANDARD APPLICATIONS                                                                                                 |    | Terminal Lug Kit                                                                    |                    |                       |                          |                                       |                        |             | Part Number |             |  |  |
|                                                                                                                                  |                                                                                     | Switch Amp Rating                                                                   | No. of Poles       | Lugs Per Kit          | Lugs Required per Pole   | Wire Range                            | Wire Type              |             |             |             |  |  |
|                                                                                                                                  |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| 600                                                                                                                              | 3                                                                                   | 3                                                                                   | 1                  | (2) #2-600MCM         | 75°C Cu/Al               | LUG5-3                                |                        |             |             |             |  |  |
| 600                                                                                                                              | 4                                                                                   | 4                                                                                   | 1                  | (2) #2-600MCM         | 75°C Cu/Al               | LUG5-4                                |                        |             |             |             |  |  |
| 800-1200                                                                                                                         | 3                                                                                   | 6                                                                                   | 2                  | (4) #2-600MCM         | 75°C Cu/Al               | LUG6-6                                |                        |             |             |             |  |  |
| 800-1200                                                                                                                         | 4                                                                                   | 8                                                                                   | 2                  | (4) #2-600MCM         | 75°C Cu/Al               | LUG6-8                                |                        |             |             |             |  |  |
| +                                                                                                                                |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| HANDLE                                                                                                                           |   | Direct Mount Handle - mounts directly to switch, no shaft required                  |                    |                       |                          |                                       |                        | Part Number |             |             |  |  |
|                                                                                                                                  |                                                                                     | For Switch Part Number                                                              | Color              | Test Function         | Padlockable              |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | All Switches                                                                        | Black              | N                     | Y                        | DIR-04                                |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | or                                                                                  |                    |                       |                          |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | External Front Operated Pistol Handles - shaft required                             |                    |                       |                          |                                       |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | NEMA Type                                                                           | Color              | Test Function         | Padlockable              | Defeatable                            | Part Number            |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                    | Black              | N                     | Y                        | Y                                     | H4X-07B <sup>(1)</sup> |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                    | Red/Yellow         | N                     | Y                        | Y                                     | H4X-07R <sup>(1)</sup> |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                    | Black              | N                     | Y                        | Y                                     | H4X-08B <sup>(2)</sup> |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | 1, 3R, 4, 4X, 12                                                                    | Red/Yellow         | N                     | Y                        | Y                                     | H4X-08R <sup>(2)</sup> |             |             |             |  |  |
| Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required                                               |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| NEMA Type                                                                                                                        | Color                                                                               | Test Function                                                                       | Padlockable        | Defeatable            | Part Number              |                                       |                        |             |             |             |  |  |
| 1, 3R, 4, 4X, 12                                                                                                                 | Black                                                                               | N                                                                                   | Y                  | Y                     | H4X-07BHD <sup>(3)</sup> |                                       |                        |             |             |             |  |  |
| 1, 3R, 4, 4X, 12                                                                                                                 | Red/Yellow                                                                          | N                                                                                   | Y                  | Y                     | H4X-07RHD <sup>(3)</sup> |                                       |                        |             |             |             |  |  |
| 1, 3R, 4, 4X, 12                                                                                                                 | Black                                                                               | N                                                                                   | Y                  | Y                     | H4X-08BHD <sup>(4)</sup> |                                       |                        |             |             |             |  |  |
| 1, 3R, 4, 4X, 12                                                                                                                 | Red/Yellow                                                                          | N                                                                                   | Y                  | Y                     | H4X-08RHD <sup>(4)</sup> |                                       |                        |             |             |             |  |  |
| Shafts for Pistol Handles                                                                                                        |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| Length in (mm)                                                                                                                   | Mounting Depth (X) in (mm)                                                          |                                                                                     |                    |                       |                          | Part Number                           |                        |             |             |             |  |  |
| 7.9 (200)                                                                                                                        | 8.70~13.50 (221~343)                                                                |  |                    |                       |                          | SH6-200                               |                        |             |             |             |  |  |
| 12.6 (320)                                                                                                                       | 8.70~18.23 (221~463)                                                                |                                                                                     |                    |                       |                          | SH6-320                               |                        |             |             |             |  |  |
| 15.7 (400)                                                                                                                       | 8.70~21.38 (221~543)                                                                |                                                                                     |                    |                       |                          | SH6-400                               |                        |             |             |             |  |  |
| Shaft Guide                                                                                                                      |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| Required for 15.7" (400mm) long shafts, optional for other lengths                                                               |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             | SH-GUIDE2   |  |  |
| and ...                                                                                                                          |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |
| ACCESSORIES                                                                                                                      |  | Auxiliary Contacts                                                                  |                    |                       |                          |                                       | Part Number            |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | Contact Type                                                                        | Number of Contacts | Continuous Amp Rating | Voltage Rating           | Max Number of Aux Contacts per Switch |                        |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | NO + NC                                                                             | 1 of each          | 10.1A                 | 125-250Vac               | 2                                     | BAC03*                 |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | NO + NC                                                                             | 1 of each          | 10.1A                 | 125-250Vac               | 2                                     | BAC04*                 |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | NO + NC                                                                             | 1 of each          | 1A                    | 125Vac                   | 2                                     | BAC11*                 |             |             |             |  |  |
|                                                                                                                                  |                                                                                     | NO + NC                                                                             | 1 of each          | 1A                    | 125Vac                   | 2                                     | BAC12*                 |             |             |             |  |  |
| * For one auxiliary contact, install either BAC03 or BAC11. For two auxiliary contacts, install BAC03 + BAC04, or BAC11 + BAC12. |                                                                                     |                                                                                     |                    |                       |                          |                                       |                        |             |             |             |  |  |

# UL 98 Non-Fused Rotary Disconnect Switches—600, 800, 1000 and 1200A

Accessories

SHROUDS




and ...


| Terminal Shrouds* - includes terminal shroud for lineside or loadside |                 |                      |             |
|-----------------------------------------------------------------------|-----------------|----------------------|-------------|
| Switch Amp Rating                                                     | Number of Poles | Location on Switch   | Part Number |
| 600A                                                                  | 3               | Lineside or Loadside | TSH6-3TB    |
| 600A                                                                  | 4               | Lineside or Loadside | TSH6-4TB    |
| 800-1200A                                                             | 3               | Lineside or Loadside | TSH7-3TB    |
| 800-1200A                                                             | 4               | Lineside or Loadside | TSH7-4TB    |

\* Shroud for lineside included with switch.

## Dimensions - in (mm) 600A

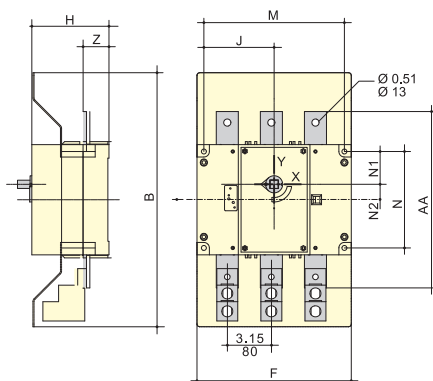



## 800 to 1200A

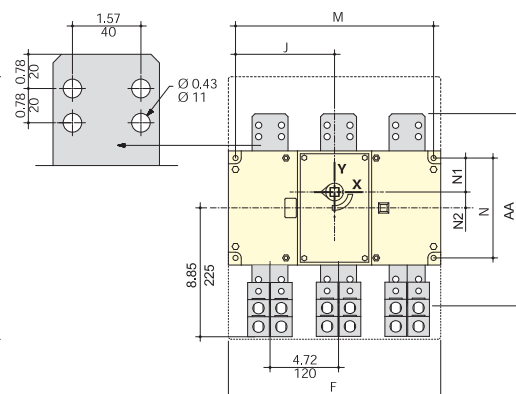


| Switch Rating (A) | Terminal Shrouds B | Switch Body |             |           |              |              | Switch Mounting |             |            |             |           | Connection |           |
|-------------------|--------------------|-------------|-------------|-----------|--------------|--------------|-----------------|-------------|------------|-------------|-----------|------------|-----------|
|                   |                    | F 3p.       | F 4p.       | H         | J 3p.        | J 4p.        | M 3p.           | M 4p.       | N          | N1          | N2        | AA         | Z         |
| 600               | 18.12 (460)        | 11 (280)    | 14.17 (360) | 5.5 (140) | 5 (127.5)    | 6.59 (167.5) | 10.03 (255)     | 13.19 (335) | 6.88 (175) | 2.34 (59.5) | 1.10 (28) | 12.6 (320) | 1.85 (47) |
| 800               | 18.12 (460)        | 14.64 (372) | 19.37 (492) | 5.5 (140) | 6.83 (173.5) | 9.19 (233.5) | 13.66 (347)     | 18.38 (467) | 6.88 (175) | 2.34 (59.5) | 1.10 (28) | 13 (330)   | 1.85 (47) |
| 1000              | 18.12 (460)        | 14.64 (372) | 19.37 (492) | 5.5 (140) | 6.83 (173.5) | 9.19 (233.5) | 13.66 (347)     | 18.38 (467) | 6.88 (175) | 2.34 (59.5) | 1.10 (28) | 13 (330)   | 1.85 (47) |
| 1200              | 18.12 (460)        | 14.64 (372) | 19.37 (492) | 5.5 (140) | 6.83 (173.5) | 9.19 (233.5) | 13.66 (347)     | 18.38 (467) | 6.88 (175) | 2.34 (59.5) | 1.10 (28) | 13 (330)   | 1.85 (47) |

## External Front Pistol Handles


Handle Type Direction of Front Operation

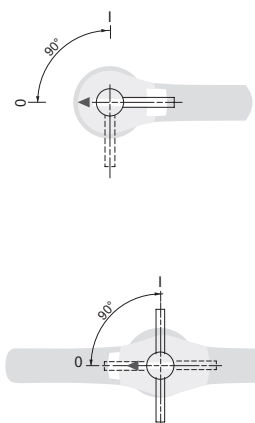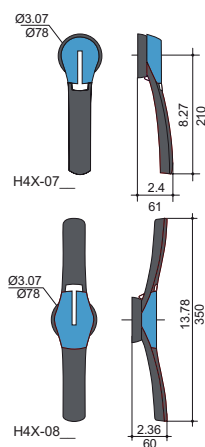


Door Drilling Layout



## Direct Mount Handle



## Terminal Lugs

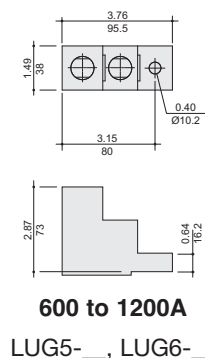

# UL 508 Non-Fused Rotary Disconnect Switches—16 to 80A

## Description

Bussmann UL 508 load break disconnect switches allow safe control and safe disconnection of any motor application or to isolate a circuit within the panel.

These disconnect switches are compact and offer a wide variety of accessories like 4<sup>th</sup> poles, auxiliary contacts, door mounting and 6/8-Pole kits.

## Features

- Suitable as motor disconnect
- DIN-Rail or panel mount
- Door mount option
- Disconnect switches are front, right side or direct handle operable
- Finger-safe

## Agency Information

- UL508, Guide NLRV, File E155129
- CSA C22.2 No. 14, File 257020
- Conforms with IEC 60947-3

## Online Resources

Visit [www.cooperbussmann.com/Disconnects](http://www.cooperbussmann.com/Disconnects) for:

- CAD Drawings
- Instruction Sheets
- UL Information



**QuikShip**  
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Bussmann representative for details.

## Related Cooper Bussmann Products

| Product                                  | Data Sheet # |
|------------------------------------------|--------------|
| <b>Fuses Blocks</b>                      |              |
| Modular Knifeblade Fuse Blocks 100-600A  | 3192         |
| <b>Fuses Holders</b>                     |              |
| CH Series Class CC, Midget & 10x38 0-30A | 3185         |
| Finger-Safe Optima Series 0-30A          | 1102         |
| Optima™ Protection Modules 0-30A         | 1109         |
| CH Series Class J 0-60A                  | 2144         |

## IEC Electrical Specifications



RD16-3-508



RD16-3-508 with 6-Pole Conversion Kit

| Part Number                                                        | RD16-3-508      | RD25-3-508 | RD40-3-508 | RD63-3-508 | RD80-3-508 |
|--------------------------------------------------------------------|-----------------|------------|------------|------------|------------|
| Thermal Current $I_{th}$ at 40°C (A)                               | 16              | 25         | 40         | 63         | 80         |
| Rated insulation voltage $U_i$ (V)                                 | 800             | 800        | 800        | 800        | 800        |
| Rated impulse withstand voltage $U_{imp}$ (kV)                     | 8               | 8          | 8          | 8          | 8          |
| <b>Rated Operation Currents <math>I_n</math> (A)</b>               |                 |            |            |            |            |
| Load Duty Category                                                 | Rated Voltage   |            |            |            |            |
| 500Vac                                                             | AC-22 A/AC-22 B | A/B (1)    | A/B (1)    | A/B (1)    | A/B (1)    |
| 500Vac                                                             | AC-23 A/AC-23 B | 16/16      | 25/25      | 40/40      | 80/80      |
| 690Vac                                                             | AC-21 A/AC-21 B | 16/16      | 25/25      | 63/63      | 80/80      |
| 690Vac                                                             | AC-22 A/AC-22 B | 16/16      | 25/25      | 63/63      | 80/80      |
| 690Vac                                                             | AC-23 A/AC-23 B | 16/16      | 25/25      | 40/63      | 63/80      |
| 690Vac                                                             |                 | 16/16      | 25/25      | 40/40      | 40/40      |
| <b>Operational Power in AC-23 (kW)</b>                             |                 |            |            |            |            |
| 400Vac without prebreak AC (1)(2)                                  | 7.5             | 11         | 18.5       | 30         | 37         |
| 500Vac without prebreak AC (1)(2)                                  | 7.5             | 11         | 15         | 30         | 37         |
| 690Vac without prebreak AC (1)(2)                                  | 7.5             | 15         | 18.5       | 30         | 37         |
| <b>Overload Capacity (<math>U_n</math> 415 Vac)</b>                |                 |            |            |            |            |
| Rated short-time withstand current 0.3 s. $I_{cw}$ (kA rms) (3)    | 2.5             | 2.5        | 2.5        | 3          | 3          |
| Rated short-time making capacity $I_{cm}$ (kA peak) (3)            | 6               | 6          | 6          | 9          | 9          |
| <b>Fuse Protected Short-Circuit Withstand (kA rms Prospective)</b> |                 |            |            |            |            |
| Prospective short-circuit current (kA rms) (3)                     | 50              | 50         | 50         | 50         | 50         |
| Associated fuse rating (A) (3)                                     | 16              | 25         | 40         | 63         | 80         |
| <b>Connection</b>                                                  |                 |            |            |            |            |
| Minimum Cu cable cross section (mm <sup>2</sup> )                  | 1.5             | 1.5        | 1.5        | 2.5        | 2.5        |
| Maximum Cu cable section (mm <sup>2</sup> )                        | 16              | 16         | 16         | 35         | 35         |
| Tightening torque min/max (N·m)                                    | 2/2.2           | 2/2.2      | 2/2.2      | 3.5/3.85   | 3.5/3.85   |

(1) A/B: Category with index A = frequent operation; category with index B = infrequent operation.

(2) The power value is given for information only; the current values vary from one manufacturer to another.

(3) For a rated operating voltage,  $U_n$  = 400Vac.

# UL 508 Non-Fused Rotary Disconnect Switches—16 to 80A


## Specifications

|                                                                                   |                                          |                                                                                     |                                          |                                          |                                          |
|-----------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
|  |                                          |  |                                          |                                          |                                          |
| RD16-3-508                                                                        |                                          | RD16-3-508 with 6-Pole Conversion Kit                                               |                                          |                                          |                                          |
| Part Number                                                                       | RD16-3-508                               | RD25-3-508                                                                          | RD40-3-508                               | RD63-3-508                               | RD80-3-508                               |
| UL Standard                                                                       | UL 508                                   | UL 508                                                                              | UL 508                                   | UL 508                                   | UL 508                                   |
| Max Ampacity                                                                      | 16A                                      | 25A                                                                                 | 40A                                      | 63A                                      | 80A                                      |
| Handle Operation                                                                  | Front/Side                               | Front/Side                                                                          | Front/Side                               | Front/Side                               | Front/Side                               |
| UL Electrical Ratings                                                             |                                          |                                                                                     |                                          |                                          |                                          |
| Max Voltage (AC)                                                                  | 600Vac                                   | 600Vac                                                                              | 600Vac                                   | 600Vac                                   | 600Vac                                   |
| Maximum Horsepower Ratings                                                        |                                          |                                                                                     |                                          |                                          |                                          |
| 3-Phase, 208Vac                                                                   | 3                                        | 7.5                                                                                 | 7.5                                      | 15                                       | 15                                       |
| 3-Phase, 240Vac                                                                   | 5                                        | 7.5                                                                                 | 7.5                                      | 20                                       | 20                                       |
| 3-Phase, 480Vac                                                                   | 10                                       | 15                                                                                  | 20                                       | 40                                       | 40                                       |
| 3-Phase, 600Vac                                                                   | 10                                       | 20                                                                                  | 25                                       | 40                                       | 40                                       |
| Electrical Characteristics                                                        |                                          |                                                                                     |                                          |                                          |                                          |
| SCCR with Fuse                                                                    | 65kA                                     | 65kA                                                                                | 10/65kA                                  | 50/65kA                                  | 50/65kA                                  |
| Recommended Upstream Fuse Class                                                   | J                                        | J                                                                                   | J                                        | J                                        | J                                        |
| Max. Fuse Rating                                                                  | 30A                                      | 30A                                                                                 | 60/30A                                   | 100/60A                                  | 100/60A                                  |
| Terminals                                                                         | Integral                                 | Integral                                                                            | Integral                                 | Integral                                 | Integral                                 |
| Wire Type                                                                         | 75°C Cu                                  | 75°C Cu                                                                             | 75°C Cu                                  | 75°C Cu                                  | 75°C Cu                                  |
| Wire Range & Torque - Lb-IN (N•m)                                                 |                                          |                                                                                     |                                          |                                          |                                          |
| Solid                                                                             |                                          |                                                                                     |                                          |                                          |                                          |
| Single                                                                            | #14-10<br>26.5 (3)                       | #14-10<br>26.5 (3)                                                                  | #14-10<br>26.5 (3)                       | #14-10<br>31.1 (3.5)                     | #14-10<br>31.1 (3.5)                     |
| Dual                                                                              | #12<br>26.5 (3)                          | #12<br>26.5 (3)                                                                     | #12<br>26.5 (3)                          | #12<br>31.1 (3.5)                        | #12<br>31.1 (3.5)                        |
| Stranded                                                                          |                                          |                                                                                     |                                          |                                          |                                          |
| Single                                                                            | #14-4<br>26.5 (3)                        | #14-4<br>26.5 (3)                                                                   | #14-4<br>26.5 (3)                        | #14-1<br>31.1 (3.5)                      | #14-1<br>31.1 (3.5)                      |
| Dual                                                                              | #14-12<br>26.5 (3)                       | #14-12<br>26.5 (3)                                                                  | #14-12<br>26.5 (3)                       | #10-6<br>31.1 (3.5)                      | #10-6<br>31.1 (3.5)                      |
| Mechanical Characteristics                                                        |                                          |                                                                                     |                                          |                                          |                                          |
| Endurances/Cycles                                                                 | 10,000                                   | 10,000                                                                              | 10,000                                   | 10,000                                   | 10,000                                   |
| Physical Characteristics                                                          |                                          |                                                                                     |                                          |                                          |                                          |
| Dimensions - See drawings on product pages                                        |                                          |                                                                                     |                                          |                                          |                                          |
| Weight - Lb (KG)                                                                  | 0.5 (0.2)                                | 0.5 (0.2)                                                                           | 0.5 (0.2)                                | 0.7 (0.32)                               | 0.7 (0.32)                               |
| Environmental                                                                     |                                          |                                                                                     |                                          |                                          |                                          |
| Operating Temperature                                                             | -20°C to 70°C                            | -20°C to 70°C                                                                       | -20°C to 70°C                            | -20°C to 70°C                            | -20°C to 70°C                            |
| Flammability Rating                                                               | UL 94-V0                                 | UL 94-V0                                                                            | UL 94-V0                                 | UL 94-V0                                 | UL 94-V0                                 |
| Accessories                                                                       |                                          |                                                                                     |                                          |                                          |                                          |
| Handles                                                                           |                                          |                                                                                     |                                          |                                          |                                          |
| Direct                                                                            | DIR-01                                   | DIR-01                                                                              | DIR-01                                   | DIR-01                                   | DIR-01                                   |
| Short Selector/NEMA 1, 3R, 4, 4X, 12                                              | H4X-01B<br>H4X-01R<br>H4X-02B<br>H4X-02R | H4X-01B<br>H4X-01R<br>H4X-02B<br>H4X-02R                                            | H4X-01B<br>H4X-01R<br>H4X-02B<br>H4X-02R | H4X-01B<br>H4X-01R<br>H4X-02B<br>H4X-02R | H4X-01B<br>H4X-01R<br>H4X-02B<br>H4X-02R |
| Long Selector/NEMA 1, 3R, 4, 4X, 12                                               |                                          |                                                                                     |                                          |                                          |                                          |
| Shafts - 5x5mm                                                                    |                                          |                                                                                     |                                          |                                          |                                          |
| 5.9"/150mm                                                                        | SH4-150                                  | SH4-150                                                                             | SH4-150                                  | SH4-150                                  | SH4-150                                  |
| 7.9"/200mm                                                                        | SH4-200                                  | SH4-200                                                                             | SH4-200                                  | SH4-200                                  | SH4-200                                  |
| 12.6"/320mm                                                                       | SH4-320                                  | SH4-320                                                                             | SH4-320                                  | SH4-320                                  | SH4-320                                  |
| Shaft Guide                                                                       | SH-GUIDE1                                | SH-GUIDE1                                                                           | SH-GUIDE1                                | SH-GUIDE1                                | SH-GUIDE1                                |
| Door Mount Kit                                                                    | DOOR-508                                 | DOOR-508                                                                            | DOOR-508                                 | DOOR-508                                 | DOOR-508                                 |
| Shrouds/Switch Amps                                                               |                                          |                                                                                     |                                          |                                          |                                          |
| 1-Pole                                                                            | TSH1-1TB                                 | TSH1-1TB                                                                            | TSH1-1TB                                 | TSH2-3TB                                 | TSH2-3TB                                 |
| 3-Pole (Loadside and Lineside)                                                    | TSH1-3TB                                 | TSH1-3TB                                                                            | TSH1-3TB                                 | —                                        | —                                        |
| Switched 4 <sup>th</sup> Pole/Switch Amps                                         | POLE-16                                  | POLE-25                                                                             | POLE-40                                  |                                          |                                          |
| Auxiliary Contacts                                                                |                                          |                                                                                     |                                          |                                          |                                          |
| NO + NC (1 ea.)                                                                   | BAC01                                    | BAC01                                                                               | BAC01                                    | BAC01                                    | BAC01                                    |
| (2) NO                                                                            | BAC02                                    | BAC02                                                                               | BAC02                                    | BAC02                                    | BAC02                                    |
| AC Ratings                                                                        |                                          |                                                                                     |                                          |                                          |                                          |
| Volts                                                                             | 240Vac                                   | 240Vac                                                                              | 240Vac                                   | 240Vac                                   | 240Vac                                   |
| Amps                                                                              | 10A                                      | 10A                                                                                 | 10A                                      | 10A                                      | 10A                                      |
| 6-/8-Pole Conversion Kit                                                          |                                          |                                                                                     |                                          |                                          |                                          |
| Gangs two switches of same rating, 16-80A switch amps                             | KIT-6POLE                                | KIT-6POLE                                                                           | KIT-6POLE                                | KIT-6POLE                                | KIT-6POLE                                |
| — Not available.                                                                  |                                          |                                                                                     |                                          |                                          |                                          |

Disconnect  
Switches

## UL 508 Non-Fused Rotary Disconnect Switches—16, 25, 40, 63 and 80A

For a Complete Assembly, Please Select:
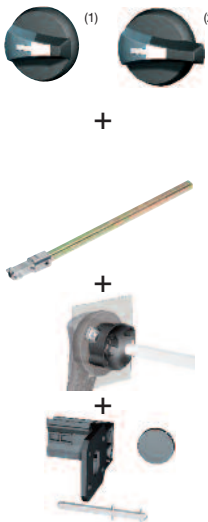
|                                                                                                                                                                                                                                 |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------|----------------------------|-----------------------|------------------|---------------------------------------|---------------|----|----|---------------------------------------------------------------|------------------------|-------------|
| SWITCH                                                                                                                                                                                                                          |    | Switch                                                                  |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | Switch Amp Rating                                                       | No. of Poles               | SCCR @600V            | Max Class J Fuse | Max Horsepower Rating, 3-Ph           |               |    |    | Wire Size                                                     | Wire Type              | Part Number |
|                                                                                                                                                                                                                                 |                                                                                     | 16                                                                      | 3                          | 65kA                  | 30A              | 3                                     | 5             | 10 | 10 | #14-#10 Sol<br>Dual #12 Sol<br>#14-#4 Str<br>Dual #14-#12 Str | 75°C Cu                | RD16-3-508  |
|                                                                                                                                                                                                                                 |                                                                                     | 25                                                                      | 3                          | 65kA                  | 30A              | 7.5                                   | 7.5           | 15 | 20 | #14-#10 Sol<br>Dual #12 Sol<br>#14-#4 Str<br>Dual #14-#12 Str | 75°C Cu                | RD25-3-508  |
|                                                                                                                                                                                                                                 |                                                                                     | 40                                                                      | 3                          | 10kA<br>65kA          | 60A<br>30A       | 7.5                                   | 7.5           | 20 | 25 | #14-#10 Sol<br>Dual #12 Sol<br>#14-#4 Str<br>Dual #14-#12 Str | 75°C Cu                | RD40-3-508  |
|                                                                                                                                                                                                                                 |                                                                                     | 63                                                                      | 3                          | 50kA<br>65kA          | 100A<br>60A      | 15                                    | 20            | 40 | 40 | #14-#10 Sol<br>Dual #12 Sol<br>#14-#1 Str<br>Dual #10-#6 Str  | 75°C Cu                | RD63-3-508  |
|                                                                                                                                                                                                                                 |                                                                                     | 80                                                                      | 3                          | 50kA<br>65kA          | 100A<br>60A      | 15                                    | 20            | 40 | 40 | #14-#10 Sol<br>Dual #12 Sol<br>#14-#1 Str<br>Dual #10-#6 Str  | 75°C Cu                | RD80-3-508  |
| +                                                                                                                                                                                                                               |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| HANDLE                                                                                                                                                                                                                          |   | Direct Mount Handle - mounts directly to switch, no shaft required      |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | For Switch Part Number                                                  | Color                      |                       |                  | Test Function                         | Padlockable   |    |    |                                                               | Part Number            |             |
|                                                                                                                                                                                                                                 |                                                                                     | All Switches                                                            | Black                      |                       |                  | N                                     | Y - On Switch |    |    |                                                               | DIR-01                 |             |
| OR                                                                                                                                                                                                                              |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| HANDLE                                                                                                                                                                                                                          |  | External Front or Right Side Operated Selector Handles - shaft required |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | NEMA Type                                                               | Color                      | Handle Length         | Test Function    | Padlockable                           | Defeatable    |    |    |                                                               | Part Number            |             |
|                                                                                                                                                                                                                                 |                                                                                     | 1, 3R, 4, 4X, 12                                                        | Black                      | Short                 | N                | Y                                     | Y             |    |    |                                                               | H4X-01B <sup>(1)</sup> |             |
|                                                                                                                                                                                                                                 |                                                                                     | 1, 3R, 4, 4X, 12                                                        | Red/Yellow                 | Short                 | N                | Y                                     | Y             |    |    |                                                               | H4X-01R <sup>(1)</sup> |             |
|                                                                                                                                                                                                                                 |                                                                                     | 1, 3R, 4, 4X, 12                                                        | Black                      | Long                  | N                | Y                                     | Y             |    |    |                                                               | H4X-02B <sup>(2)</sup> |             |
|                                                                                                                                                                                                                                 |                                                                                     | 1, 3R, 4, 4X, 12                                                        | Red/Yellow                 | Long                  | N                | Y                                     | Y             |    |    |                                                               | H4X-02R <sup>(2)</sup> |             |
|                                                                                                                                                                                                                                 |                                                                                     | Shafts for Selector Handles - required for 12.6" (320mm) shafts         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | Length in (mm)                                                          | Mounting Depth (X) in (mm) |                       |                  |                                       |               |    |    |                                                               | Part Number            |             |
|                                                                                                                                                                                                                                 |                                                                                     | 5.9 (150)                                                               | 3.50-7.60 (89-193)         |                       |                  |                                       |               |    |    |                                                               | SH4-150                |             |
|                                                                                                                                                                                                                                 |                                                                                     | 7.9 (200)                                                               | 3.50-9.50 (89-241)         |                       |                  |                                       |               |    |    |                                                               | SH4-200                |             |
|                                                                                                                                                                                                                                 |                                                                                     | 12.6 (320)                                                              | 3.50-14.9 (89-378)         |                       |                  |                                       |               |    |    |                                                               | SH4-320                |             |
|                                                                                                                                                                                                                                 |                                                                                     | Shaft Guide                                                             |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               | Part Number            |             |
| Required for 12.6" (320mm) long shafts, optional for other lengths.                                                                                                                                                             |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| SH-GUIDE1                                                                                                                                                                                                                       |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| Door Mount Kit - for mounting switch on the right side of the enclosure or directly on the enclosure door using switch side operation shaft location. Kit includes a shaft. <i>Order switch and selector handle separately.</i> |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| Switch Rating                                                                                                                                                                                                                   |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| Part Number                                                                                                                                                                                                                     |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| All Switches - kit includes shaft                                                                                                                                                                                               |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| DOOR-508                                                                                                                                                                                                                        |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| and ...                                                                                                                                                                                                                         |                                                                                     |                                                                         |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
| Acc. AUX CONTACTS                                                                                                                                                                                                               |  | Auxiliary Contacts                                                      |                            |                       |                  |                                       |               |    |    |                                                               |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | Contact Type                                                            | Number of Contacts         | Continuous Amp Rating | Voltage Rating   | Max Number of Aux Contacts per Switch |               |    |    | Part Number                                                   |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | NO + NC                                                                 | 1 Ea                       | 10A                   | 240Vac           | 4                                     |               |    |    | BAC01                                                         |                        |             |
|                                                                                                                                                                                                                                 |                                                                                     | NO                                                                      | 2                          | 10A                   | 240Vac           | 4                                     |               |    |    | BAC02                                                         |                        |             |



Auxiliary Contact Configurations

# UL 508 Non-Fused Rotary Disconnect Switches—16, 25, 40, 63 and 80A

Accessories

SHROUDS



| Terminal Shrouds - includes terminal shroud for both lineside <i>and</i> loadside |                                       |                       |             |
|-----------------------------------------------------------------------------------|---------------------------------------|-----------------------|-------------|
| Switch Amp Rating                                                                 | Number of Poles                       | Location on Switch    | Part Number |
| 16-40A                                                                            | 1 (for switched 4 <sup>th</sup> pole) | Lineside and Loadside | TSH1-1TB    |
| 16-40A                                                                            | 3                                     | Lineside and Loadside | TSH1-3TB    |
| 63-80A                                                                            | 3                                     | Lineside and Loadside | TSH2-3TB    |

and ...

SW. 4<sup>TH</sup> POLE



| Switched 4 <sup>th</sup> Pole - converts 3-pole switch to 4-pole switch |  |             |
|-------------------------------------------------------------------------|--|-------------|
| Switch Amp Rating                                                       |  | Part Number |
| 16                                                                      |  | POLE-16     |
| 25                                                                      |  | POLE-25     |
| 40                                                                      |  | POLE-40     |

and ...

6-POLE KIT



| 6-Pole Conversion Kit - creates a 6-pole switch by ganging two 3-pole switches of equal rating |  |             |
|------------------------------------------------------------------------------------------------|--|-------------|
| Switch Amp Rating                                                                              |  | Part Number |
| All Switches                                                                                   |  | KIT-6POLE*  |

\* Kit ships with a direct handle. If external handle is needed order a selector handle *and* shaft for the UL 508 Rotary Disconnect Switches.

Note: To create an 8-pole switch from 16 to 40 amp switches, use two 3-pole switches of equal ratings plus two switched 4<sup>th</sup> poles (part # POLE-).

Order switches separately.


Disconnect  
Switches



Switched 4<sup>th</sup> Pole  
Configurations.


## Dimensions – in (mm)

### Direct Handle Operation

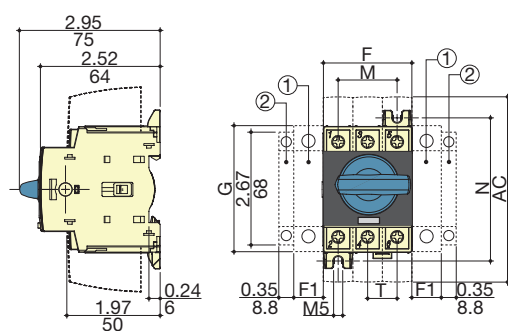


1. Position for 1 switched 4<sup>th</sup> pole (1 per device max.) or 1 auxiliary contact.
  2. Position for 1 auxiliary contact only.
- Note: Maximum of 4 auxiliary contacts, or 3 auxiliary contacts + one switched 4<sup>th</sup> pole.

### External Front Operation

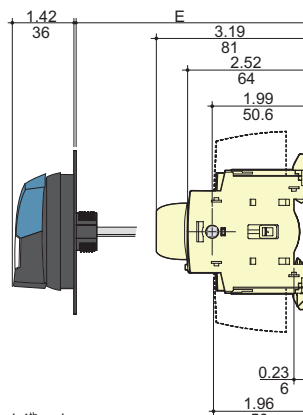

### External Side Operation

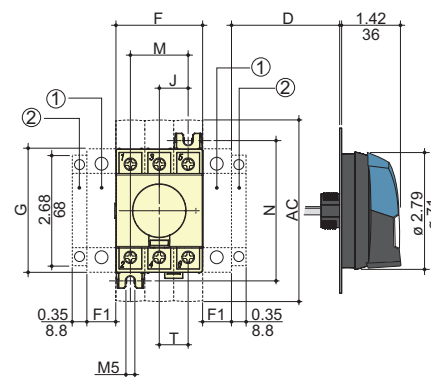


| Switch<br>Rating (A) | Overall<br>Dimensions |               |               |                | Terminal<br>Shroud<br>AC | Switch<br>Body |                |              |                | Switch<br>Mounting |              | Connection<br>T |
|----------------------|-----------------------|---------------|---------------|----------------|--------------------------|----------------|----------------|--------------|----------------|--------------------|--------------|-----------------|
|                      | D min                 | D max         | E min         | E max          |                          | F              | F1             | G            | J              | M                  | N            |                 |
| 16 to 40             | 1.18<br>(30)          | 9.25<br>(235) | 3.94<br>(100) | 14.64<br>(372) | 4.33<br>(110)            | 1.77<br>(45)   | 0.59<br>(15)   | 2.67<br>(68) | 0.59<br>(15)   | 1.18<br>(30)       | 2.95<br>(75) | 0.59<br>(15)    |
| 63 to 80             | 1.18<br>(30)          | 9.25<br>(235) | 3.93<br>(100) | 14.64<br>(372) | 4.33<br>(110)            | 2.06<br>(52.5) | 0.69<br>(17.5) | 2.99<br>(76) | 0.69<br>(17.5) | 1.38<br>(35)       | 3.35<br>(85) | 0.69<br>(17.5)  |




## UL 508 Non-Fused Rotary Disconnect Switches—16, 25, 40, 63 and 80A

### Dimensions – in (mm)

#### Direct Front Operation for 6/8-Pole Disconnects

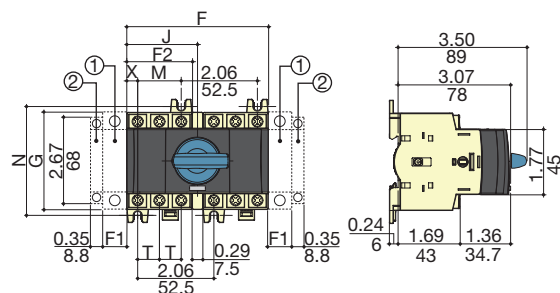

#### External Front Operation for 6/8-Pole Disconnects

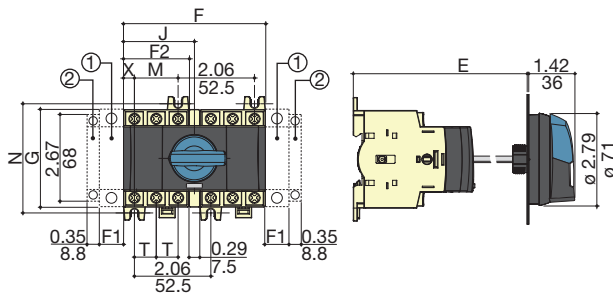


1. Position for 1 switched 4<sup>th</sup> pole (1 per device max.) or 1 auxiliary contact.  
2. Position for 1 auxiliary contact only.  
Note: Maximum of 4 auxiliary contacts, or 3 auxiliary contacts + one switched 4<sup>th</sup> pole.


| Switch Rating (A) | Overall Dimensions |             |             | Switch Body |             |           |              | Switch Mounting |           | Connection  |             |
|-------------------|--------------------|-------------|-------------|-------------|-------------|-----------|--------------|-----------------|-----------|-------------|-------------|
|                   | E min              | E max       | F           | F1          | F2          | G         | J            | M               | N         | T           | X           |
| 16 to 40          | 4.13 (105)         | 14.64 (372) | 3.83 (97.5) | 0.59 (15)   | 1.77 (45)   | 2.67 (68) | 1.92 (48.75) | 1.18 (30)       | 2.95 (75) | 0.59 (15)   | 0.29 (7.5)  |
| 63 to 80          | 4.13 (105)         | 14.65 (372) | 4.13 (105)  | 0.69 (17.5) | 2.06 (52.5) | 2.99 (76) | 2.06 (52.5)  | 1.38 (35)       | 3.35 (85) | 0.69 (17.5) | 0.34 (8.75) |

### External Selector Handles


#### Handle Type

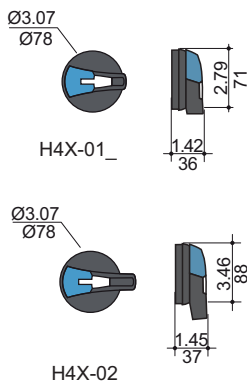


#### Direction of Front Operation



#### Direction of Right Side Operation



#### Door Drilling Layouts

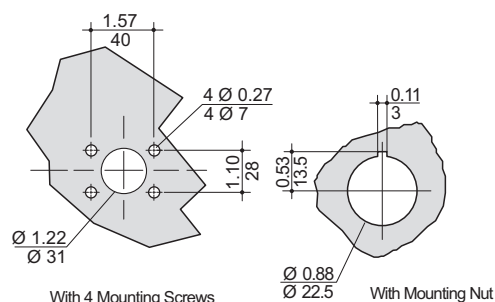

# UL 98 & UL 508 Enclosed Disconnect Switches

## Description

Fused and non-fused enclosed Rotary Disconnect Switches from 16 to 1200A in NEMA 1, 3R, 4, 4X, 12 enclosures.

## Features

- UL 98 Listed for general purpose, main disconnect, or branch circuit protection up to 600Vac/dc
- UL 508 Listed for motor disconnect applications up to 600Vac
- Multiple field installed accessories enhance the enclosed disconnect switches to fit the desired application
- Lockout/tagout: Up to three 1/4" shank padlocks can be installed on external handles

## Ratings:

- Volts: 600Vac  
250-600Vdc\*
- Amps: 16-1200A
- Short-Circuit Current Ratings: UL 98: 25kA-200kA  
UL 508: 10kA-65kA

\*Some non-fused disconnect switches are not rated for DC applications.

## Specifications

- Operating temperature: -20°C to 70°C
- 4X Plastic Enclosure Flammability Rating:  
Polycarbonate UL 94-5VA-0  
Fiberglass UL 94-5V

## Agency Information

- UL 98 Listed: File E182262, Guide WIAAX, WIAAX7
- UL 508 Listed: File E155129, Guide NLRV, NLRV7
- cULus Listed to CSA Standard 22.2, No. 14
- cULus Listed to CSA Standard 22.2, No. 4
- Conforms with IEC 60947-3
- CE Compliant
- RoHS Compliant

## Field Installed Accessories

- Auxiliary contacts
- Terminal shrouds

## Online Resources

Visit [www.cooperbussmann.com/Disconnects](http://www.cooperbussmann.com/Disconnects) for:

- CAD Drawings
- Instruction Sheets
- UL Information



NEMA 1, 3R, 4 & 12



NEMA 4X  
Stainless Steel



NEMA 4X  
Polycarbonate  
or Fiberglass

**QuikShip**   
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Bussmann representative for details.

Disconnect  
Switches

### Available Bussmann Fuses

| Class | Type                               | Data Sheet #   |
|-------|------------------------------------|----------------|
| CC    | LP-CC Time-Delay, Current Limiting | 1023           |
| CC    | FNQ-R Time-Delay                   | 1014           |
| CC    | KTK-R Fast-Acting                  | 1015           |
| J     | LPJ Time-Delay, Current Limiting   | 1006 (0-60A)   |
| J     |                                    | 1007 (70-600A) |
| J     | With easyID™ open fuse indication  | 1062 (6-60A)   |
| J     |                                    | 1063 (70-600A) |
| J     | JKS Fast-Acting Fuses              | 1026 (0-60A)   |
| J     |                                    | 1027 (70-600A) |
| J     | DFJ High Speed Drive Fuse          | 1048 (0-600A)  |
| L     | KRP-C Time-Delay, Current Limiting | 1008           |
| L     | KTU Fast-Acting                    | 1010           |
| L     | KLU Time-Delay                     | 1013           |

## UL 98 Enclosed Fused Disconnects—30 to 800A

### 3-Pole UL 98 600Vac

**Part Number System:** **ER** **4X** - **60** **J** **3** **P** **B**

ER — Enclosed Rotary Disconnect

NEMA Rating — 1, 3R, 4, 4X (SST), 4P (4X Plastic), 12


Amp Rating — 30, 60, 100, 200, 400, 600, 800

Fuse Class — J = Class J, L = Class L

Number of Poles — 3 = 3-Pole

Handle Type — P = Pistol

Handle Color — B = Black, R = Red

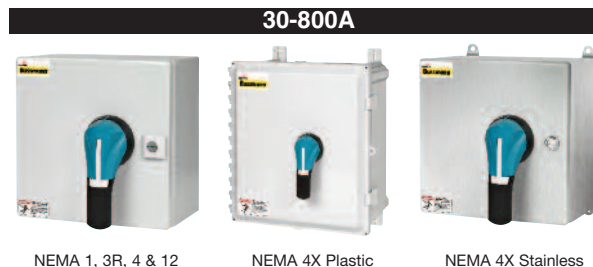

**Part Numbers** - All part numbers provided with integral or installed lugs and a black selector handle.  
Order red/yellow handle by changing the suffix “B” to “R.”

| UL General Purpose Amp Rating | Fuse Type | NEMA Enclosure Type & Part Number |              |             |                           |              |              |
|-------------------------------|-----------|-----------------------------------|--------------|-------------|---------------------------|--------------|--------------|
|                               |           | 1                                 | 3R           | 4           | 4X Plastic <sup>(1)</sup> | 4X Stainless | 12           |
| 30                            | J         | ER1-30J3PB                        | ER3R-30J3PB  | ER4-30J3PB  | ER4P-30J3PB               | ER4X-30J3PB  | ER12-30J3PB  |
| 60                            | J         | ER1-60J3PB                        | ER3R-60J3PB  | ER4-60J3PB  | ER4P-60J3PB               | ER4X-60J3PB  | ER12-60J3PB  |
| 100                           | J         | ER1-100J3PB                       | ER3R-100J3PB | ER4-100J3PB | ER4P-100J3PB              | ER4X-100J3PB | ER12-100J3PB |
| 200                           | J         | ER1-200J3PB                       | ER3R-200J3PB | ER4-200J3PB | ER4P-200J3PB              | ER4X-200J3PB | ER12-200J3PB |
| 400                           | J         | ER1-400J3PB                       | ER3R-400J3PB | ER4-400J3PB | ER4P-400J3PB              | ER4X-400J3PB | ER12-400J3PB |
| 600                           | J         | ER1-600J3PB                       | ER3R-600J3PB | ER4-600J3PB | ER4P-600J3PB              | ER4X-600J3PB | ER12-600J3PB |
| 800                           | L         | ER1-800L3PB                       | ER3R-800L3PB | ER4-800L3PB | ER4P-800L3PB              | ER4X-800L3PB | ER12-800L3PB |


(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

**Switch Ratings** - for wire types, ranges and tightening torques, see table on page 387

| Switch Amp Rating | Disconnect Switch | Fuse Type | No. of Poles | Voltage |     | SCCR @ Vac | Max Hp Rating @ 600Vac |
|-------------------|-------------------|-----------|--------------|---------|-----|------------|------------------------|
|                   |                   |           |              | Vac     | Vdc |            |                        |
| 30                | RDF30J-3          | J         | 3            | 600     | 250 | 200kA      | 20                     |
| 60                | RDF60J-3          | J         |              |         |     |            | 50                     |
| 100               | RDF100J-3         | J         |              |         |     |            | 75                     |
| 200               | RDF200J-3         | J         |              |         |     |            | 150                    |
| 400               | RDF400J-3         | J         |              |         |     |            | 350                    |
| 600               | RDF600J-3         | J         |              |         |     |            | 500                    |
| 800               | RDF800L-3         | L         |              |         | 600 |            |                        |

# UL 98 Enclosed Fused Disconnects—30 to 800A

## Enclosure Weights - Lbs & Dimensions - in

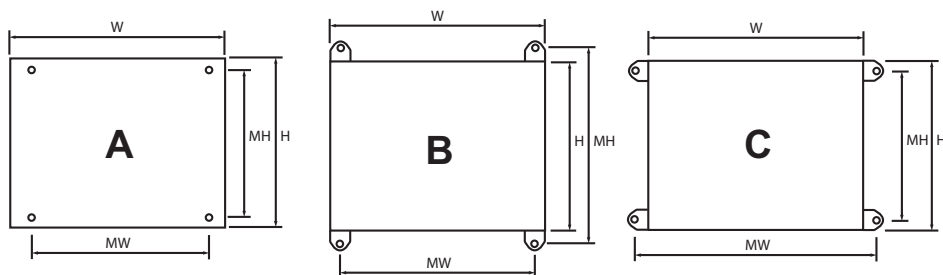

| Part Number Family | Amp Rating | Fuse Type | NEMA Enclosure Type       | H x W x D | Mounting Centers H x W |           |            | Weight Lbs |
|--------------------|------------|-----------|---------------------------|-----------|------------------------|-----------|------------|------------|
|                    |            |           |                           |           | A                      | B         | C          |            |
| ER_-30J            | 30         | J         | 1, 3R, 4, 12              | 10x10x6   | 8.3x8.3                |           |            | 15         |
|                    |            |           | 4X-SST                    | 10x10x6   |                        | 9.5x8.3   | 8.3x9.5    | 15         |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 12x10x6   |                        | 12x5.6    | 7.64x10    | 8          |
| ER_-60J            | 60         | J         | 1, 3R, 4, 12              | 12x10x6   | 10.3x8.3               |           |            | 19         |
|                    |            |           | 4X-SST                    | 12x10x6   |                        | 11.5x8.3  | 10.3x9.5   | 19         |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 13x13x6   |                        | 14x7.6    | 9.6x12     | 11         |
| ER_-100J           | 100        | J         | 1, 3R, 4, 12              | 14x12x6   | 12.3x10.3              |           |            | 21         |
|                    |            |           | 4X-SST                    | 14x12x6   |                        | 13.5x10.3 | 12.3x11.5  | 21         |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 13x13x6   |                        | 14x7.6    | 9.6x12     | 12         |
| ER_-200J           | 200        | J         | 1, 3R, 4, 12              | 24x20x8   | 22x18.1                |           |            | 55         |
|                    |            |           | 4X-SST                    | 24x20x8   |                        | 23.2x18.1 | 22x19.3    | 55         |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 27x21x10  |                        | 25.75x14  |            | 39         |
| ER_-400J           | 400        | J         | 1, 3R, 4, 12              | 48x36x12  | 45.75x34.9             |           |            | 188        |
|                    |            |           | 4X-SST                    | 48x36x12  |                        | 46.9x34.9 | 45.75x36.1 | 188        |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 51x37x14  |                        | 50.1x28.5 |            | 186        |
| ER_-600J           | 600        | J         | 1, 3R, 4, 12              | 48x36x12  | 45.75x34.9             |           |            | 216        |
|                    |            |           | 4X-SST                    | 48x36x12  |                        | 46.9x34.9 | 45.75x36.1 | 216        |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 51x37x14  |                        | 50.1x28.5 |            | 214        |
| ER_-800L           | 800        | L         | 1, 3R, 4, 12              | 48x36x12  | 45.75x34.9             |           |            | 216        |
|                    |            |           | 4X-SST                    | 48x36x12  |                        | 46.9x34.9 | 45.75x36.1 | 216        |
|                    |            |           | 4X-Plastic <sup>(1)</sup> | 51x37x14  |                        | 50.1x28.5 |            | 214        |

(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

## Available Field-Installed Accessories - Order Separately

|  | Auxiliary Contacts - for 30 to 800 Amp Switches |                    |                       |                |                                       |             |
|-------------------------------------------------------------------------------------|-------------------------------------------------|--------------------|-----------------------|----------------|---------------------------------------|-------------|
|                                                                                     | Contact Type                                    | Number of Contacts | Continuous Amp Rating | Voltage Rating | Max Number of Aux Contacts per Switch | Part Number |
|                                                                                     | NO                                              | 1                  | 10A                   | 600Vac         | 30 to 200A: 4                         | BAC05       |
|                                                                                     | NC                                              | 1                  | 10A                   | 600Vac         | 400 to 800A: 8                        | BAC06       |

|  | Terminal Shrouds - for 200 to 800 Amp Switches - includes terminal shroud for lineside or loadside |                 |  |             |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------|--|-------------|
|                                                                                     | Switch Amp Rating                                                                                  | Number of Poles |  | Part Number |
|                                                                                     | 200                                                                                                | 3               |  | TSH8-3TB    |
|                                                                                     | 400                                                                                                | 3               |  | TSH9-3TB    |
|                                                                                     | 600-800                                                                                            | 3               |  | TSH10-3TB   |

## UL 98 Enclosed Non-Fused Disconnects—30 to 1200A

### 3-Pole UL 98 600Vac

**Part Number System:** **ER** **4X** - **60** **N** **3** **S** **B**

ER — Enclosed Rotary Disconnect

NEMA Rating — 1, 3R, 4, 4X (SST), 4P (4X Plastic), 12

Amp Rating — 30, 60, 100, 200, 400, 600, 800, 1200

N = Non-Fused

Number of Poles — 3 = 3-Pole

Handle Type\* — P = Pistol, S = Selector

Handle Color — B = Black, R = Red

\* ≤100A = Selector only, ≥200A = Pistol only.

#### 30-100A



NEMA 1, 3R, 4 & 12



NEMA 4X



NEMA 4X Stainless

#### 200-1200A



NEMA 1, 3R, 4 & 12



NEMA 4X



NEMA 4X Stainless

**Part Numbers** - All part numbers provided with integral or installed lugs and a black selector handle.  
Order red/yellow handle by changing the suffix "B" to "R."

| UL General Purpose Amp Rating | NEMA Enclosure Type & Part Number |               |              |                           |               |               |
|-------------------------------|-----------------------------------|---------------|--------------|---------------------------|---------------|---------------|
|                               | 1                                 | 3R            | 4            | 4X Plastic <sup>(1)</sup> | 4X Stainless  | 12            |
| 30                            | ER1-30N3SB                        | ER3R-30N3SB   | ER4-30N3SB   | ER4P-30N3SB               | ER4X-30N3SB   | ER12-30N3SB   |
| 60                            | ER1-60N3SB                        | ER3R-60N3SB   | ER4-60N3SB   | ER4P-60N3SB               | ER4X-60N3SB   | ER12-60N3SB   |
| 100                           | ER1-100N3SB                       | ER3R-100N3SB  | ER4-100N3SB  | ER4P-100N3SB              | ER4X-100N3SB  | ER12-100N3SB  |
| 200                           | ER1-200N3PB                       | ER3R-200N3PB  | ER4-200N3PB  | ER4P-200N3PB              | ER4X-200N3PB  | ER12-200N3PB  |
| 400                           | ER1-400N3PB                       | ER3R-400N3PB  | ER4-400N3PB  | ER4P-400N3PB              | ER4X-400N3PB  | ER12-400N3PB  |
| 600                           | ER1-600N3PB                       | ER3R-600N3PB  | ER4-600N3PB  | ER4P-600N3PB              | ER4X-600N3PB  | ER12-600N3PB  |
| 800                           | ER1-800N3PB                       | ER3R-800N3PB  | ER4-800N3PB  | ER4P-800N3PB              | ER4X-800N3PB  | ER12-800N3PB  |
| 1200                          | ER1-1200N3PB                      | ER3R-1200N3PB | ER4-1200N3PB | N/A                       | ER4X-1200N3PB | ER12-1200N3PB |


(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

**Switch Ratings** - for wire types, ranges and tightening torques, see table on page 405

| Switch<br>Amp Rating             | Disconnect<br>Switch | No. of<br>Poles | Voltage |     | SCCR<br>@ Vac | Max Hp Rating<br>@ 600Vac |     |
|----------------------------------|----------------------|-----------------|---------|-----|---------------|---------------------------|-----|
|                                  |                      |                 | Vac     | Vdc |               |                           |     |
| 30                               | RD30-3               | 3               | 600     | N/A | 100kA         | 25                        |     |
| 60                               | RD60-3               |                 |         |     | 25kA/100kA*   | 50                        |     |
| 100                              | RD100-3              |                 |         |     |               | 200                       |     |
| 200                              | RD200-3              |                 |         | 250 | 200kA         | 350                       |     |
| 400                              | RD400-3              |                 |         |     | N/A           | 100kA                     | 500 |
| 600                              | RD600-3              |                 |         |     |               |                           |     |
| 800                              | RD800-3              |                 |         |     |               |                           |     |
| 1200                             | RD1200-3             |                 |         |     |               |                           |     |
| * 25kA @ 600Vac, 100kA @ 480Vac. |                      |                 |         |     |               |                           |     |

# UL 98 Enclosed Non-Fused Disconnects—30 to 1200A

## Enclosure Weights - Lbs & Dimensions - in

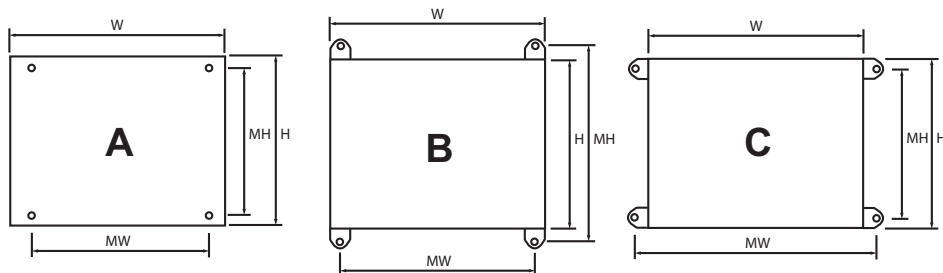

| Part Number Family | Amp Rating | NEMA Enclosure Type       | H x W x D | Mounting Centers H x W |           |           | Weight Lbs |
|--------------------|------------|---------------------------|-----------|------------------------|-----------|-----------|------------|
|                    |            |                           |           | A                      | B         | C         |            |
| ER_-30             | 30         | 1, 3R, 4, 12              | 10x8x6    | 8.3x6.3                |           |           | 11         |
|                    |            | 4X-SST                    | 10x8x6    |                        | 9.5x6.3   | 8.3x7.5   | 11         |
|                    |            | 4X-Plastic <sup>(1)</sup> | 9x9x6     |                        | 10x3.6    | 5.6x8     | 5          |
| ER_-60             | 60         | 1, 3R, 4, 12              | 10x8x6    | 8.3x6.3                |           |           | 12         |
|                    |            | 4X-SST                    | 10x8x6    |                        | 9.5x6.3   | 8.3x7.5   | 12         |
|                    |            | 4X-Plastic <sup>(1)</sup> | 9x9x6     |                        | 10x3.6    | 5.6x8     | 5          |
| ER_-100            | 100        | 1, 3R, 4, 12              | 12x10x6   | 10.3x8.3               |           |           | 12         |
|                    |            | 4X-SST                    | 12x10x6   |                        | 11.5x8.3  | 0.3x9.5   | 12         |
|                    |            | 4X-Plastic <sup>(1)</sup> | 13x13x6   |                        | 14x7.6    | 9.6x12    | 8          |
| ER_-200            | 200        | 1, 3R, 4, 12              | 20x16x8   | 18.1x14.2              |           |           | 39         |
|                    |            | 4X-SST                    | 20x16x8   |                        | 19.3x14.2 | 18.1x15.4 | 39         |
|                    |            | 4X-Plastic <sup>(1)</sup> | 23x17x12  |                        | 21.5x10.1 |           | 31         |
| ER_-400            | 400        | 1, 3R, 4, 12              | 36x30x8   | 33.9x28.3              |           |           | 122        |
|                    |            | 4X-SST                    | 36x30x8   |                        | 35.1x28.3 | 33.9x29.5 | 122        |
|                    |            | 4X-Plastic <sup>(1)</sup> | 40x32x14  |                        | 38.1x23.9 |           | 103        |
| ER_-600            | 600        | 1, 3R, 4, 12              | 48x36x12  | 45.8x34.9              |           |           | 209        |
|                    |            | 4X-SST                    | 48x36x12  |                        | 47x34.9   | 45.8x36.1 | 209        |
|                    |            | 4X-Plastic <sup>(1)</sup> | 51x37x 14 |                        | 50.1x28.5 |           | 187        |
| ER_-800            | 800        | 1, 3R, 4, 12              | 48x36x12  | 45.8x34.9              |           |           | 211        |
|                    |            | 4X-SST                    | 48x36x12  |                        | 47x34.9   | 45.8x36.1 | 211        |
|                    |            | 4X-Plastic <sup>(1)</sup> | 51x37x 14 |                        | 50.1x28.5 |           | 189        |
| ER_-1200           | 1200       | 1, 3R, 4, 12              | 60x36x16  | 57.5x33.9              |           |           | 268        |
|                    |            | 4X-SST                    | 60x36x16  |                        | 58.7x33.9 | 57.5x35.1 | 268        |

(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

## Available Field-Installed Accessories - Order Separately

|                                                                                     | Auxiliary Contacts - for 30 to 1200 Amp Switches                                                                                 |              |                    |                       |                |                                       |             |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------|-----------------------|----------------|---------------------------------------|-------------|
|                                                                                     | Switch Amp Rating                                                                                                                | Contact Type | Number of Contacts | Continuous Amp Rating | Voltage Rating | Max Number of Aux Contacts per Switch | Part Number |
|  | 30-100                                                                                                                           | NO + NC      | 1 of each          | 10A                   | 240Vac         | 4                                     | BAC01       |
|                                                                                     | 30-100                                                                                                                           | NC           | 2                  | 10A                   | 240Vac         | 4                                     | BAC02       |
|                                                                                     | 100-1200                                                                                                                         | NO + NC      | 1 of each          | 10.1A                 | 125-250Vac     | 2                                     | BAC03*      |
|                                                                                     | 100-1200                                                                                                                         | NO + NC      | 1 of each          | 10.1A                 | 125-250Vac     | 2                                     | BAC04*      |
|                                                                                     | 100-1200                                                                                                                         | NO + NC      | 1 of each          | 1A                    | 125Vac         | 2                                     | BAC11*      |
|                                                                                     | 100-1200                                                                                                                         | NO + NC      | 1 of each          | 1A                    | 125Vac         | 2                                     | BAC12*      |
|                                                                                     | * For one auxiliary contact, install either BAC03 or BAC11. For two auxiliary contacts, install BAC03 + BAC04, or BAC11 + BAC12. |              |                    |                       |                |                                       |             |

|  | Terminal Shrouds - for 200 to 800 Amp Switches |                 |                       |             |
|-------------------------------------------------------------------------------------|------------------------------------------------|-----------------|-----------------------|-------------|
|                                                                                     | Switch Amp Rating                              | Number of Poles | Location on Switch    | Part Number |
|                                                                                     | 30-100                                         | 3               | Lineside and Loadside | TSH3-3TB    |
|                                                                                     | 200A                                           | 3               | Lineside              | TSH4-3T     |
|                                                                                     | 200A                                           | 3               | Loadside              | TSH4-3B     |
|                                                                                     | 400A                                           | 3               | Lineside              | TSH5-3T     |
|                                                                                     | 400A                                           | 3               | Loadside              | TSH5-3B     |
|                                                                                     | 600A                                           | 3               | Lineside or Loadside  | TSH6-3TB    |
|                                                                                     | 800-1200A                                      | 3               | Lineside or Loadside  | TSH7-3TB    |



## UL 508 Enclosed Non-Fused Disconnects—16 to 80A

### 3-/6-Pole UL 508 600Vac

**Part Number System:** **ER** **4X** - **63** **N** **6** **S** **B**

ER — Enclosed Rotary Disconnect

NEMA Rating — 1, 3R, 4, 4X (SST), 4P (4X Plastic), 12

Amp Rating — 16, 25, 40, 63, 80

N = Non-Fused

Number of Poles — 3 = 3-Pole, 6 = 6-Pole

Handle Type — S = Selector

Handle Color — B = Black, R = Red

### 16-80A



NEMA 1, 3R, 4 & 12



NEMA 4X Plastic



NEMA 4X Stainless

**Part Numbers** - All part numbers provided with a black selector handle. Order red/yellow handle by changing the suffix "B" to "R."

| UL General Purpose Amp Rating | No. of Poles | NEMA Enclosure Type & Part Number |             |            |                           |              |             |
|-------------------------------|--------------|-----------------------------------|-------------|------------|---------------------------|--------------|-------------|
|                               |              | 1                                 | 3R          | 4          | 4X Plastic <sup>(1)</sup> | 4X Stainless | 12          |
| 16                            | 3            | ER1-16N3SB                        | ER3R-16N3SB | ER4-16N3SB | ER4P-16N3SB               | ER4X-16N3SB  | ER12-16N3SB |
|                               | 6            | ER1-16N6SB                        | ER3R-16N6SB | ER4-16N6SB | ER4P-16N6SB               | ER4X-16N6SB  | ER12-16N6SB |
| 25                            | 3            | ER1-25N3SB                        | ER3R-25N3SB | ER4-25N3SB | ER4P-25N3SB               | ER4X-25N3SB  | ER12-25N3SB |
|                               | 6            | ER1-25N6SB                        | ER3R-25N6SB | ER4-25N6SB | ER4P-25N6SB               | ER4X-25N6SB  | ER12-25N6SB |
| 40                            | 3            | ER1-40N3SB                        | ER3R-40N3SB | ER4-40N3SB | ER4P-40N3SB               | ER4X-40N3SB  | ER12-40N3SB |
|                               | 6            | ER1-40N6SB                        | ER3R-40N6SB | ER4-40N6SB | ER4P-40N6SB               | ER4X-40N6SB  | ER12-40N6SB |
| 63                            | 3            | ER1-63N3SB                        | ER3R-63N3SB | ER4-63N3SB | ER4P-63N3SB               | ER4X-63N3SB  | ER12-63N3SB |
|                               | 6            | ER1-63N6SB                        | ER3R-63N6SB | ER4-63N6SB | ER4P-63N6SB               | ER4X-63N6SB  | ER12-63N6SB |
| 80                            | 3            | ER1-80N3SB                        | ER3R-80N3SB | ER4-80N3SB | ER4P-80N3SB               | ER4X-80N3SB  | ER12-80N3SB |
|                               | 6            | ER1-80N6SB                        | ER3R-80N6SB | ER4-80N6SB | ER4P-80N6SB               | ER4X-80N6SB  | ER12-80N6SB |

(1) Polycarbonate enclosure flammability rating UL 94-5VA-V0.


**Switch Ratings** - for wire types, ranges and tightening torques, see table on page 413

| Switch Amp Rating | Disconnect Switch | Voltage |     | SCCR with Max Upstream Class J Fuse | Max Hp Rating @ 600Vac |
|-------------------|-------------------|---------|-----|-------------------------------------|------------------------|
|                   |                   | Vac     | Vdc |                                     |                        |
| 16                | RD16-3-508        | 600     | N/A | 65kA / 30A                          | 10                     |
| 25                | RD25-3-508        |         |     | 65kA / 30A                          | 20                     |
| 40                | RD40-3-508        |         |     | 65kA / 30A — 10kA / 60A             | 25                     |
| 63                | RD63-3-508        |         |     | 65kA / 60A — 50kA / 100A            | 40                     |
| 80                | RD80-3-508        |         |     | 65kA / 60A — 50kA / 100A            | 40                     |

Note: Voltage, SCCR and Horsepower ratings are the same for 3- and 6-pole UL 508 non-fused disconnect switches.

# UL 508 Enclosed Non-Fused Disconnects—16 to 80A

## Enclosure Weights - Lbs & Dimensions - in

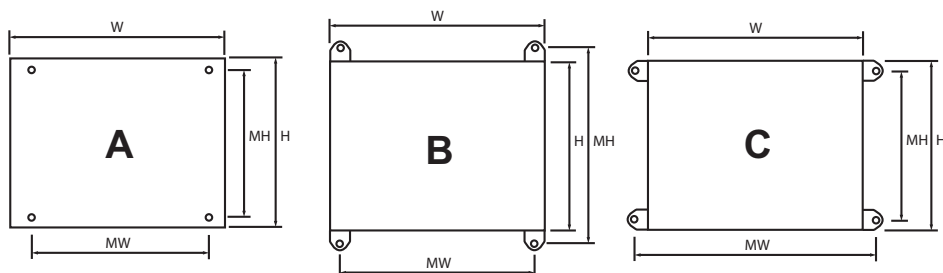


| NEMA<br>Enclosure Type    | No. of<br>Poles | Switch Amp<br>Ratings | H x W x D     | Mounting Centers H x W |         |         | Weight<br>Lbs |
|---------------------------|-----------------|-----------------------|---------------|------------------------|---------|---------|---------------|
|                           |                 |                       |               | A                      | B       | C       |               |
| 1, 3R, 4, 12              | 3               | 16-80A                | 8x6x6         | 6.3x4.3                |         |         | 8             |
|                           | 6               | 16-80A                | 10x8x6        | 8.3x6.3                |         |         | 11            |
| 4X-SST                    | 3               | 16-80A                | 8x6x6         |                        | 7.5x4.3 | 6.3x5.5 | 8             |
|                           | 6               | 16-80A                | 10x8x6        |                        | 9.5x6.3 | 8.3x7.5 | 11            |
| 4X-Plastic <sup>(1)</sup> | 3               | 16-63A                | 7.4x8.7x5.8   |                        | 8x3.6   | 3.6x8   | 4             |
|                           |                 | 80A                   | 9.4x8.7x5.9   |                        | 10x3.6  | 5.6x8   | 5             |
|                           | 6               | 16-80A                | 11.4x10.7x6.3 |                        | 12x5.6  | 7.64x10 | 6             |

(1) Polycarbonate.

## Available Field-Installed Accessories - Order Separately

|  | Auxiliary Contacts |                    |                       |                |                                       |             |
|--|--------------------|--------------------|-----------------------|----------------|---------------------------------------|-------------|
|  | Contact Type       | Number of Contacts | Continuous Amp Rating | Voltage Rating | Max Number of Aux Contacts per Switch | Part Number |
|  | NO + NC            | 1 Ea               | 10A                   | 240Vac         | 4                                     | BAC01       |
|  | NO                 | 2                  | 10A                   | 240Vac         | 4                                     | BAC02       |



Auxiliary Contact Configurations

|  | Terminal Shrouds - includes terminal shroud for both lineside <i>and</i> loadside |                 |  |                       |  |             |
|--|-----------------------------------------------------------------------------------|-----------------|--|-----------------------|--|-------------|
|  | Switch Amp Rating                                                                 | Number of Poles |  | Location on Switch    |  | Part Number |
|  | 16-40A                                                                            | 3               |  | Lineside and Loadside |  | TSH1-3TB    |
|  | 63-80A                                                                            | 3               |  | Lineside and Loadside |  | TSH2-3TB    |

|  | Switched 4 <sup>th</sup> Pole - converts 3-pole switch to 4-pole switch |  |  |  |  |             |
|--|-------------------------------------------------------------------------|--|--|--|--|-------------|
|  | Switch Amp Rating                                                       |  |  |  |  | Part Number |
|  | 16                                                                      |  |  |  |  | POLE-16     |
|  | 25                                                                      |  |  |  |  | POLE-25     |
|  | 40                                                                      |  |  |  |  | POLE-40     |

## Fused, Dead Front Disconnect Switches

### 15149 Series

#### Specifications

**Description:** Fused, dead front disconnect switches

#### Ratings:

Volts: — 600Vac

Amps: — 0-30A

SCCR: — 200kA RMS Sym.

**Dielectric SCCR:** 2200V

**Motor Rating:** 5Hp

**Poles:** 2 to 3

**Agency Information:** UL Recognized, file E120756 for General Industrial installations. Guide WGEU2. CSA certified, file LR37129-6. Examined under the new proposed standard UL 1429 which imparts a stricter set of test conditions than the former program that combined the applicable portions for UL 512 (Fuse Holders) and UL 98 (Enclosed Switches).



#### Features and Benefits

- Fuse holders in the pull-out head eliminate possibility of electric shock while changing fuse.
- Accepts Class J fuses


#### Ordering Information

To order, specify: 15149 + number of poles.

Example: 15149-2 = 2-pole device.

COOPER

**Bussmann**

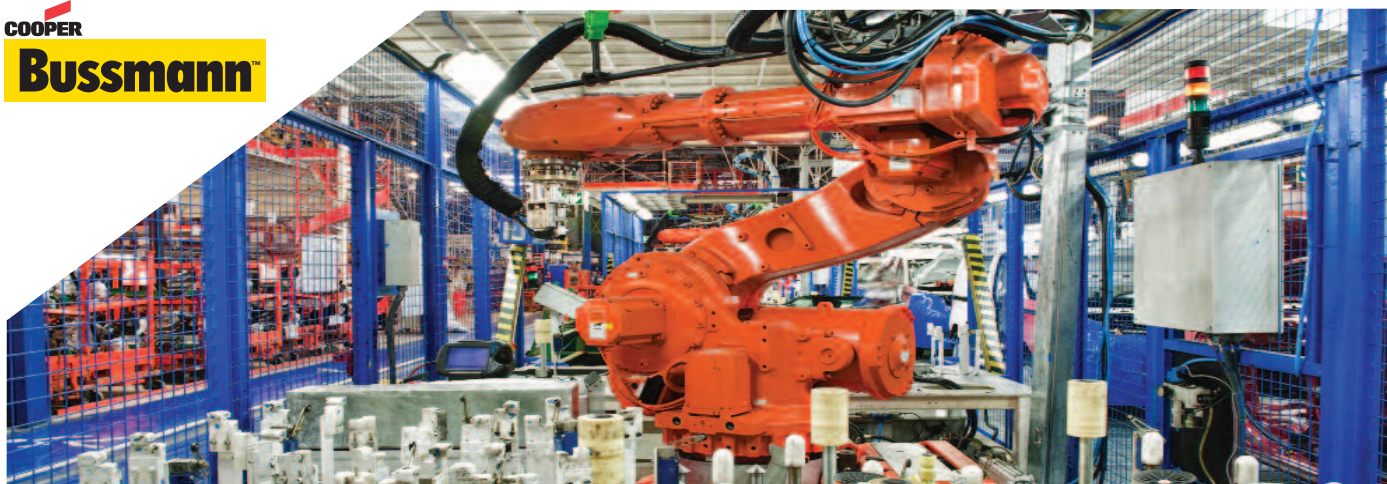

## Flexibility and Convenience Make Point-of-Use Configuration Easy



Full range of open disconnect switches with versatile options and accessories that ship within 24 hours

[www.cooperbussmann.com](http://www.cooperbussmann.com)