MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
208LS125

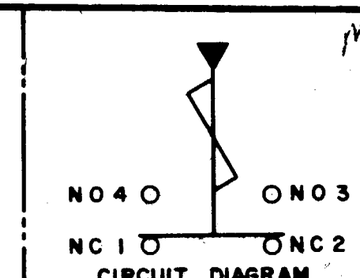

CIRCUIT DIAGRAM

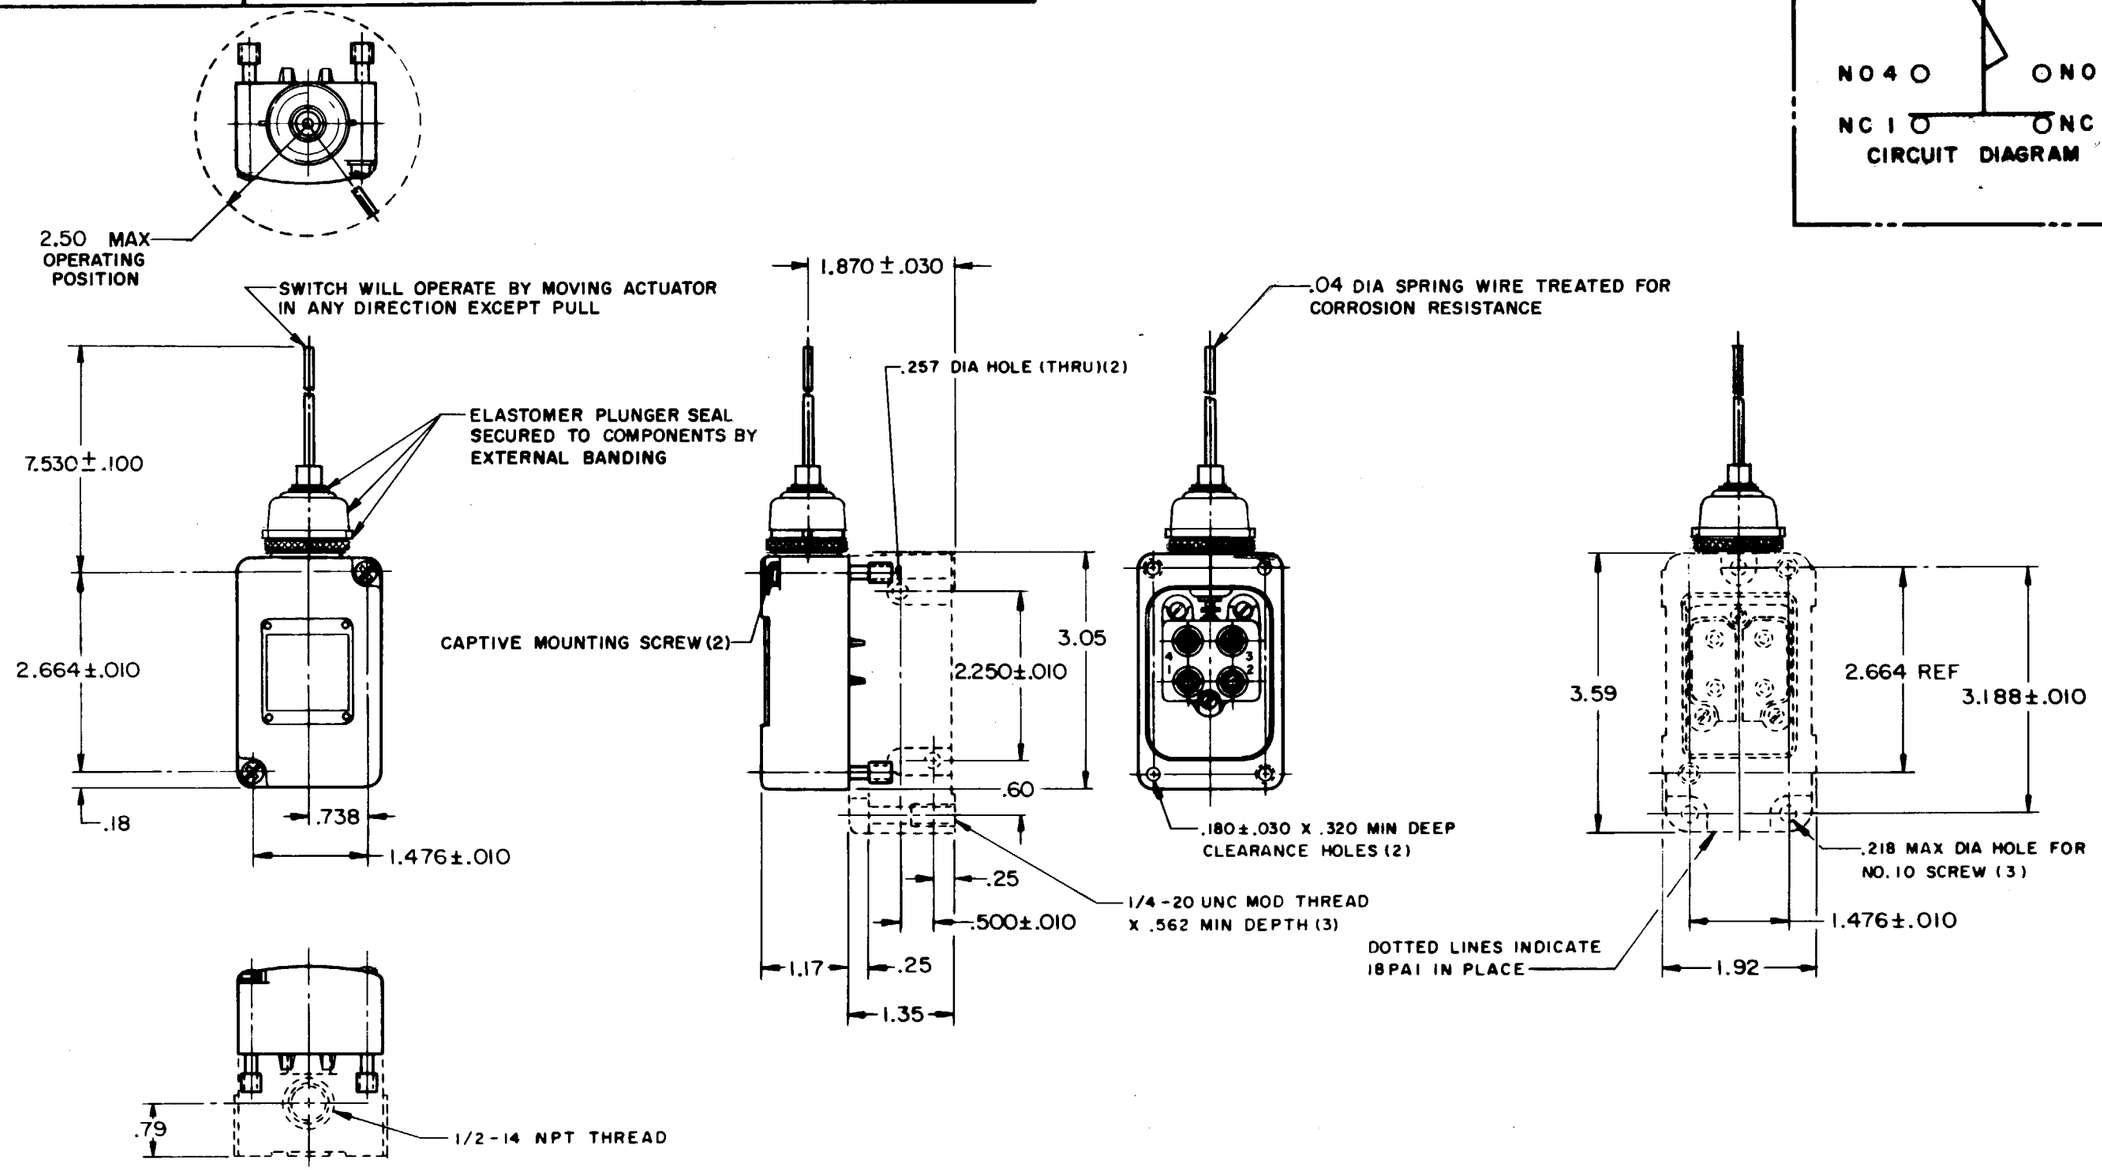

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	
	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	SCALE 1/2 TO 1
		DO NOT SCALE PRINT
OPERATING FORCE – – – – – 1 OZ MAX	10A-120, 240, OR 480 VAC, 1/4 HP - 120 VAC 1/2 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC .1A - 550 VDC PILOT DUTY: 600 VAC MAX	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES **TOLERANCES ARE:** ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±1°
SWITCH-BASIC REPLACEMENT – – – – 2MN9		WEIGHT

DRAWING NUMBER	M 208LS125	REPLACES	
ISSUE	5	RELEASE NO.	25 JUN 65
		CHECK	UCS
REVISIONS		CHECK	25 JUN 65
A	C015200 RER 23 JUN 65		
B	C025152 DAW 19 APR 69		
C	C036863 RER 1 APR 76	CHECK	DA
D	CO-77031 JDB 22 DEC 93		
		CHECK	25 JUN 65
		CHECK	UCS
		CHECK	25 JUN 65
DRAWN	RER 24 JUN 65		

FO-50378-003