


CONFIGURATION	PART NUMBER	LENGTH
CABLE ASSEMBLY, 4 POLE, 10 AWG, FEMALE, 90 DEGREE, SINGLE KEY	P28996-MXX	AS REQUESTED

### DIMENSIONS

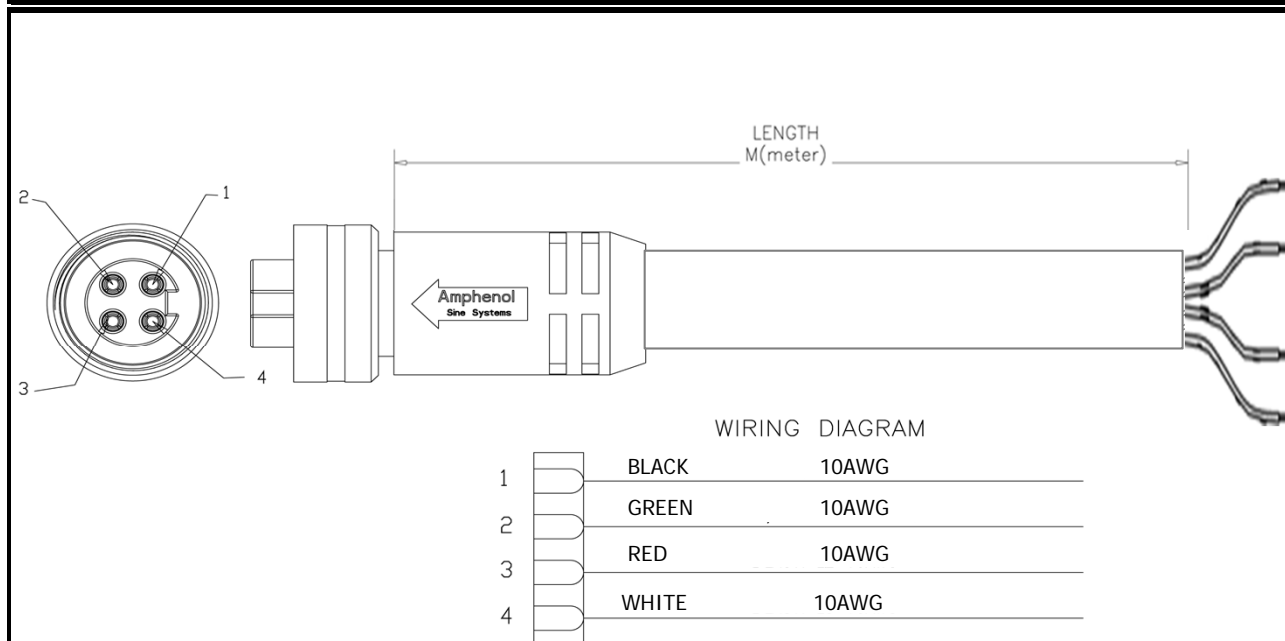

### TECHNICAL DATA

<b>APPROVALS:</b>	UL, c(UL)
<b>STANDARD CONFORMITY:</b>	UL 2237
<b>TEMPERATURE RANGE:</b>	-20C to +90C
<b>PROTECTION:</b>	IP 67, NEMA 6P
<b>VOLTAGE RATING:</b>	600VAC/600VDC
<b>AMPERAGE:</b>	25A
<b>BODY:</b>	OIL RESISTANT PVC
<b>CONTACTS:</b>	COPPER ALLOY
<b>CONTACT PLATING:</b>	GOLD OVER NICKEL PLATING
<b>CONNECTOR FACE:</b>	PVC BLACK
<b>COUPLING NUT:</b>	MACHINED ALUMINUM, ANODIZED
<b>CABLE SPECIFICATIONS:</b>	UL TYPE TC 600V 90°C DRY 75°C WET, EXPOSED RUN (ER) OR MTW 600V 90°C OR STOOW 105°C 600V - CSA STOOW 600V FT2