

Specification Status: Released

Electrical Rating

Voltage: 72 V max (AC or DC)
Current: 40 A max (AC or DC)

Insulating Material:

Cured, Flame Retardant Epoxy Polymer
meets UL94 V-0 Requirements

Lead Material:

20 AWG Tin Plated Copper

Marking:

- Manufacturer's Mark
- ⊗ X300 and Part Identification
- □ □ □ Lot Identification

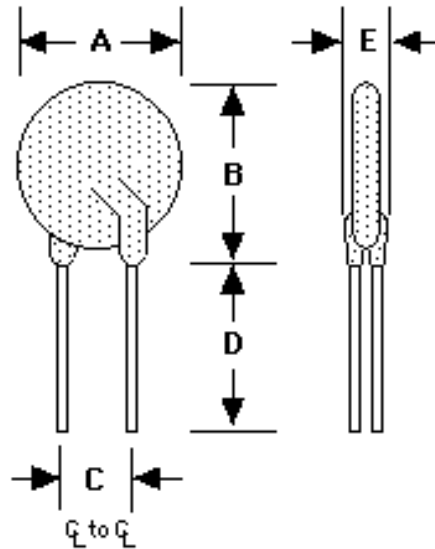


TABLE I. DIMENSIONS:

| | A | | B | | C | | D | | E | |
|------|-----|--------|-----|--------|--------|--------|--------|-----|-----|--------|
| | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX |
| mm: | -- | 23.9 | -- | 28.6 | 9.4 | 10.9 | 25.4 | -- | -- | 3.0 |
| in*: | -- | (0.94) | -- | (1.13) | (0.37) | (0.43) | (1.00) | -- | -- | (0.12) |

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS :

| I HOLD RATED CURRENT | CURRENT RATINGS | | INITIAL RESISTANCE VALUES | | TIME TO TRIP | ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP | TRIPPED- STATE POWER DISSIPATION | |
|----------------------------|----------------------------|-----------------------------------|---------------------------------|------------------------|--------------|---|--|------------------------|
| | AMPERES AT 20°C HOLD | AMPERES AT 20°C HOLD TRIP | OHMS AT 20°C MIN MAX | OHMS AT 20°C MAX | | | SECONDS AT 20°C, 15.0A MAX | OHMS AT 20°C MAX |
| 3.0 | 3.0 | 6.0 | 0.04 | 0.06 | 19.8 | 0.10 | 2.8 | 3.49 |

Agency Recognitions
Reference Documents:
Precedence:
Effectivity:
CAUTION:

UL, CSA, TUV
PS300
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Halogen Free*



* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm.