

4

3

2

1

used for: D-SUB COMBINATION

F

F

E

E

D

D

C



C

B

B

A

A

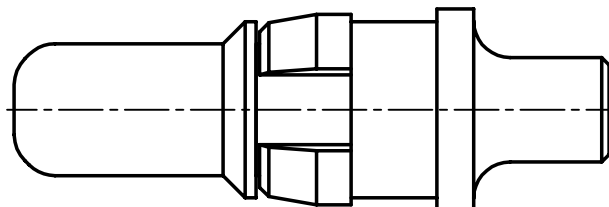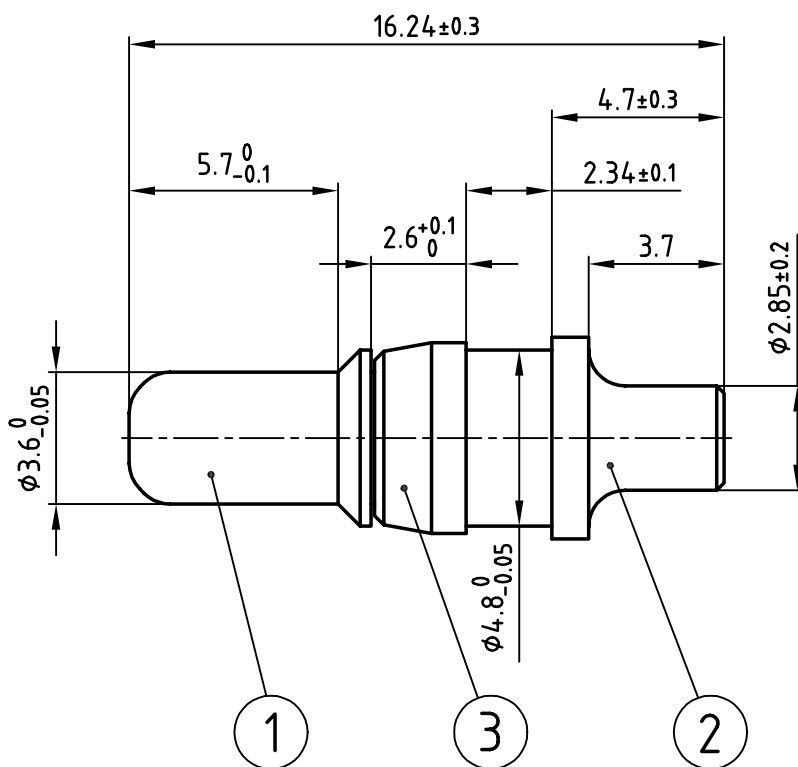

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30μ" HARD GOLD OVER min. 50μ" NICKEL


ITEM 2: TIN PLATED

ITEM 3: NICKEL PLATED

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance
ISO 2768-m



1998	date	name
drawn	23.03.	Barcinski
appd.	23.03.	Mickenbecker
norm		
d-old		

CONEC[®]

scale: 5:1
material: SEE NOTES

title:
HIGH POWER CONTACT MALE
SOLDER PIN STRAIGHT Ø2.85 20A
D-SUB COMBINATION

dwg no: CAD/ REL.13 DIN-A
13K1ID7A 4
sh: 1/1

product no: 131C12039X

4

3

2

1