


TELEPHONE: (201) 376-2922
(212) 227-6005
FAX: (201) 376-8960

SCR, V(DRM) = 100 V TO 199.9 V

```

Manufacturer.....
Mil/High-Rel? (Y/N).....
V(drm) Max..... 100
It(stat) Max. (A)..... 1.6
    @Temp. (test) (xC)..... 85#
Supp Curr. I(TSM)..... 15%
Firing Char-Igt Max..... 75u
Firing Char-Vgt Max..... 900m
Id(off) Max. (A)..... 100u
    @Temp. (test) (xC)..... 125#
I(h) Max. (A)..... 3.0m
V(T) Max..... 2.0
    @It (A)..... 1.6
Dv/Dt Worst Case.....
t(switch) Off Typ. Time (S)...
    @It (test) (A).....
t(switch) Off Typ. Time (S)...
Oper. Temp (xC) Min..... -65
Oper. Temp (xC) Max..... 125#
Pkg Style..... TO-5
Surface Mounted (Y/N)..... N

```

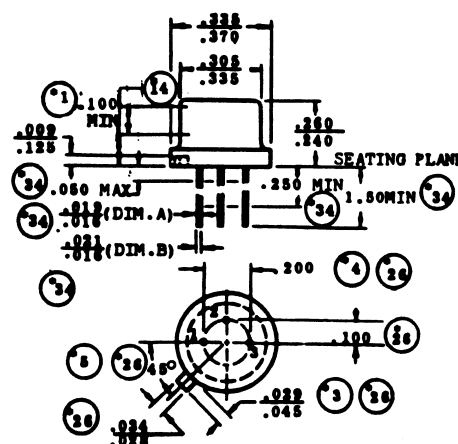

```
# Case Temperature % @ above 125xC 2 It(rms)
```



Quality Semi-Conductors