


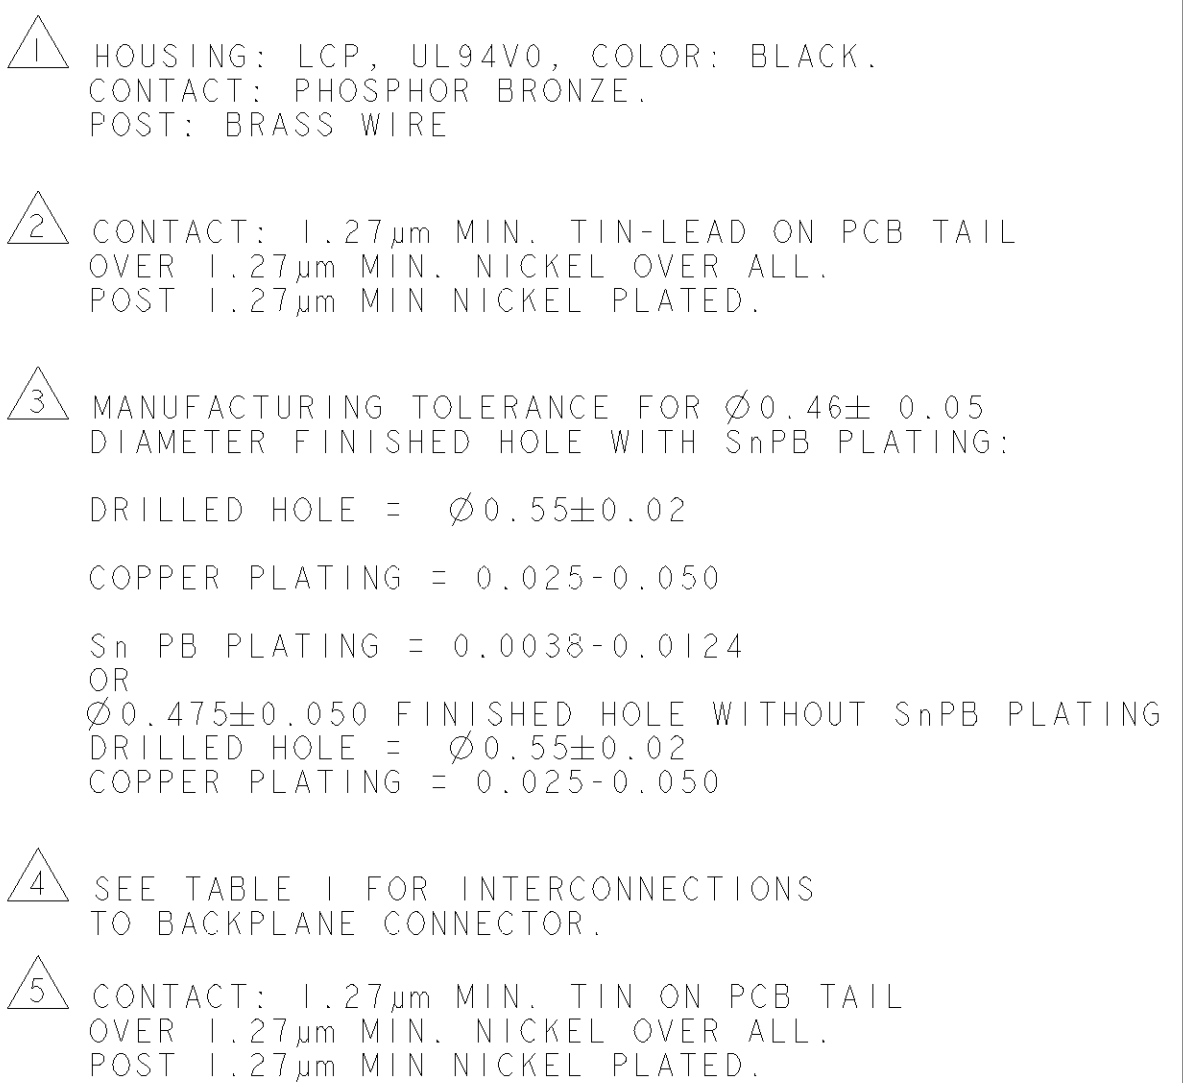

TYPICAL INTERCONNECTIONS FOR
EACH ODD-NUMBERED
COLUMN (WAFER): 1,3,5,7,9,11,13,15

CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	a x	a x
	b x	b x
SIGNAL PAIR	e x	d x
	f x	e x
SIGNAL PAIR	i x	g x
	j x	h x
SIGNAL PAIR	m x	j x
	n x	k x
GROUND	c x, d x, g x, h x, k x, l x, o x, p x (ALL COMMONED)	c x, f x, i x, l x

TYPICAL INTERCONNECTIONS FOR
EACH EVEN-NUMBERED
COLUMN (WAFER): 2,4,6,8,10,12,14

CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	c x	b x
	d x	c x
SIGNAL PAIR	g x	e x
	h x	f x
SIGNAL PAIR	k x	h x
	l x	i x
SIGNAL PAIR	o x	k x
	p x	l x
GROUND	a x, b x, e x, f x, i x, j x, m x, n x (ALL COMMONED)	a x, d x, g x, j x

NOTE: "x" DESIGNATES THE COLUMN NUMBER.

	5	1410123-2
2		1410123-1
PLATING		PART NO

DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$ 1 PLC ± 0.5 2 PLC ± 0.13 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$ 1°		DWN <u>S</u> <u>03SEP2002</u> tyco Tyco Electronics CHG <u>03SEP2002</u> Electronics Harrisburg, PA 17105-3608 APPR <u>C</u> <u>CONSOLE</u> <u>G</u> <u>GRIFFIITH</u> <u>13MAR2006</u>	
		PRODUCT SPEC <u>108-2072</u> APPLICATION SPEC <u>114-13056</u> WEIGHT <u>-</u>		NAME <u>RIGHT-ANGLE PLUG ASSEMBLY, CENTER, 25.4mm, MultiGig RT2, DAUGHTERCARD CONNECTOR, DIFFERENTIAL</u> SIZE CASE CODE DRAWING NO <u>A100779C1410123</u> RESTRICTED TO <u>-</u>	
MATERIAL <u>-</u> 		FINISH <u>-</u> 		CUSTOMER DRAWING <u>-</u> SCALE <u>6:1</u> SHEET <u>1</u> OF <u>1</u> REV <u>A</u>	