

DESIGNED & DIMENSIONED
IN MILLIMETERS[INCHES]

DO NOT
SCALE FROM
THIS PRINT

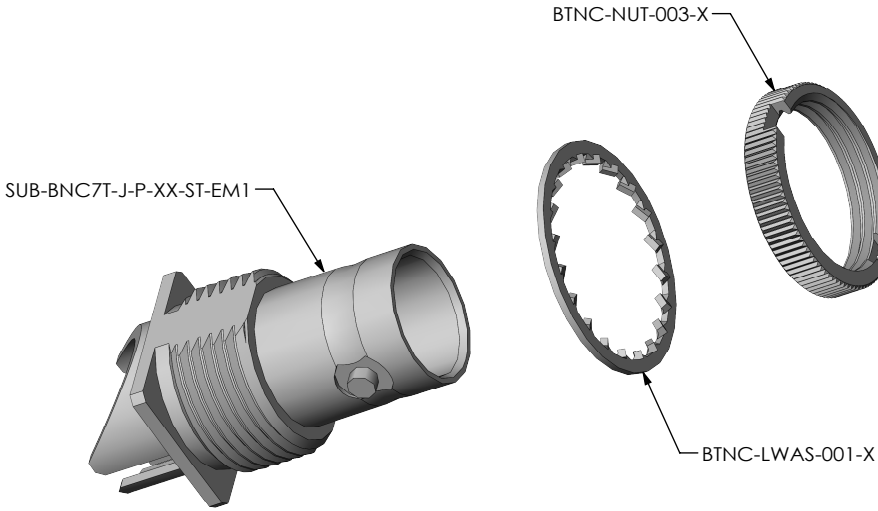


FIG 1
BNC7T-J-P-XX-ST-EM1 SHOWN

NOTES:


1.  REPRESENTS A CRITICAL DIMENSION.
2. FABRICATED PARTS MUST BE FREE OF SCRATCHES, TOOL MARKS, ETC.
3. SUPPLIER TO REMOVE BURRS.
4. RoHS COMPLIANT.
5. COMPONENT PLATING DESIGNATIONS:
 - H: .000030" MIN. GOLD OVER .000050. (MIN) NICKEL.
 - G: .000010" MIN. GOLD OVER .000050" MIN. NICKEL
 - N: .000100" MIN. NICKEL.
6. ASSEMBLY PLATING DESIGNATIONS:
 - HN: (CENTER CONTACT)-H
(OUTER CONTACT) -N
(REMAINING METAL PARTS) -N
 - GN, MN:(CENTER CONTACT)-G
(OUTER CONTACT) -N
(REMAINING METAL PARTS) -N
7. PRODUCT TO BE PACKAGED PER PACKAGING STANDARD CO-RF-WI-3040-M.

F:\DWG\MISC\MKTG\BNC7T-J-P-XX-ST-EM1-MKT.SLDDRW


BNC7T-J-P-XX-ST-EM1

- GENDER**
-J: JACK
- TYPE**
-P: PCB
- TERMINATION**
-EM1: EDGE MOUNT (FOR 1.57[.062] THICK PCB)
- ORIENTATION**
-ST: STRAIGHT
- PLATING SPECIFICATION**
-HN: HEAVY GOLD/NICKEL (SEE NOTES 5 & 6)
(SUB-BNC7T-J-P-HN-ST-EM1)
(BTNC-NUT-003-N)
(BTNC-LWAS-001-N)
- GN: GOLD/NICKEL (SEE NOTES 5 & 6)
(SUB-BNC7T-J-P-GN-ST-EM1)
(BTNC-NUT-003-N)
(BTNC-LWAS-001-N)
- MN: MEDIUM GOLD/NICKEL (EXISTING CUSTOMERS ONLY)
(SUB-BNC7T-J-P-GN-ST-EM1)
(BTNC-NUT-003-N)
(BTNC-LWAS-001-N)

RECOMMENDED MOUNTING HOLE
4.00[.157] MAX. PANEL THICKNESS

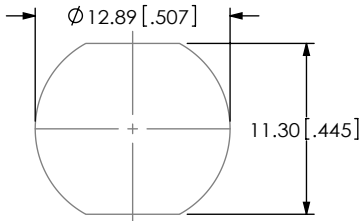

RECOMMENDED LAYOUT
FOR 1.57[.062] PCB

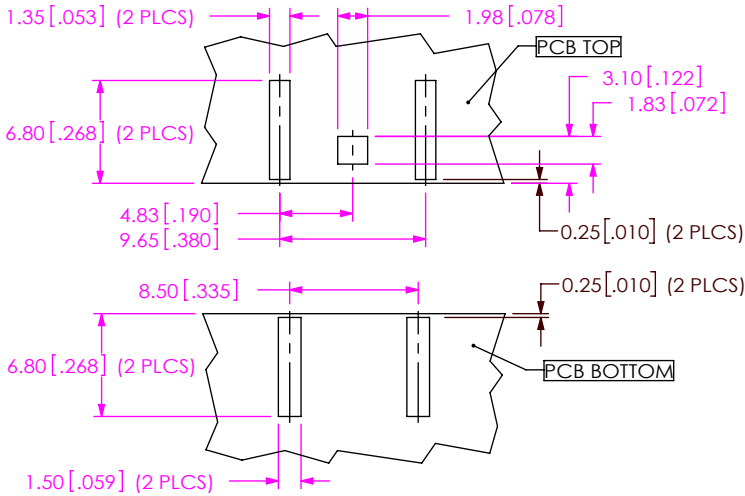

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES ARE:

DECIMALS	ANGLES
.X: ± 0.3 [0.1]	2°
.XX: ± 0.13 [0.05]	
.XXX: ± 0.051 [0.0020]	

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322


DO NOT SCALE DRAWING

SHEET SCALE: 2:1


DESCRIPTION:
BNC7T EDGE MOUNT STRAIGHT JACK

DWG. NO.
BNC7T-J-P-XX-ST-EM1


BY: G.HERMAN 01/04/2008 SHEET 1 OF 2

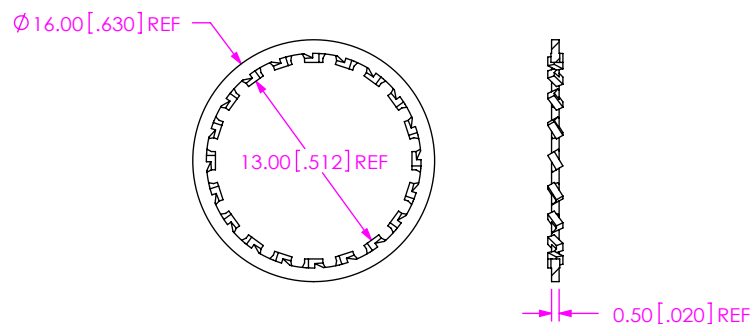

SAMTEC PART NUMBER	ITEM
BTNC-LWAS-001-X	LOCKWASHER

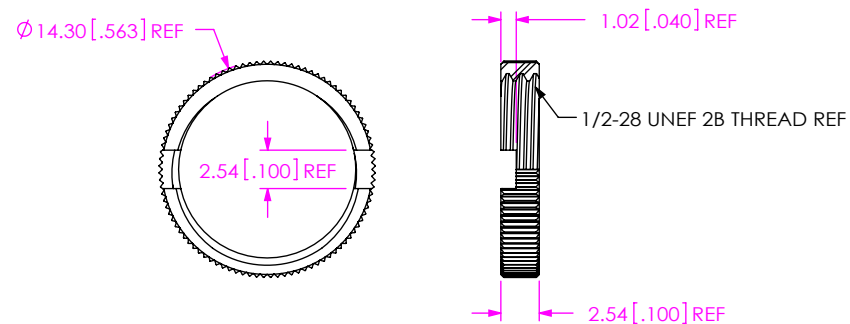

SAMTEC PART NUMBER	ITEM
BTNC-NUT-003-X	KNURLED NUT

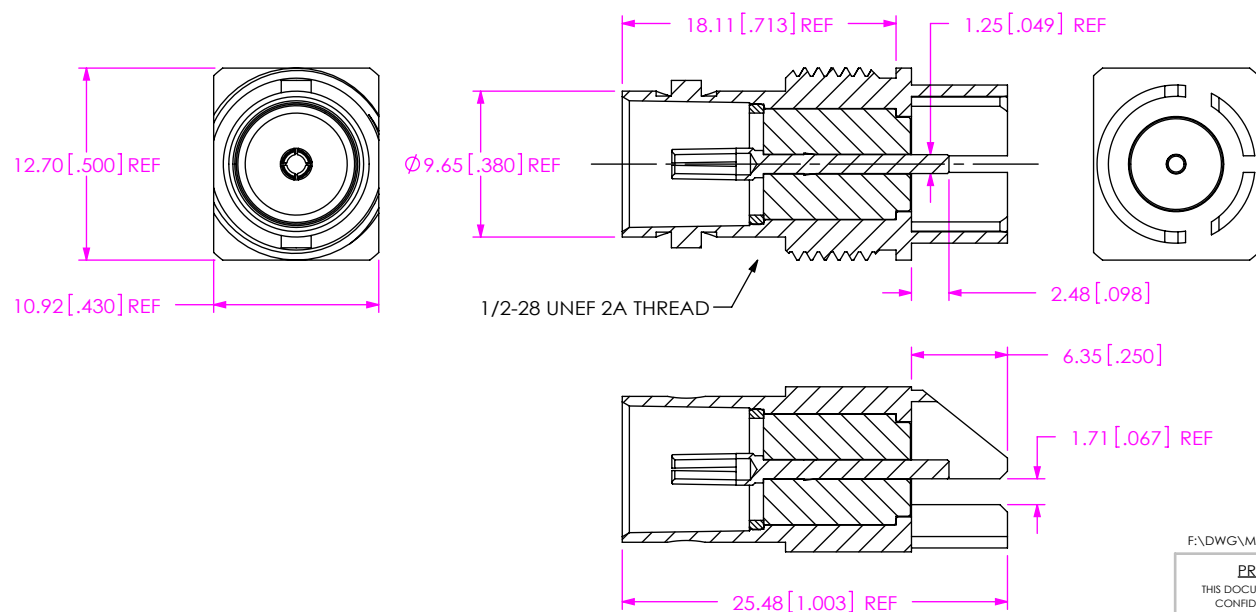

SAMTEC PART NUMBER	ITEM
SUB-BNC7T-J-P-XX-ST-EM1	SUB ASSEMBLY

F:\DWG\MISC\MKTG\BNC7T-J-P-XX-ST-EM1-MKT.SLDDRW

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.	samtec 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322	
	DO NOT SCALE DRAWING	DESCRIPTION: BNC7T EDGE MOUNT STRAIGHT JACK
	SHEET SCALE: 2:1	DWG. NO. BNC7T-J-P-XX-ST-EM1
		BY: G.HERMAN 01/04/2008 SHEET 2 OF 2