

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



March 2008

74LCX86 Low Voltage Quad 2-Input Exclusive-OR Gate with 5V Tolerant Inputs

Features

- 5V tolerant inputs
- 2.3V–3.6V V_{CC} specifications provided
- 6.5ns t_{PD} max. ($V_{CC} = 3.3V$), $10\mu A I_{CC}$ max.
- Power down high impedance inputs and outputs
- ±24mA output drive (V_{CC} = 3.0V)
- Implements proprietary noise/EMI reduction circuitry
- Latch-up performance exceeds 500mA
- ESD performance:
 - Machine model > 2000V
 - Human model > 200V

General Description


The LCX86 contains four 2-input exclusive-OR gates. The inputs tolerate voltages up to 7V allowing the interface of 5V systems to 3V systems.

The 74LCX86 is fabricated with advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.


Ordering Information

Order Number	Package Number	Package Description
74LCX86M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
74LCX86SJ	M14D	14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74LCX86MTC	MTC14	14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.




Connection Diagram



Pin Description

Pin Names	Description
A ₀ -A ₃	Inputs
B ₀ –B ₃	Inputs
O ₀ -O ₃	Outputs

Logic Symbol



Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V _{CC}	Supply Voltage	-0.5V to +7.0V
V _I	DC Input Voltage	-0.5V to +7.0V
Vo	DC Output Voltage, Output in HIGH or LOW State ⁽¹⁾	-0.5V to V _{CC} + 0.5V
I _{IK}	DC Input Diode Current, V _I < GND	-50mA
I _{OK}	DC Output Diode Current	
	$V_O < GND$	–50mA
	$V_O > V_{CC}$	+50mA
Io	DC Output Source/Sink Current	±50mA
I _{CC}	DC Supply Current per Supply Pin	±100mA
I _{GND}	DC Ground Current per Ground Pin	±100mA
T _{STG}	Storage Temperature	−65°C to +150°C

Note:

Recommended Operating Conditions⁽²⁾

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Max.	Units
V _{CC}	Supply Voltage			
	Operating	2.0	3.6	V
	Data Retention	1.5	3.6	
VI	Input Voltage	0	5.5	V
Vo	Output Voltage, HIGH or LOW State	0	V _{CC}	V
I _{OH} / I _{OL}	Output Current			
	$V_{CC} = 3.0V - 3.6V$		±24	mA
	V _{CC} = 2.7V–3.0V		±12	
	V _{CC} = 2.3V–2.7V		±8	
T _A	Free-Air Operating Temperature	-40	85	°C
Δt / ΔV	Input Edge Rate, V _{IN} = 0.8V–2.0V, V _{CC} = 3.0V	0	10	ns/V

Note:

2. Unused inputs must be held HIGH or LOW. They may not float.

^{1.} IO Absolute Maximum Rating must be observed.

DC Electrical Characteristics

				T _A = -40°C	to +85°C	
Symbol	Parameter	V _{CC} (V)	Conditions	Min.	Max.	Units
V _{IH}	HIGH Level Input Voltage	2.3–2.7		1.7		V
		2.7–3.6		2.0		
V _{IL}	LOW Level Input Voltage	2.3–2.7			0.7	V
		2.7–3.6			0.8	
V _{OH}	HIGH Level Output Voltage	2.3-3.6	$I_{OH} = -100 \mu A$	V _{CC} - 0.2		V
		2.3	$I_{OH} = -8mA$	1.8		
		2.7	$I_{OH} = -12mA$	2.2		
		3.0	$I_{OH} = -18mA$	2.4		
			$I_{OH} = -24mA$	2.2		
V _{OL}	LOW Level Output Voltage	2.3-3.6	$I_{OL} = 100 \mu A$		0.2	V
		2.3	I _{OL} = 8mA		0.6	
		2.7	I _{OL} = 12mA		0.4	
		3.0	I _{OL} = 16mA		0.4	
			I _{OL} = 24mA		0.55	
I	Input Leakage Current	2.3-3.6	$0 \le V_I \le 5.5V$		±5.0	μA
I _{OFF}	Power-Off Leakage Current	0	V_I or $V_O = 5.5V$		10	μA
I _{CC}	Quiescent Supply Current	2.3–3.6	$V_I = V_{CC}$ or GND		10	μA
			$3.6V \le V_I \le 5.5V$		±10	
Δl _{CC}	Increase in I _{CC} per Input	2.3–3.6	$V_{IH} = V_{CC} - 0.6V$		500	μA

AC Electrical Characteristics

		$T_A = -40$ °C to +85°C, $R_L = 500\Omega$						
			3V ± 0.3V, 50pF		2.7V, 50pF	V _{CC} = 2.5 C _L =	5V ± 0.2V, 30pF	
Symbol	Parameter	Min.	Max.	Min.	Max.	Min.	Max.	Units
t _{PHL} , t _{PLH}	Propagation Delay	1.5	6.5	1.5	7.0	1.5	7.8	ns
toshl, toshh	Output to Output Skew ⁽³⁾		1.0					ns

Note:

3. Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t_{OSHL}) or LOW-to-HIGH (t_{OSLH}).


Dynamic Switching Characteristics

				$T_A = 25^{\circ}C$	
Symbol	Parameter	V _{CC} (V)	Conditions	Typical	Unit
V _{OLP}	Quiet Output Dynamic Peak V _{OL}	3.3	$C_L = 50 pF, V_{IH} = 3.3 V, V_{IL} = 0 V$	0.8	V
		2.5	$C_L = 30pF, V_{IH} = 2.5V, V_{IL} = 0V$	0.6	
V _{OLV}	Quiet Output Dynamic Valley V _{OL}	3.3	$C_L = 50 pF, V_{IH} = 3.3 V, V_{IL} = 0 V$	-0.8	V
		2.5	$C_L = 30pF, V_{IH} = 2.5V, V_{IL} = 0V$	-0.6	

Capacitance


Symbol	Parameter	Conditions	Typical	Units
C _{IN}	Input Capacitance	$V_{CC} = Open, V_I = 0V \text{ or } V_{CC}$	7	pF
C _{OUT}	Output Capacitance	$V_{CC} = 3.3V$, $V_I = 0V$ or V_{CC}	8	pF
C _{PD}	Power Dissipation Capacitance	$V_{CC} = 3.3V$, $V_I = 0V$ or V_{CC} , $f = 10MHz$	25	pF

AC Loading and Waveforms (Generic for LCX Family)

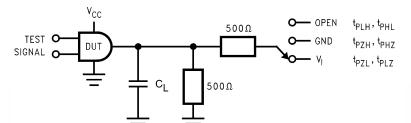


Test	Switch
t _{PLH} , t _{PHL}	Open
t_{PZL}, t_{PLZ}	6V at $V_{CC} = 3.3 \pm 0.3V$ $V_{CC} \times 2$ at $V_{CC} = 2.5 \pm 0.2V$
t_{PZH},t_{PHZ}	GND


Figure 1. AC Test Circuit (C_L includes probe and jig capacitance)




Waveform for Inverting and Non-Inverting Functions




Propagation Delay. Pulse Width and t_{rec} Waveforms




3-STATE Output Low Enable and Disable Times for Logic



Setup Time, Hold Time and Recovery Time for Logic








t_{rise} and t_{fall}

	V _{CC}			
Symbol	3.3V ± 0.3V	2.7V	2.5V ± 0.2V	
V _{mi}	1.5V	1.5V	V _{CC} /2	
V _{mo}	1.5V	1.5V	V _{CC} /2	
V _x	V _{OL} + 0.3V	V _{OL} + 0.3V	V _{OL} + 0.15V	
V _y	V _{OH} – 0.3V	V _{OH} – 0.3V	V _{OH} – 0.15V	

Figure 2. Waveforms (Input Characteristics; f = 1MHz, $t_r = t_f = 3ns$)

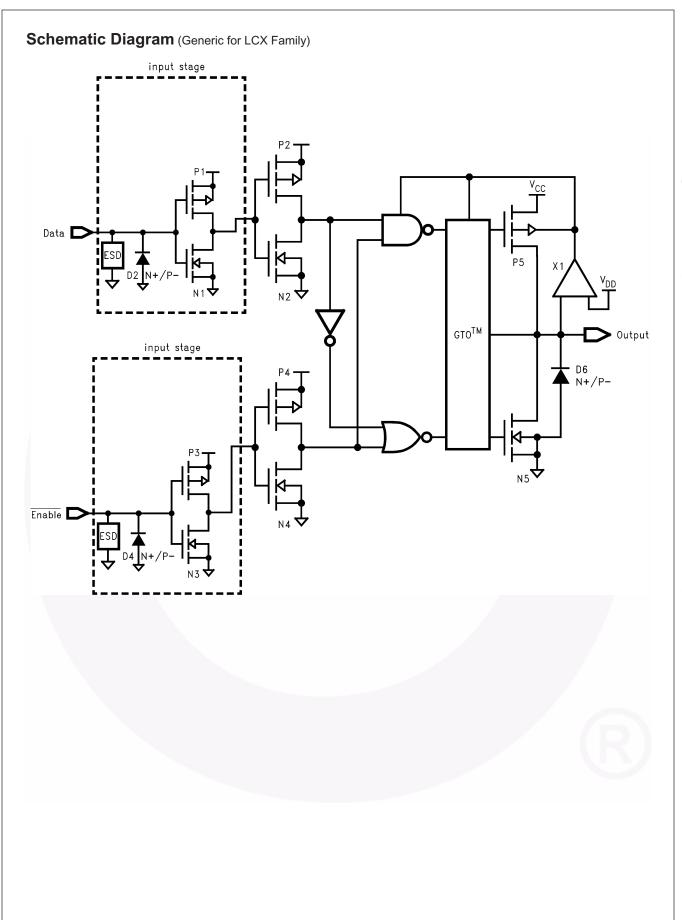





ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor:

74LCX86MX 74LCX86SJX 74LCX86SJ 74LCX86M 74LCX86MTCX 74LCX86MTC