


Panasonic
ideas for life

GU (General Use) Type
[1, 2-Channel (Form A)
4, 8-Pin Type]

PhotoMOS
RELAYS

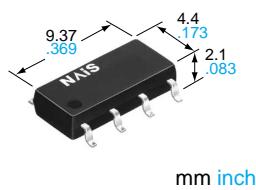

mm inch

FEATURES

1. **Low cost type.**
2. **High sensitivity, Low ON resistance**
Can control a maximum 0.5A (AQY282S, AQW282S) load current with a 5mA input current.
Low ON resistance of 2.5Ω (AQY282S, AQW282S).
Stable operation because there are no metallic contact parts.
3. **Various package design (DIP4, SOP4, DIP8, SOP8 packages are available)**
4. **Low-level off state leakage current**
The SSR has an off state leakage current of several milliamperes, where as the PhotoMOS relay has only 100pA even with the rated load voltage of 350V (AQY280S, AQW280S).

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensors
- Amusement

SOP TYPE

SOP 4pin

Type	Output rating*		Part No.		Packing quantity in tape and reel
	Load voltage	Load current	Picked from the 1/2-pin side	Picked from the 3/4-pin side	
AC/DC type	60 V	500 mA	AQY282SX	AQY282SZ	1,000 pcs.
	350 V	120 mA	AQY280SX	AQY280SZ	
	400 V	100 mA	AQY284SX	AQY284SZ	

*Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 100 pcs.; Case: 2,000 pcs.)

(2) For space reasons, the initial letters of the product number "AQY" and "S", the package type indicator "X" and "Z" are omitted from the seal.

SOP 8pin

Type	Output rating*		Part No.		Packing quantity in tape and reel
	Load voltage	Load current	Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side	
AC/DC type	60 V	350 mA	AQW282SX	AQW282SZ	1,000 pcs.
	350 V	100 mA	AQW280SX	AQW280SZ	
	400 V	80 mA	AQW284SX	AQW284SZ	

* Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 50 pcs.; Case: 1,000 pcs.)

(2) For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

AQO28OS

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

SOP 4pin

Item		Symbol	AQY282S	AQY280S	AQY284S	Remarks
Input	LED forward current	I_F		50 mA		
	LED reverse voltage	V_R		5 V		
	Peak forward current	I_{FP}		1 A		$f = 100 \text{ Hz}$, Duty factor = 0.1%
	Power dissipation	P_{in}		75 mW		
Output	Load voltage (peak AC)	V_L	60 V	350 V	400 V	
	Continuous load current (peak AC)	I_L	0.5 A	0.12 A	0.1 A	
	Peak load current	I_{peak}	1.5 A	0.3 A	0.24 A	100 ms (1 shot), $V_L = \text{DC}$
	Power dissipation	P_{out}		300 mW		
Total power dissipation	P_T		350 mW			
I/O isolation voltage	V_{iso}		1,500 V AC			
Operating temperature	T_{opr}		−40°C to +85°C −40°F to +185°F			Non-condensing at low temperature
Storage temperature	T_{stg}		−40°C to +100°C −40°F to +212°F			

SOP 8pin

Item		Symbol	AQW282S	AQW280S	AQW284S	Remarks
Input	LED forward current	I_F		50 mA		
	LED reverse voltage	V_R		5 V		
	Peak forward current	I_{FP}		1 A		$f = 100 \text{ Hz}$, Duty factor = 0.1%
	Power dissipation	P_{in}		75 mW		
Output	Load voltage (peak AC)	V_L	60 V	350 V	400 V	
	Continuous load current (peak AC)	I_L	0.35 (0.5) A	0.1 (0.13) A	0.08 (0.1) A	(): in case of using only 1 channel
	Peak load current	I_{peak}	1.05 A	0.3 A	0.24 A	100 ms (1 shot), $V_L = \text{DC}$
	Power dissipation	P_{out}		600 mW		
Total power dissipation	P_T		650 mW			
I/O isolation voltage	V_{iso}		1,500 V AC			
Operating temperature	T_{opr}		−40°C to +85°C −40°F to +185°F			Non-condensing at low temperature
Storage temperature	T_{stg}		−40°C to +100°C −40°F to +212°F			

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


SOP 4pin

Item		Symbol	AQY282S	AQY280S	AQY284S	Condition
Input	LED operate current	Typical Maximum	I_{Fon}	1.8 mA 3.0 mA		$I_L = \text{Max.}$
	LED turn off current	Minimum Typical	I_{Foff}	0.2 mA 1.6 mA		$I_L = \text{Max.}$
	LED dropout voltage	Typical Maximum	V_F	1.14 V (1.25 V at $I_F = 50\text{mA}$) 1.5 V		$I_F = 5 \text{ mA}$
	On resistance	Typical Maximum	R_{on}	0.85Ω 2.5Ω	20Ω 25Ω	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
Output	Off state leakage current	Maximum	I_{Leak}		1μA	$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$
	Turn on time*	Typical Maximum	T_{on}	0.9 ms 3 ms	0.3 ms	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
Transfer characteristics	Turn off time*	Typical Maximum	T_{off}		0.5 ms 2 ms	$I_F = 5 \text{ mA}$ $I_L = \text{Max.}$
	I/O capacitance	Typical Maximum	C_{iso}		0.8 pF 1.5 pF	$f = 1 \text{ MHz}$ $V_B = 0\text{V}$
	Initial I/O isolation resistance	Minimum	R_{iso}		1,000 MΩ	500 V DC

SOP 8pin

Item			Symbol	AQW282S	AQW280S	AQW284S	Condition	
Input	LED operate current	Typical	I_{Fon}	1.8 mA		$I_L = \text{Max.}$		
		Maximum		3.0 mA				
Input	LED turn off current	Minimum	I_{Foff}	0.2 mA		$I_L = \text{Max.}$		
		Typical		1.6 mA				
Input	LED dropout voltage	Typical	V_F	1.14 V (1.25 V at $I_F = 50\text{mA}$)			$I_F = 5 \text{ mA}$	
		Maximum		1.5 V				
Output	On resistance	Typical	R_{on}	0.85Ω	20Ω	28Ω	$I_F = 5 \text{ mA}$	
		Maximum		2.5Ω	25Ω	35Ω	$I_L = \text{Max.}$ Within 1 s on time	
Output	Off state leakage current		I_{Leak}	1μA			$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$	
	Turn on time*		T_{on}	0.9 ms	0.3 ms		$I_F = 5 \text{ mA}$	
Transfer characteristics	Turn off time*			3 ms		$I_L = \text{Max.}$		
	Turn off time*		T_{off}	0.5 ms				
Transfer characteristics	I/O capacitance		C_{iso}	2 ms		$f = 1 \text{ MHz}$ $V_B = 0V$		
	Initial I/O isolation resistance			0.8 pF				
Transfer characteristics	Initial I/O isolation resistance		R_{iso}	1.5 pF		1,000 MΩ		
	Initial I/O isolation resistance			500 V DC				

*Turn on/Turn off time

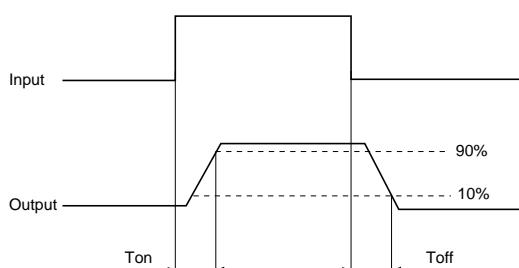

3-4 the terminal leads receive solder plating or solder dip plating.

REFERENCE DATA

[SOP type]

1. Load current vs. ambient temperature

characteristics




Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$ -40°F to $+185^{\circ}\text{F}$


Type of connection: A

(1) AQY282S

(2) AQY280S, AQY284S


(3) AQW282S

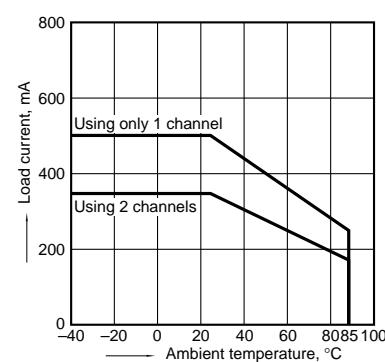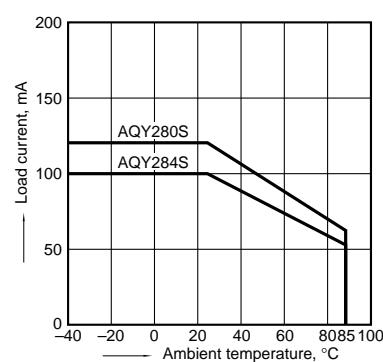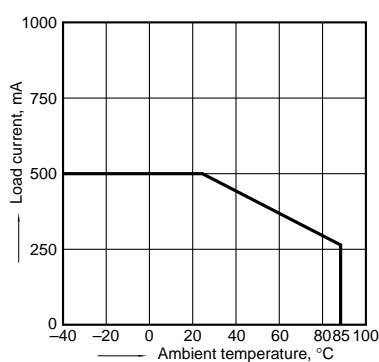

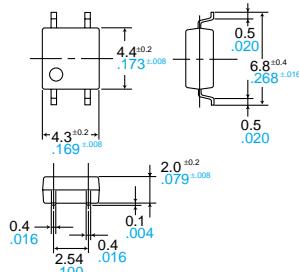
DIMENSIONS**AQY28OS**

Terminal thickness = 0.15 .006
General tolerance: $\pm 0.1 \pm .004$

Recommended mounting pad
(Top view)




Tolerance: $\pm 0.1 \pm .004$

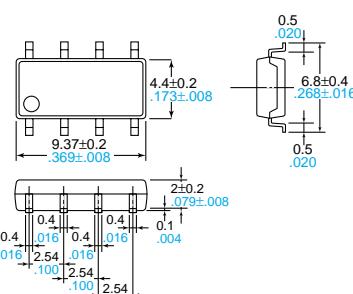AQW28OS

Terminal thickness = 0.15 .006
General tolerance: $\pm 0.1 \pm .004$


Recommended mounting pad
(Top view)



Tolerance: $\pm 0.1 \pm .004$


AQY28OEH(A)

Through hole terminal type

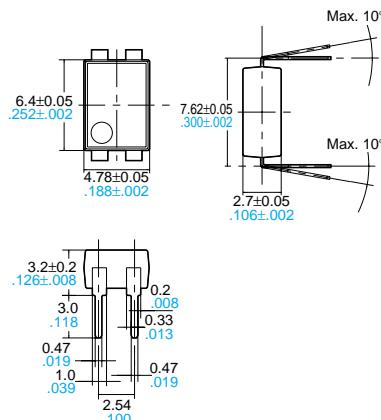


Terminal thickness = 0.2 .008
General tolerance: $\pm 0.1 \pm .004$

Surface mount terminal type

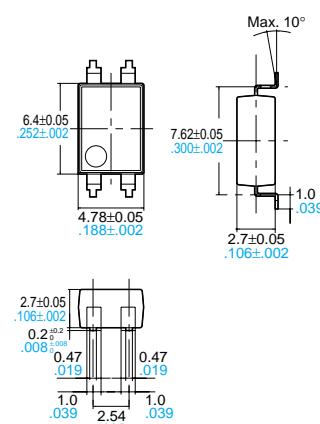


Terminal thickness = 0.2 .008
General tolerance: $\pm 0.1 \pm .004$

PC board pattern (Bottom view)



Tolerance: $\pm 0.1 \pm .004$



Mounting pad (Top view)



Tolerance: $\pm 0.1 \pm .004$



AQW28OEH(A)

Through hole terminal type

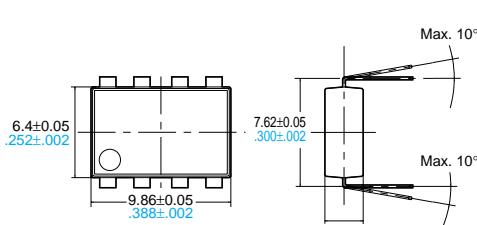


Terminal thickness = 0.2 .008
General tolerance: $\pm 0.1 \pm .004$

Surface mount terminal type

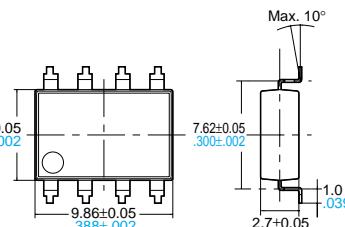


Terminal thickness = 0.2 .008
General tolerance: $\pm 0.1 \pm .004$

PC board pattern (Bottom view)

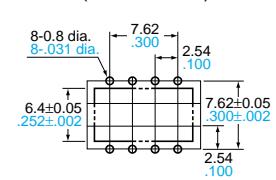

Tolerance: $\pm 0.1 \pm .004$

Mounting pad (Top view)



Tolerance: $\pm 0.1 \pm .004$