# Low Voltage Dual SPDT Analog Switch with Negative Swing Audio Capability

The NLAS2750 is a dual SPDT low on–resistance analog switch. It can operate from a single 1.8 V to 5.0 V power supply. It is a bi–directional switch that can switch a negative voltage swing audio signal without requiring a coupling capacitor. With a single power supply, the audio signal can swing over the range from -2.5 V to V<sub>CC</sub>.

#### Features

- Capable to Switch Negative Swing Audio Signals Without Requiring a DC Blocking Capacitor
- Low On–resistance (R<sub>ON</sub>)
- Low Voltage Digital Control Logic: (V<sub>INH</sub> = 1.4 V @ V<sub>CC</sub> = 2.7 V to 4.3 V)
- Low Power Consumption ( $I_{CC} \le 250 \text{ nA}$ )
- Space Saving 1.4 mm x 1.8 mm Package UQFN Package
- This is a Pb–Free Device

### **Typical Applications**

- Cellular Phones
- Portable Media Players




## **ON Semiconductor®**

http://onsemi.com

	MARKING DIAGRAM
UQFN10 CASE 488AT	ALM• O



(Note: Microdot may be in either location)



#### FUNCTION TABLE

IN1 (Pin 4)	IN2 (Pin 8)	Function
0	Х	COM1 = NC1
1	Х	COM1 = NO1
Х	0	COM2 = NC2
Х	1	COM2 = NO2

#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 7 of this data sheet.

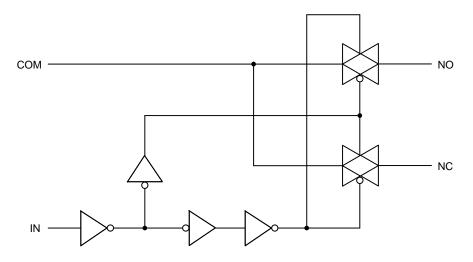


Figure 1. Logic Equivalent Circuit

#### MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	Positive DC Supply Voltage	-0.3 to +5.5	V
V <sub>IS</sub>	Analog Input Voltage (COM, NO, NC) (Note 1)	$(V_{CC}) - 5.5 \text{ or } - 2.5$ whichever is higher, $(V_{CC} + 0.3)$	V
V <sub>IN</sub>	Digital (IN1, IN2)	-0.3 to +5.5	V
I <sub>CC</sub>	Current (GND, V <sub>CC</sub> )	50	mA
I <sub>IS</sub>	Continuous Switch Current (COM, NO, NC) (Note 1)	±250	mA
I <sub>ISP</sub>	Peak Switch Current (Pulsed at 1 ms, 10% Duty Cycle)	±500	mA
T <sub>STG</sub>	Storage Temperature	-65 to +150	°C
PD	Power Dissipation	200	mW
V <sub>ESD</sub>	ESD (Human Body Model) All pins I/O to GND	6 8	kV
I <sub>LU</sub>	Latch-up (per JESD78)	300	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Signals on COM, NO, NC, exceeding V<sub>CC</sub> will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	Power Supply Range	1.8	5.0	V
V <sub>IN</sub>	Digital Select Input Voltage Overvoltage Tolerance (OVT) (IN1, IN2)	GND	5.0	V
V <sub>IS</sub>	Analog Input Voltage (NC, NO, COM)	-2.5	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature Range		+85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise or Fall Time (IN1, IN2) V <sub>CC</sub> < 2.7 V V <sub>CC</sub> ☑ 2.7 V		20 10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

### ELECTRICAL CHARACTERISTICS (V<sub>CC</sub> = 2.7 V, ±10%)

	Parameter	Test Conditions	Guaranteed Maximum Limit -40°C to 85°C			_
ANALOG SWIT			СН			
V <sub>IS</sub>	Analog Signal Range (Note 2)		-2.5		V <sub>CC</sub>	V
R <sub>DS(on)</sub>	On-Resistance	$V_{CC} = 2.7 \text{ V},$ $V_{IS} = (V_{CC} - 4.5 \text{ V}), -1 \text{ V}, 0 \text{ V}$ $1 \text{ V}, 2 \text{ V}, V_{CC}$ $I_{IS} = 100 \text{ mA}$		0.6	1.3	Ω
$\Delta R_{ON}$	On–Resistance Match			0.1		Ω
R <sub>ON</sub> Flatness	On–Resistance Resistance Flatness			0.37		Ω
I <sub>NO/NC(off)</sub>	Switch Off Leakage Current	Vec = 27.V		50		nA
I <sub>COM(off)</sub>		$V_{CC} = 2.7 V,$ $V_{NC/NO} = -2.5 V \text{ or } 2.5 V,$ $V_{COM} = 2.5 V \text{ or } -2.5 V$			±250	nA
I <sub>COM(on)</sub>	Channel On Leakage Current			50	±250	nA

#### **DIGITAL CONTROL**

V <sub>INH</sub>	Input Voltage High	$V_{CC} = 5 V$ $V_{CC} = 2.7 V \text{ to } 4.3 V$	1.6 1.4			V
V <sub>INL</sub>	Input Voltage Low	$V_{CC}$ = 2.7 V to 5 V			0.6	V
C <sub>IN</sub>	Input Capacitance			5		pF
I <sub>INL</sub> or I <sub>INH</sub>	Input Current	$V_{IN} = 0$ or $V_{CC}$			±1	μΑ

#### POWER CONSUMPTION

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Guaranteed by design, not subject to production testing.

#### DYNAMIC CHARACTERISTICS (V<sub>CC</sub> = 2.7 V, ±10%)

			Guaranteed Maximum Limit		m Limit	
			-40°C to 85°C		;	
Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
t <sub>BBM</sub>	Break–Before–Make Time (Notes 6 and 7)		1000	1250		ns
t <sub>ON(EN)</sub>	Enable Turn–On Time (Notes 6 and 7)	$V_{CC}$ = 2.7 V, V <sub>S</sub> = 1.5 V, R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 35 pF		80	150	ns
t <sub>OFF(EN)</sub>	Enable Turn–Off Time (Notes 6 and 7)			110	130	ns
Q <sub>INJ</sub>	Charge Injection (Note 6)	$\begin{array}{l} C_{L} = 1 \; nF, \; R_{GEN} = 0 \; \Omega, \\ V_{GEN} = 0 \; V \end{array}$		60		рС
OIRR	Off-Isolation (Note 6)	$V_{CC}$ = 2.7 V, R <sub>L</sub> = 50 Ω,		-58		dB
X <sub>TALK</sub>	Crosstalk (Notes 6 and 8)	$C_{L} = 5 \text{ pF}, \text{ f} = 300 \text{ kHz}$		-61		dB
BW	Bandwidth (Note 6)	$V_{CC}$ = 2.7 V, $R_L$ = 50 $\Omega$ , –3 dB		44		MHz
C <sub>NC/NO(off)</sub>	Channel–Off Capacitance (Note 6)	V <sub>CC</sub> = 2.7 V, f = 1 MHz		25		pF
C <sub>COM/NC/NO(on)</sub>	Channel–On Capacitance (Note 6)			75		pF

3. Typ. = 25°C

4. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum is used in this data sheet.5. Typical values are for design aid only, not guaranteed nor subject to production testing.

6. Guaranteed by design, not subject to production testing.

7.  $V_{IS}$  = input voltage to perform proper function.

8. Crosstalk Measured between channels.

## **TYPICAL CHARACTERISTICS**

(25°C, unless otherwise specified)



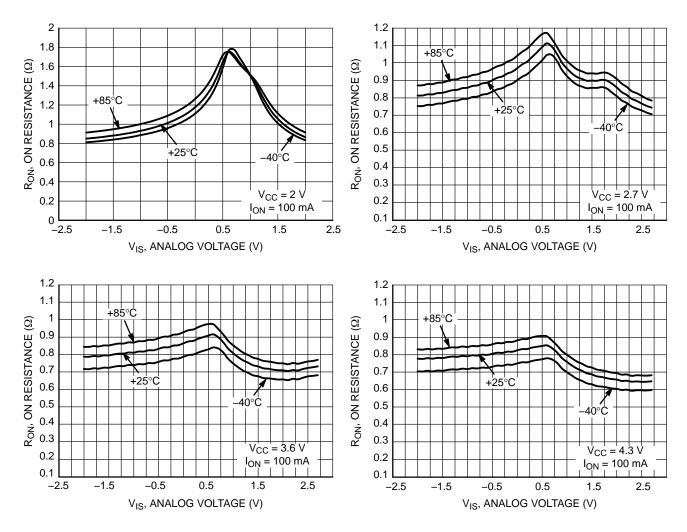



Figure 2. On Resistance ( $R_{ON}$ ) vs. Analog Input Voltage ( $V_{IS}$ )




0




Frequency






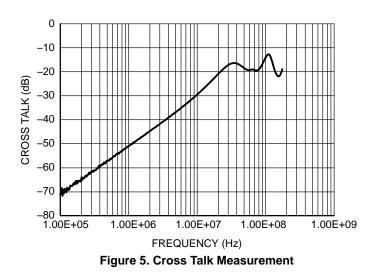



## **TEST CIRCUITS**










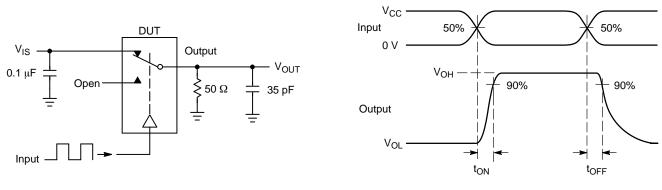













Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch.  $V_{ISO}$ , Bandwidth and  $V_{ONL}$  are independent of the input signal direction.

$$\begin{split} &V_{ISO} = \text{Off Channel Isolation} = 20 \text{ Log} \Big( \frac{V_{OUT}}{V_{IN}} \Big) \text{for } V_{IN} \text{ at } 100 \text{ kHz} \\ &V_{ONL} = \text{On Channel Loss} = 20 \text{ Log} \Big( \frac{V_{OUT}}{V_{IN}} \Big) \text{ for } V_{IN} \text{ at } 100 \text{ kHz} \text{ to } 50 \text{ MHz} \end{split}$$

Bandwidth (BW) = the frequency 3 dB below V<sub>ONL</sub> V<sub>CT</sub> = Use V<sub>ISO</sub> setup and test to all other switch analog input/outputs terminated with 50  $\Omega$ 



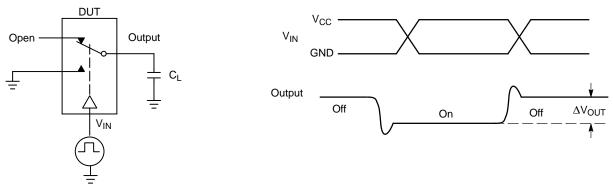



Figure 10. Charge Injection: (Q)

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NLAS2750MUTAG	UQFN10 (Pb–Free)	3000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### PACKAGE DIMENSIONS

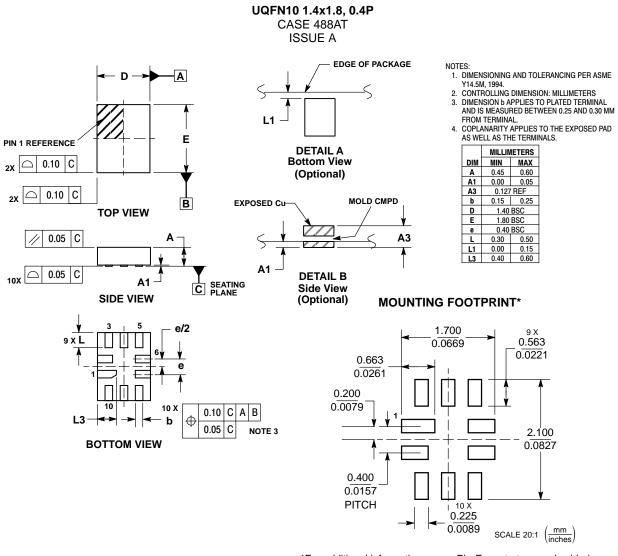

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

**ON Semiconductor** and **OD** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights of others. SCILLC products are not designed, intended, or authorized for use as components insystems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirma

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative