

2.45 GHz Band Pass Filter**P/N 2450BP15P0100**

Detail Specification: 07/07/09

Page 1 of 2

General Specifications


Part Number	2450BP15P0100
Frequency (MHz)	2400 - 2500
Insertion Loss	1.3 dB max.
Return Loss	9.5 dB min.
Attenuation (min.)	26 dB @ 3.4 - 3.6 GHz
Attenuation (min.)	20 dB @ 4.8 - 5.0 GHz


Impedance	50 Ω
Input Power	500 mW max.
Reel Quantity	4,000
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity 45-75%RH, 12 mos. max*

* - 1 yr shelf life in bag; 1 week shelf life out of bag;
Vacuum reseal unused reel

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450BP15P0100S
		T & R	Suffix = E	Eg. 2450BP15P0100E
	Termination Style	100% Tin	Suffix = None	Eg. 2450BP15P0100(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 2450BP15P0100(E or S)/Pb

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN



Mechanical Dimensions

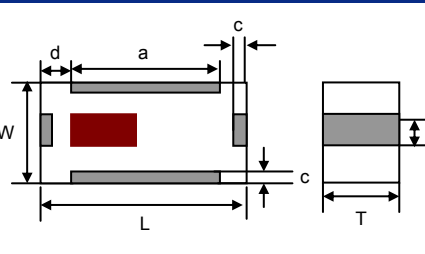	In	mm	
L	0.079 $\pm$ 0.006	2.00 $\pm$ 0.15	
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10	
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10	
a	0.049 $\pm$ 0.006	1.25 $\pm$ 0.15	
b	0.012 $\pm$ 0.006	0.30 $\pm$ 0.15	
c	0.010 $\pm$ 0.006	0.25 $\pm$ 0.15	
d	0.014 $\pm$ 0.006	0.35 $\pm$ 0.15	

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

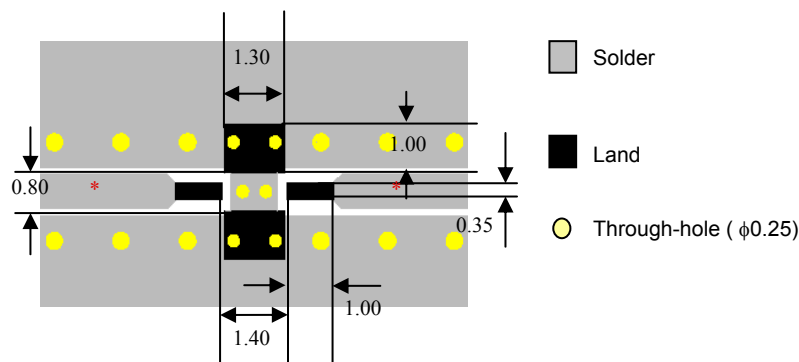

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

Preliminary

"High Frequency Ceramic Solutions"


2.45 GHz Band Pass Filter

P/N 2450BP15P0100

Detail Specification: 07/07/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

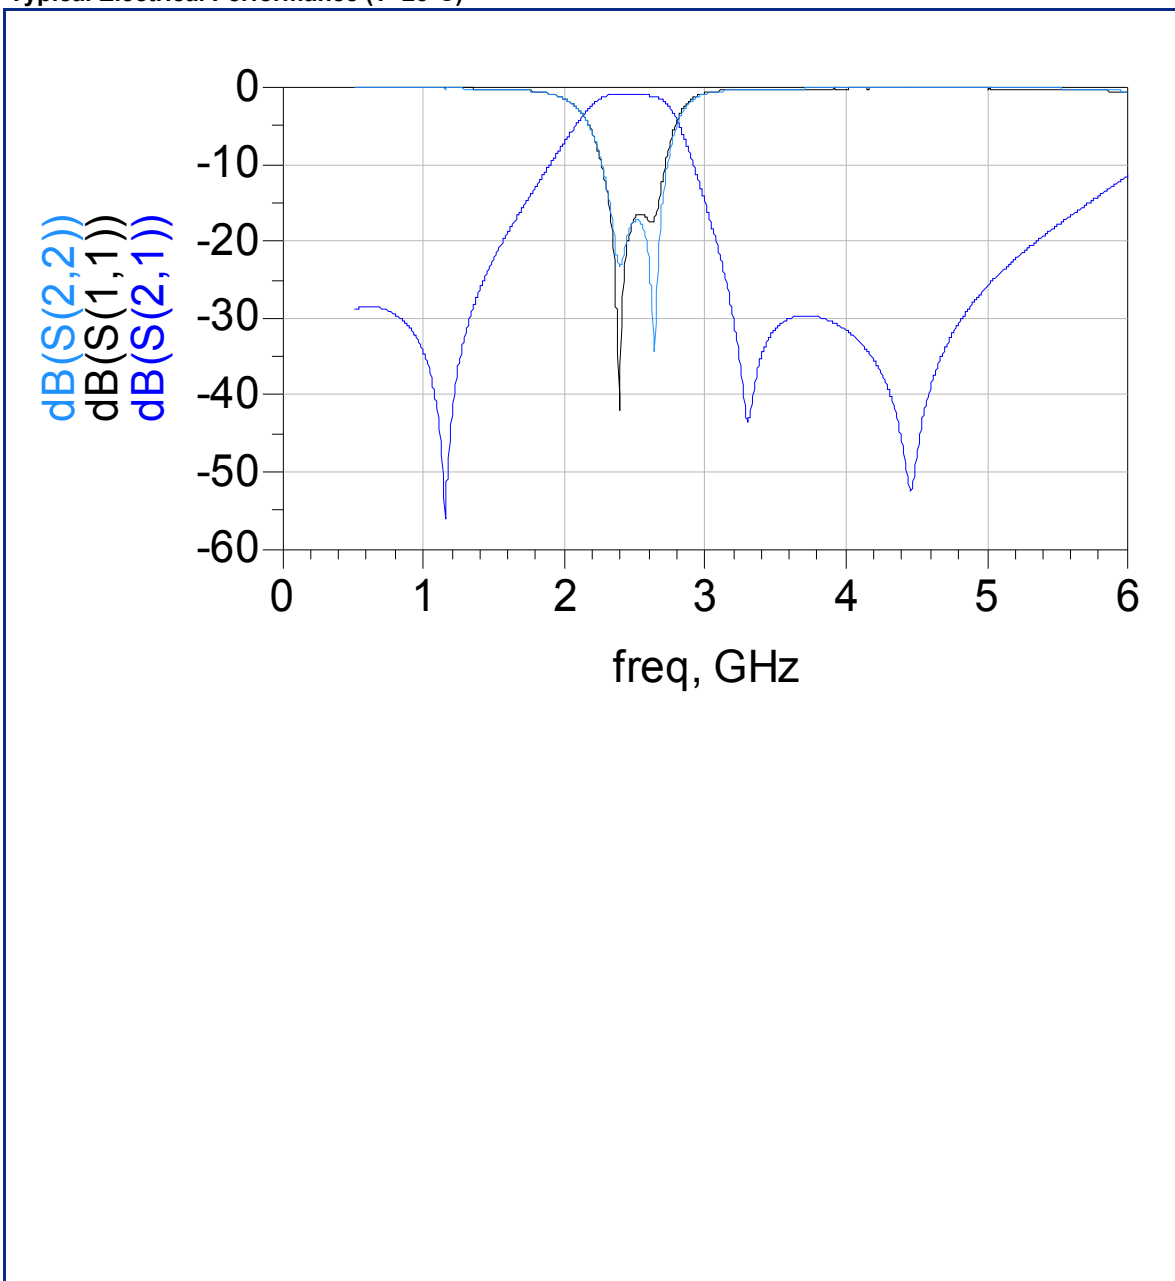

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved