# EE-SX77/87

# Slim, Compact Photomicrosensor that is still easy to use.

- Compact, thin profile enables dense mounting.
- Indicator is visible from both sides.
- Wide operating voltage range: 5 to 24 VDC





Be sure to read Safety Precautions on page 4.

#### **Ordering Information**

Pre-wired Models	Infrared light
------------------	----------------


Appearance	Sensing	Cable length	Sensing distance		Output	Indicator mode	Model	
Appearance	method		Sensing	configuration			NPN output	PNP output
Standard	Dark-ON  Light-ON  Dark-ON  Dark-ON  Light-ON  Dark-ON  Light-ON  Light-ON  Light-ON				Dark ON	Incident light	EE-SX770 2M	EE-SX770P 2M
Li				Daik ON	No incident light	EE-SX770A 2M	EE-SX770R 2M	
		Light ON	Incident light	EE-SX870 2M	EE-SX870P 2M			
T					Light-ON	No incident light	EE-SX870A 2M	EE-SX870R 2M
L-shaped					Incident light	EE-SX771 2M	EE-SX771P 2M	
		Daik-ON	No incident light	EE-SX771A 2M	EE-SX771R 2M			
			Light ON	Incident light	EE-SX871 2M	EE-SX871P 2M		
Ш		Dark-ON    Dark-ON	Dark-ON			No incident light	EE-SX871A 2M	EE-SX871R 2M
T-shaped						Incident light	EE-SX772 2M	EE-SX772P 2M
				No incident light	EE-SX772A 2M	EE-SX772R 2M		
					Light-ON	Incident light	EE-SX872 2M	EE-SX872P 2M
						No incident light	EE-SX872A 2M	EE-SX872R 2M

**OMRON** 

# **Ratings and Specifications**

	Туре	Standard	L-shaped	T-shaped			
	NPN models	EE-SX770/EE-SX870 EE-SX770A/EE-SX870A	EE-SX771/EE-SX871 EE-SX771A/EE-SX871A	EE-SX772/EE-SX872 EE-SX772A/EE-SX872A			
Item	PNP models	EE-SX770P/EE-SX870P EE-SX770R/EE-SX870R	EE-SX771P/EE-SX871P EE-SX771R/EE-SX871R	EE-SX772P/EE-SX872P EE-SX772R/EE-SX872R			
Sensing distance	;	5 mm (slot width)					
Sensing object		Opaque: 2 × 0.8 mm min.					
Differential distar	nce	0.025 mm					
Light source		GaAs infrared LED with a peak wavelength of 940 nm					
Indicator		Light indicator (red) (turns ON when light is interrupted for models with A or R suffix)					
Supply voltage		5 to 24 VDC ±10%, ripple (p-p): 10%	max.				
Current consump	otion	35 mA max. (NPN models), 30 mA m	ax. (PNP models)				
Control output		NPN open collector: 5 to 24 VDC, 100 mA max.  100 mA load current with a residual voltage of 0.8 V max.  40 mA load current with a residual voltage of 0.4 V max.  OFF current (leakage current): 0.5 mA max.  PNP open collector: 5 to 24 VDC, 50 mA max.  50 mA load current with a residual voltage of 1.3 V max.  OFF current (leakage current): 0.5 mA max.					
Response freque	ncy *	1 kHz min. (3 kHz average)					
Ambient illumina	tion	1,000 lx max. with fluorescent light on the surface of the receiver					
Ambient tempera	ture range	Operating: -25 to +55°C Storage: -30 to +80°C (with no icing)					
Ambient humidity	y range	Operating: 5% to 85% Storage: 5% to 95% (with no condensation)					
Vibration resistar	nce	Destruction: 20 to 2,000 Hz (peak acceleration: 100 m/s²) 1.5-mm double amplitude for 2 h (4-min periods) each in X, Y, and Z directions					
Shock resistance	•	Destruction: 500 m/s² for 3 times each in X, Y, and Z directions					
Degree of protect	tion	IEC60529 IP60					
Connecting meth	od	Pre-wired (standard cable length: 2 m)					
Weight (package	d)	Approx. 20 g					
Material	erial Case: Polybutylene phthalate (PBT)						


<sup>\*</sup> The response frequency was measured by detecting the following rotating disk.




## **Engineering Data (Typical)**

#### **Sensing Position Characteristics**


#### **EE-SX770**



#### **Sensing Position Characteristics**



#### **Repeated Sensing Position Characteristics**



No. of repetitions: 20, Ta = 25°C

Note: The data applies to dark status. Operation may be affected by external light interference or light coming through the sensing object.

### I/O Circuit Diagrams

#### **NPN Output**

Model	Output configuration	Timing charts	Output circuit		
EE-SX770 EE-SX771 EE-SX772	Dark-ON	Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	Light indicator  (red)    Load   Load		
EE-SX870 EE-SX871 EE-SX872	Light-ON	Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	(control output) 100 mA max.  Blue (GND)		
EE-SX770A EE-SX771A EE-SX772A	Dark-ON	Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	Light indicator  Brown (Vcc)  (red)  Main  Black (OUT)  Fig. 24 VDC		
EE-SX870A EE-SX871A EE-SX872A	Light-ON	Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	Gontrol output) 100 mA max.  3 Blue (GND)		

#### **PNP Output**

Model	Output configuration	Timing chart	Output circuit		
EE-SX770P EE-SX771P EE-SX772P	Dark-ON	Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	Light indicator (red)  Main  Black (OUT)  5 to 24 VDC		
EE-SX870P EE-SX871P EE-SX872P	Light-ON	Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	circuit Load Blue (GND)		
EE-SX770R EE-SX771R EE-SX772R	Dark-ON	Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	Light indicator (red)  Brown (Vcc)  Black (OUT)  5 to 24 VDC		
EE-SX870R EE-SX871R EE-SX872R	Light-ON	Incident Interrupted Light indicator (red) ON OFF Output transistor ON OFF Load (e.g., relay) Operates Releases	circuit Load Blue (GND)		

### **Safety Precautions**

#### Refer to Warranty and Limitations of Liability.



This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.




#### **Precautions for Correct Use**

Make sure that this product is used within the rated ambient environment conditions.

(Unit: mm)

#### **Dimensions**

Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

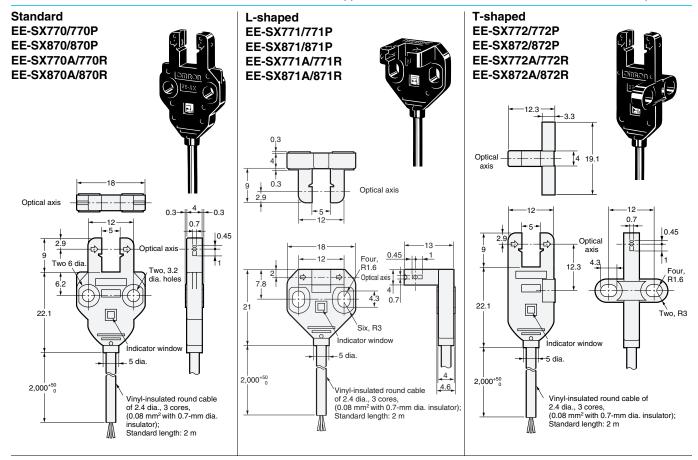

#### Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments

#### Warranty and Limitations of Liability

#### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

#### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

#### **Application Considerations**

#### **SUITABILITY FOR USE**

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

#### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

#### Disclaimers

#### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

#### **DIMENSIONS AND WEIGHTS**

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

#### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

#### **ERRORS AND OMISSIONS**

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2012.4

In the interest of product improvement, specifications are subject to change without notice.

