

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 FREEPORT, ALABAMA
 FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BAF1-3CN18X1

ISSUE 1

M BAF1-3CN18X1

DRAWING NUMBER

7

2

ISSUE

5

REPLACES
 RELEASE NO. SR-13006

CHECK

REVISIONS

A	SR-13006	REN	21 SEP 67
B	CO 40076-C	T M M	12 JAN 82
C	CO51000-E	K A G	25 AUG 83
D	CO-54987F	J A S	14 MARCH 85
E	CO 72788	C O	22 AUG 92
F	CO 77179-E	D A T	17 MAY 94

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

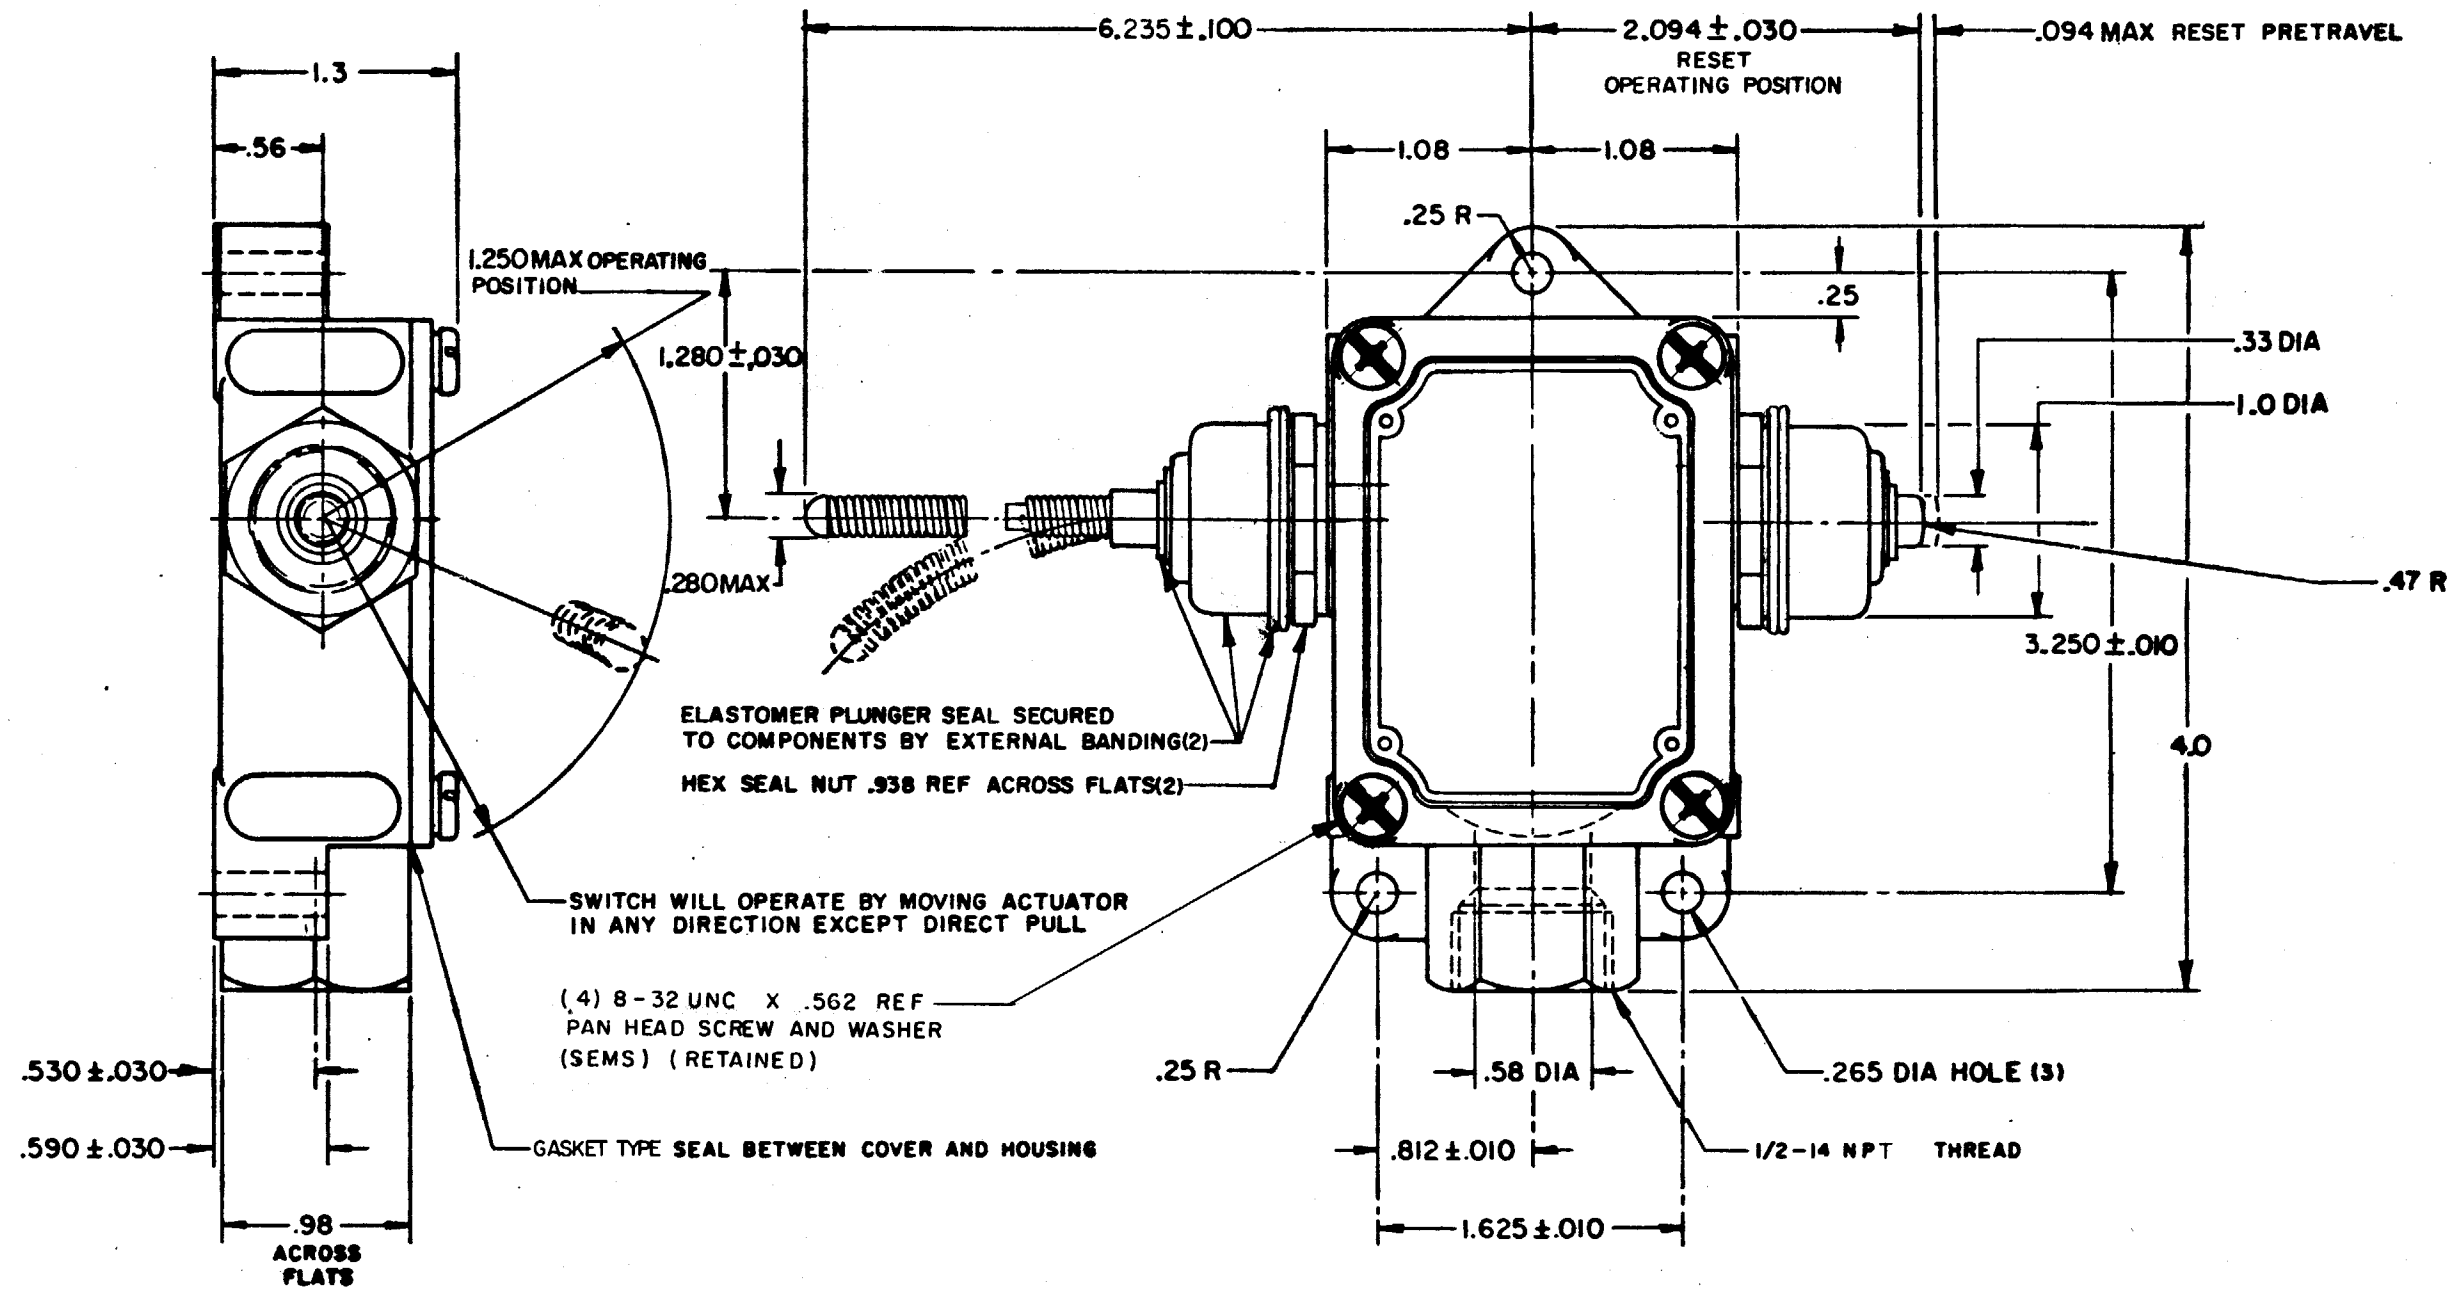

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING POSITION - - - - - 15° MAX	CONTACT ARRANGEMENT S P D T MAINTAINED CONTACT	DO NOT SCALE PRINT
RESET CHARACTERISTICS	-L19- 15 A-125, 250, OR 480 VAC 3/4 HP-125 VAC; 1 1/2 HP-250 VAC 1/2 A-125 VDC; 1/4 A-250 VDC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.008 ANGLES ±
OPERATING FORCE - - - - - 1 1/2 LB MAX		WEIGHT
OVERTRAVEL - - - - - .219 MIN		
SWITCH-BASIC REPLACEMENT - - BA-3CX71B		

FO-80378-003
 DRAWN
 R E R 21 SEP 67
 CHECK
 L S D 6 OCT 67
 CHECK