

#### Is Now Part of



## ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer

October 2000



## 74LCXH245 Low Voltage Bidirectional Transceiver with Bushold

#### **General Description**

The LCXH245 contains eight non-inverting bidirectional buffers with 3-STATE outputs and is intended for bus oriented applications. The device is designed for low voltage (2.5V and 3.3V)  $V_{CC}$  applications. The  $T/\overline{R}$  input determines the direction of data flow through the device. The OE input disables both the A and B ports by placing them in a high impedance state.

The LCXH245 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation. The LCXH16244 data inputs include active bushold circuitry, eliminating the need for external pull-up resistors to hold unused or floating data inputs at a valid logic level.

#### **Features**


- 5V tolerant control inputs
- 2.3V-3.6V V<sub>CC</sub> specifications provided
- $\blacksquare$  7.0 ns  $t_{PD}$  max (V  $_{CC}$  = 3.3V), 10  $\mu A$   $I_{CC}$  max
- Power down high impedance outputs
- $\pm$ 24 mA output drive (V<sub>CC</sub> = 3.0V)
- Implements patented noise/EMI reduction circuitry
- Latch-up performance exceeds 500 mA
- Bushold on inputs eliminates the need for external pull-up/pull-down resistors
- ESD performance: Human body model > 2000V Machine model > 200V

#### **Ordering Code:**

Order Number	Package Number	Package Description
74LCXH245WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74LCXH245SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74LCXH245MSA	MSA20	20-Lead Shrink Small Outline Package (SSOP), EIAJ TYPE II, 5.3mm Wide
74LCXH245MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Logic Symbol



#### **Pin Descriptions**

Pin Names	Description
ŌĒ	Output Enable Input
T/R	Transmit/Receive Input
A <sub>0</sub> -A <sub>7</sub>	Side A Inputs or 3-STATE Outputs (Bushold)
B <sub>0</sub> -B <sub>7</sub>	Side B Inputs or 3-STATE Outputs (Bushold)

#### **Connection Diagram**



GTO™ is a trademark of Fairchild Semiconductor Corporation.


## **Truth Table**

Inp	outs	2.1.1.	
OE	T/R	Outputs	
L	L	Bus B <sub>0</sub> – B <sub>7</sub> Data to Bus A <sub>0</sub> – A <sub>7</sub>	
L	Н	Bus A <sub>0</sub> – A <sub>7</sub> Data to Bus B <sub>0</sub> – B <sub>7</sub>	
Н	Х	HIGH Z State on A <sub>0</sub> – A <sub>7</sub> , B <sub>0</sub> – B <sub>7</sub> (Note 1)	

- H = HIGH Voltage Level L = LOW Voltage Level X = Immaterial Z = High Impedance

Note 1: Unused bus terminals during HIGH Z State must be held HIGH or LOW.

## **Logic Diagram**

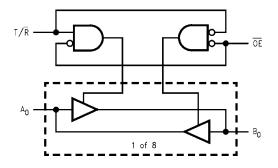

mΑ

mΑ

°C

#### Absolute Maximum Ratings(Note 2) Symbol Parameter Value Conditions Units -0.5 to +7.0 ٧ Supply Voltage $V_{CC}$ T/R, OE ٧ $V_{\mathsf{I}}$ 0.5 to +7.0 I/O Ports -0.5 to $V_{CC} + 0.5$ ٧o DC Output Voltage -0.5 to +7.0 Output in 3-STATE ٧ Output in HIGH or LOW State (Note 3) -0.5 to $V_{CC} + 0.5$ DC Input Diode Current -50 $V_1 < GND$ mΑ $I_{IK}$ DC Output Diode Current -50 V<sub>O</sub> < GND I<sub>OK</sub> mΑ +50 $V_O > V_{CC}$ DC Output Source/Sink Current ±50 mΑ $I_{O}$

±100

±100

-65 to +150

#### **Recommended Operating Conditions** (Note 4)

DC Supply Current per Supply Pin

DC Ground Current per Ground Pin

Storage Temperature

 $I_{CC}$ 

I<sub>GND</sub> T<sub>STG</sub>

Symbol	Parameter			Max	Units
V <sub>CC</sub>	Supply Voltage	Operating	2.0	3.6	V
		Data Retention	1.5	3.6	V
V <sub>I</sub>	Input Voltage		0	V <sub>CC</sub>	V
Vo	Output Voltage	HIGH or LOW State	0	V <sub>CC</sub>	V
		3-STATE	0	5.5	V
I <sub>OH</sub> /I <sub>OL</sub>	Output Current	$V_{CC} = 3.0V - 3.6V$		±24	
		$V_{CC} = 2.7V - 3.0V$ $V_{CC} = 2.3V - 2.7V$		±12	mA
		$V_{CC} = 2.3V - 2.7V$		±8	
T <sub>A</sub>	Free-Air Operating Temperature		-40	85	°C
Δt/ΔV	Input Edge Rate, $V_{IN} = 0.8V - 2.0V$ , $V_{CC} = 3.0V$		0	10	ns/V

Note 2: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 3: I<sub>O</sub> Absolute Maximum Rating must be observed.

Note 4: Floating or unused control inputs must be HIGH or LOW.

#### **DC Electrical Characteristics**

Symbol	Parameter	Conditions	V <sub>CC</sub>	T <sub>A</sub> = -40°C	to +85°C	Units	
Syllibol	Farameter	Conditions	(V)	Min	Max	Units	
V <sub>IH</sub>	HIGH Level Input Voltage		2.3 – 2.7	1.7		V	
			2.7 – 3.6	2.0		7 v	
V <sub>IL</sub>	LOW Level Input Voltage		2.3 – 2.7		0.7	V	
			2.7 - 3.6		0.8	7 '	
V <sub>OH</sub>	HIGH Level Output Voltage	$I_{OH} = -100  \mu A$	2.3 - 3.6	V <sub>CC</sub> - 0.2			
		$I_{OH} = -8 \text{ mA}$	2.3	1.8		Ī	
		$I_{OH} = -12 \text{ mA}$	2.7	2.2		V	
		$I_{OH} = -18 \text{ mA}$	3.0	2.4		Ī	
		I <sub>OH</sub> = -24 mA	3.0	2.2		Ī	
V <sub>OL</sub>	LOW Level Output Voltage	$I_{OL} = 100 \mu A$	2.3 – 3.6		0.2		
		I <sub>OL</sub> = 8mA	2.3		0.6	Ī	
		I <sub>OL</sub> = 12 mA	2.7		0.4	V	
		I <sub>OL</sub> = 16 mA	3.0		0.4	Ī	
		I <sub>OL</sub> = 24 mA	3.0		0.55		
I <sub>1</sub>	Input Leakage Current	$V_I = V_{CC}$ or GND	2.3 – 3.6		±5.0	μΑ	

## DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	V <sub>CC</sub>	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	
Зушьог	Farameter	Conditions	(V)	Min	Max	Ullits	
I <sub>I(HOLD)</sub>	Bushold Input Minimum	$V_{IN} = 0.7V$	2.3	45			
	Drive Hold Current	$V_{IN} = 1.7V$	2.3	-45		μА	
		$V_{IN} = 0.8V$	3.0	75		μΛ	
		V <sub>IN</sub> = 2.0V	3.0	-75			
I <sub>I(OD)</sub>	Bushold Input Over-Drive	(Note 6)	2.7	300			
	Current to Change State	nange State (Note 7)		-300		μА	
		(Note 6)	3.6	450		μΑ	
		(Note 7)	3.6	-450			
l <sub>OZ</sub>	3-STATE I/O Leakage	$V_O = V_{CC}$ or GND	2.3 – 3.6		±5.0	μΑ	
I <sub>CC</sub>	Quiescent Supply Current	$V_I = V_{CC}$ or GND	2.3 – 3.6		10		
		$3.6V \le V_I, V_O \le 5.5V \text{ (Note 5)}$	2.3 – 3.6		±10	μΑ	
Δl <sub>CC</sub>	Increase in I <sub>CC</sub> per Input	$V_{IH} = V_{CC} - 0.6V$	2.3 - 3.6		500	μА	

Note 5: Outputs disabled or 3-STATE only.

Note 6: An external driver must source at least the specified current to switch from LOW-to-HIGH.

Note 7: An external driver must sink at least the specified current to switch from HIGH-to-LOW.

#### **AC Electrical Characteristics**

		$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ , $R_L = 500\Omega$						
Compleal	Parameter	V <sub>CC</sub> = 3.3	3V ± 0.3V	$V_{CC} = 2.7V$		$\rm V_{CC}=2.5V\pm0.2V$		Units
Symbol	Parameter	C <sub>L</sub> = 50 pF		C <sub>L</sub> = 50 pF		C <sub>L</sub> = 30 pF		Units
		Min	Max	Min	Max	Min	Max	1
t <sub>PHL</sub>	Propagation Delay	1.5	7.0	1.5	8.0	1.5	8.4	
t <sub>PLH</sub>	$A_n$ to $B_n$ or $B_n$ to $A_n$	1.5	7.0	1.5	8.0	1.5	8.4	ns
t <sub>PZL</sub>	Output Enable Time	1.5	8.5	1.5	9.5	1.5	10.5	ns
t <sub>PZH</sub>		1.5	8.5	1.5	9.5	1.5	10.5	115
t <sub>PLZ</sub>	Output Disable Time	1.5	7.5	1.5	8.5	1.5	9.0	ns
$t_{PHZ}$		1.5	7.5	1.5	8.5	1.5	9.0	115
toshl	Output to Output Skew		1.0					ns
toslh	(Note 8)		1.0					118

Note 8: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

## **Dynamic Switching Characteristics**

Symbol	Parameter	Conditions	v <sub>cc</sub>	$T_A = 25^{\circ}C$	Units
Oyillboi			(V)	Typical	Oilles
V <sub>OLP</sub>	Quiet Output Dynamic Peak V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3V, V_{IL} = 0V$	3.3	0.8	V
		$C_L = 30 \text{ pF, } V_{IH} = 2.5 \text{V, } V_{IL} = 0 \text{V}$	2.5	0.6	V
V <sub>OLV</sub>	Quiet Output Dynamic Valley V <sub>OL</sub>	$C_L = 50 \text{ pF}, V_{IH} = 3.3 \text{V}, V_{IL} = 0 \text{V}$	3.3	-0.8	V
		$C_L = 30 \text{ pF}, V_{IH} = 2.5 \text{V}, V_{IL} = 0 \text{V}$	2.5	-0.6	· ·

## Capacitance

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = Open, V <sub>I</sub> = 0V or V <sub>CC</sub>	7	pF
C <sub>I/O</sub>	Input/Output Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$ , $f = 10$ MHz	25	pF

### AC LOADING and WAVEFORMS Generic for LCX Family






FIGURE 1. AC Test Circuit ( $C_L$  includes probe and jig capacitance)


Test	Switch
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub>	6V at $V_{CC} = 3.3 \pm 0.3V$ ; and 2.7V $V_{CC}$ x 2 at $V_{CC} = 2.5 \pm 0.2V$
t <sub>PZH</sub> , t <sub>PHZ</sub>	GND




Waveform for Inverting and Non-Inverting Functions




3-STATE Output High Enable and Disable Times for Logic



Propagation Delay. Pulse Width and t<sub>rec</sub> Waveforms



Setup Time, Hold Time and Recovery Time for Logic



3-STATE Output Low Enable and Disable Times for Logic







FIGURE 2. Waveforms (Input Characteristics; f =1MHz,  $t_r = t_f = 3ns$ )

Symbol	V <sub>CC</sub>				
Cymbol	$\textbf{3.3V} \pm \textbf{0.3V}$	2.7V	2.5V ± 0.2V		
$V_{mi}$	1.5V	1.5V	V <sub>CC</sub> /2		
$V_{mo}$	1.5V	1.5V	V <sub>CC</sub> /2		
V <sub>x</sub>	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.15V		
V <sub>v</sub>	V <sub>OH</sub> – 0.3V	V <sub>OH</sub> – 0.3V	V <sub>OH</sub> – 0.15V		

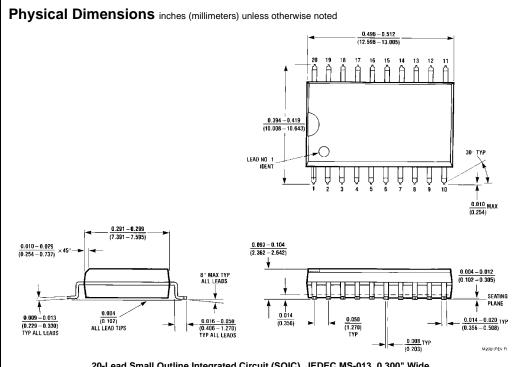


20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Package Number M20B

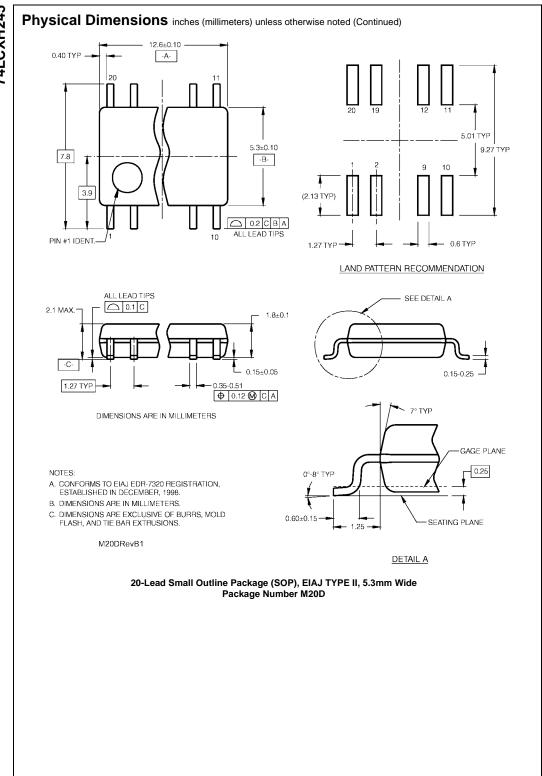

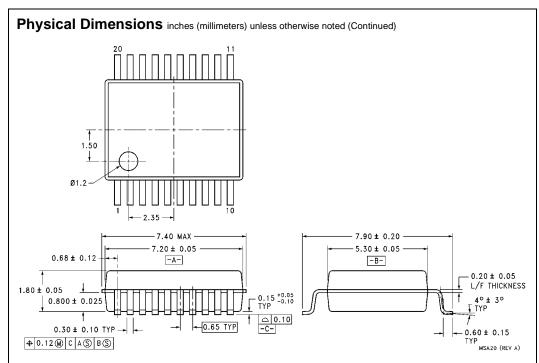

20-Lead Shrink Small Outline Package (SSOP), EIAJ TYPE II, 5.3mm Wide Package Number MSA20

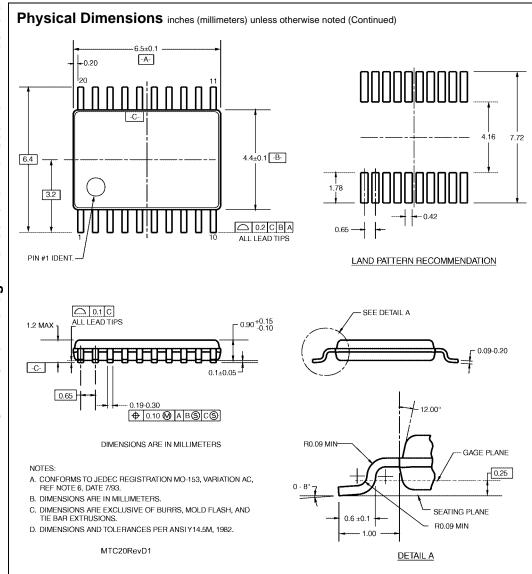

20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC20

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **ON Semiconductor:**

74LCXH245MTC 74LCXH245WMX 74LCXH245MTCX 74LCXH245SJ 74LCXH245WM 74LCXH245MSA