


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1700711013](#)
Status: **Active**
Overview: [High-Speed Pluggable I/O Solutions](#)
Description: zSFP+® Stacked Ganged Assembly with Elastomeric Gasket, 2-by-1 with Outer Down/Up Light Pipes, 40 Circuits

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-170071-0001 \(PDF\)](#)
[Application Specification AS-170071-0002 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	I/O Connectors
Series	170071
Application	Module-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	High-Speed Pluggable I/O Solutions
Product Name	zSFP+®
Type	N/A
UPC	884982402126
Physical	
Circuits (Loaded)	40
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	27.700/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	2
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	0.5A

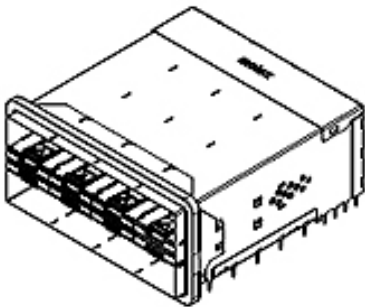

Series image - Reference only

EU ELV
Not Relevant

EU RoHS Compliant REACH SVHC Not Contained Per -ED/79/2015 (17 December 2015) Halogen-Free Status Not Low-Halogen	China RoHS
---	-------------------

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS ELV	Green Image Not Relevant
-------------------	-----------------------------

Search Parts in this Series
[170071](#) Series

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.
Global

Description	Product #
Insertion Tool	0622030140
Extraction Tool, 2 x 1	0622029930
Medium	

Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-170071-0002
Product Specification	PS-170071-0001
Sales Drawing	SD-170071-0002, SD-170071-0005
Symbol/Footprint Data	SYM-170071-0001

This document was generated on 03/30/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION