


ASSEMBLY NUMBER	DETAILS				G MAX	L	BB DIA +.000 -.010	CC DIA	Y THREAD REF SIZE CLASS 2B	W +.005 -.010	SCREW SIZE	REL COM	ACCESSORY (NOT PART OF STANDARD ASSY)	
	NUT	SLEEVE	CLAMP										GROMMET	
10-189010-8	10-189009-8	10-454397-8	10-130511-8		.775	1.310	.250	.540	.4375-28UNEF	.219	6-32NC	35508-87 22752-58	10-36565-101	.125
-10	-10	-10	-10		.837		.312	.665	.5625-24NEF				-122	.188
-12	-12	-12	-12		.963		.438	.793	.6875-24NEF				-143	.312
-14	-14	-14	-14		1.087		.562	.910	.8125-20UNEF				-163	.375
-16	-16	-16	-16		1.150	1.442	.624	1.037	.9375-20UNEF				-183	.500
-18	-18	-18	-18		1.400		.750	1.155	1.0625-18NEF		8-32NC		-203	.625
-20	-20	-20	-18		1.400	1.411	.750	1.281	1.1875-18NEF	.313			-203	.625
-22	-22	-22	-20		1.587		.938	1.408	1.3125-18NEF	.313			-244	.750
-24	-24	-24	-22		1.681		1.000	1.533	1.4375-18NEF	.313			-232	.800

REL	WAS	DATE	D MAN	APPD
35508-87	-20 (-24 CLAMP), .587 (-248)	12-17-58	BARTKOW	
35525-196	.938 (-24 BB), .244 (-24 GROMMET), .750 (-24 GROMMET)			
A1 35525-816	10-101152-61, -62, -63 (SCREW - H)	8-14-59	BARTKOW	
A2 36059-1	10-101152-81, 82-83 (SCREW -10 -12)	12-2-59	RICKS	
B1 36247-4	REV TITLE, CHG PICT.	1-20-60	RICKS	
B2 38536-358	ADD & REL-XX7 FINISH	8-23-62		
B3 38524-1428	ADD & REL-XX0 FINISH	8-29-62		
B4 39525-440	WAS.5625-28 NEF (10 SIZE) (THD COL)	3-15-63	LODON	
B5 43524-279	ADD & REL-XX8 FINISH	11-27-64	MAY	
B6 43525-897	10-36565-244 (GROMMET), .750 (B DIA) (-24)	6-25-65		
B7 47524-1035	ADD & REL-XX9	4-18-67		
B8 53834-3	REV SLEEVE COL	5-25-72		
C 59800-181	(MFG) ADD & REL-XXG	5-8-78		

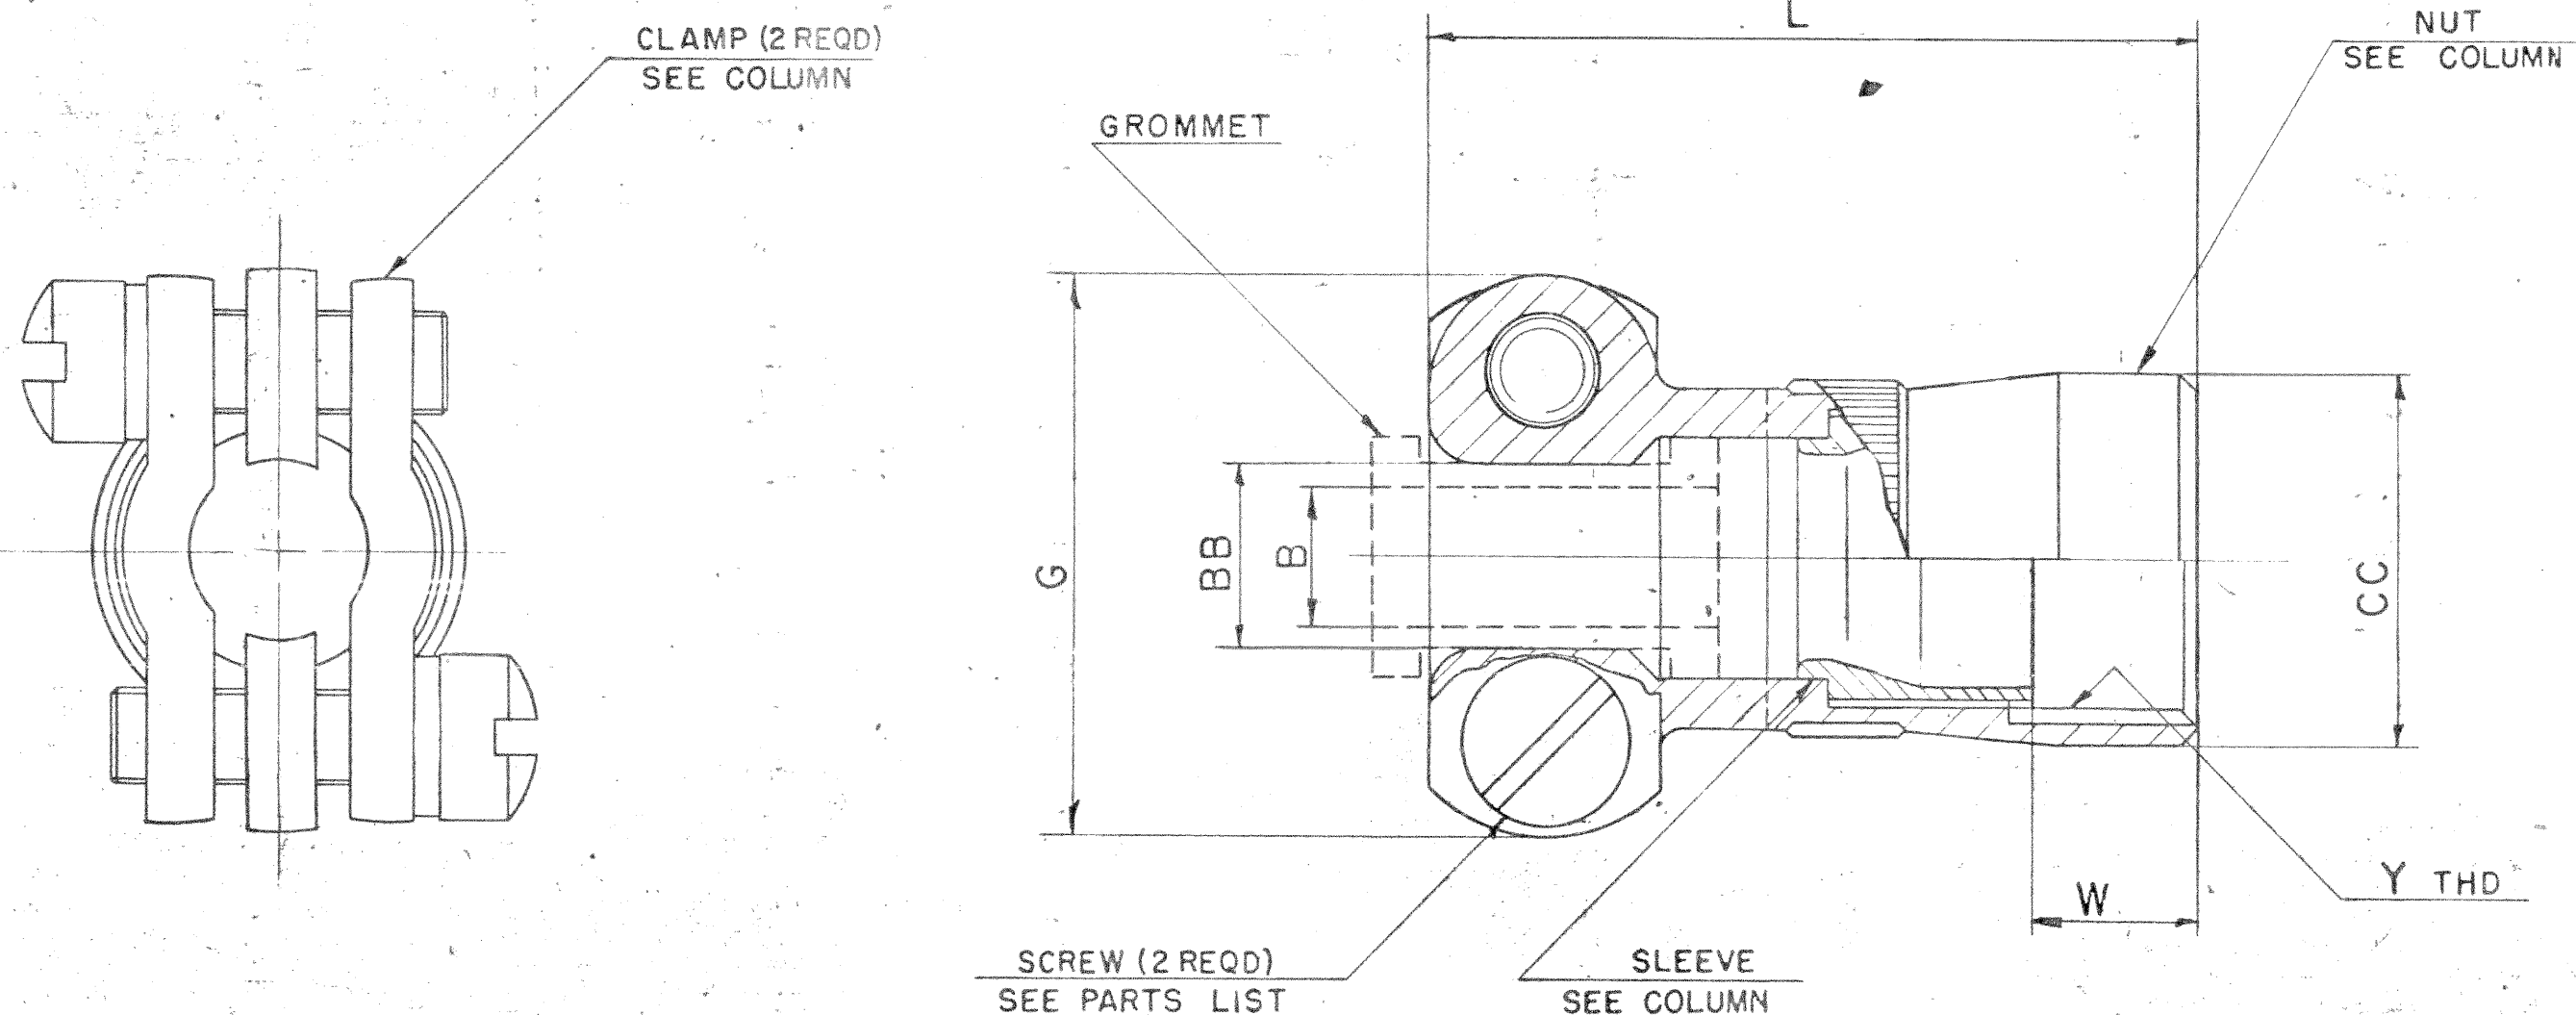

10-189010

I. TO COMPLETE ASSEMBLY NO. AND DETAIL NO. ADD APPLICABLE LAST DIGIT SUFFIX NO. FOR DESIRED FINISH!

CHROMATE TREAT
BRIGHT CADMIUM PLATE
BLACK ANODIZE
CADMIUM PLATE OLIVE DRAB
GRAY ANODIZE
ANODIC COATING

NICKEL CADMIUM
BRIGHT NICKEL
OLIVE DRAB CADMIUM PLATE NICKEL-BASE
NICKEL ALLOY PLATE

SUFFIX-XX0
SUFFIX-XX1
SUFFIX-XX2
SUFFIX-XX3
SUFFIX-XX4
SUFFIX-XX5

SUFFIX-XX7
SUFFIX-XX8
SUFFIX-XX9
SUFFIX-XXG

RELEASE
38524-1428
35508-87

38536-358
43524-279
47524-1035

USE OF THIS DOCUMENT IS UNLIMITED. DOCUMENTS REFERENCED HEREON CONTAIN LIMITED RIGHTS DATA.

MATERIAL SPEC.		PROCESS SPEC.		SCINTILLA MAGNETO DIVISION BENDIX AVIATION CORPORATION SIDNEY, N. Y., U.S.A.				TOLERANCES UNLESS OTHERWISE SPECIFIED	
HEAT TREAT SPEC.		FINISH SPEC.		NAME CLAMP ASSEMBLY CABLE STRAIN RELIEF, ELECTRICAL CONNECTOR, TYPE CE ()				DECIMALS 72-191.000/24 & OTHERS SEE PARTS LIST	
MANLEY	HORTON	BY DS	CH. CLMAN	APPROVED	DATE	10-101971		10-189010	
10-24-58		11-12-58		11-21-58		11-21-58			

NOTES: REF SYMBOL