20MM ILLUMINATED CAPACITIVE SWITCH (MOMENTARY)

Electronics

3323-57

Features:

- High brightness, full RGB illumination of touch area.
- Momentary, solid state switch output.
- Cable assembly available separately.
- Self adhesive, suitable for panel thickness up to 7mm.




Description:

These illuminated, capacitive touch switches are a revolutionary design eliminating the need for panel cut-outs and the worry of ingress protection. When using these switches all you need to factor in when designing the panel lay out, is the position of the switches and the size of switches you require. Any glass, clear acrylic, plastic or similar panel sheet can be printed with your required design and these units simply stick to the back. The switch works through the panel giving full RGB illumination with an unmatched uniformity of illumination.

Specification		
Part Code	3323-57	
Supply Voltage	6VDC to 24VDC	
Outputs	Switch output 40mA (momentary) Red LED 20mA max Green LED 20mA max Blue LED 20mA max	
Operating Temperature	0°C to 50°C	
Storage Temperature	0°C to 70°C	
Illumination *	Red, 290 cd/m ² Green, 655 cd/m ² Blue, 160 cd/m ² *Typical Values	

Mechanical Data:

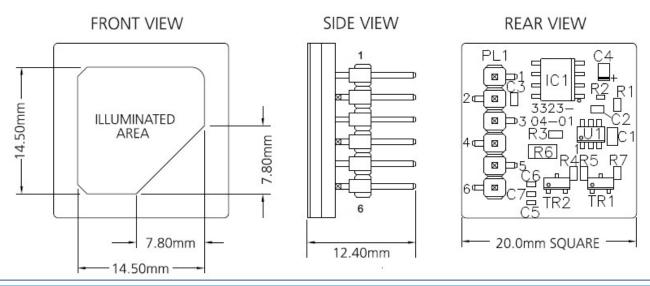

General Note

20MM ILLUMINATED CAPACITIVE SWITCH (MOMENTARY)




3323-57

Diagrams


Electrical Outputs:

PL1	Function	Notes
Pin 1	Supply +ve	+6VDC to +24VDC
Pin 2	Supply GND	GND
Pin 3	Switched Output	Up to 40mA max source. Voltage as supply voltage
Pin 4	Green LED Output	20mA max
Pin 5	Red LED Output	20mA max
Pin 6	Blue LED Output	20mA max


FRONT VIEW



SIDE VIEW



REAR VIEW



20MM ILLUMINATED CAPACITIVE SWITCH (MOMENTARY)



3323-57

Circuit Diagram

