

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

76055-1624

Status:

Active

Overview:

Impact™ Backplane Connectors and Cable Assemblies

Description:

Impact™ 100 Ohm 5 Pair Vertical Backplane Header, Unguided, Dual Endwall, 16 Columns, 240 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.46mm, Lead-Free

Documents:

3D Model

Drawing (PDF)

Product Specification PS-76060-999 (PDF)

Application Specification AS-76060-990 (PDF)

RoHS Certificate of Compliance (PDF)

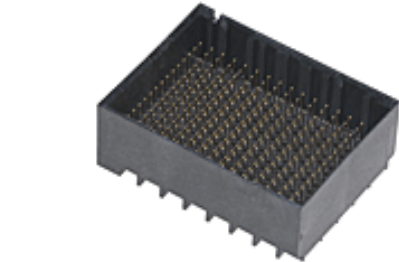


image - Reference only

Series

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76055
Application	Conventional, Mezzanine
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
UPC	883906411657
Physical	
Circuits (Loaded)	240
Circuits (maximum)	240
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.670/g
Number of Columns	16
Number of Pairs	5
Number of Rows	15
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76055Series

Mates With

76060 Impact™ 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Backplane Insertion	0621005800
Tool for Signal	
Contact	
Backplane Press-In	0622018665
Tool for 5-Pair by 16-Column Assemblies	

Current - Maximum per Contact	0.75A	Backplane Header	<u>0621009610</u>
Data Rate	25.0 Gbps	Removal Tool for	
Impedance	100#	GbX-U™, I-Trac™,	
Shield Type	N/A	Impact™, or TinMan	
Shielded	No	Impact™ Backplane	<u>0622018873</u>
Voltage - Maximum	30V AC (RMS)/DC	Press-In Tool	
Material Info			
Reference - Drawing Numbers			
Application Specification	AS-76060-990		
Product Specification	PS-76060-999		
Sales Drawing	SD-76055-001		
Symbol/Footprint Data	SYM-76055-1624		

This document was generated on 05/29/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION