


Model 2970 Triple Banana Plug



**Model 2970
Triple Banana Plug**

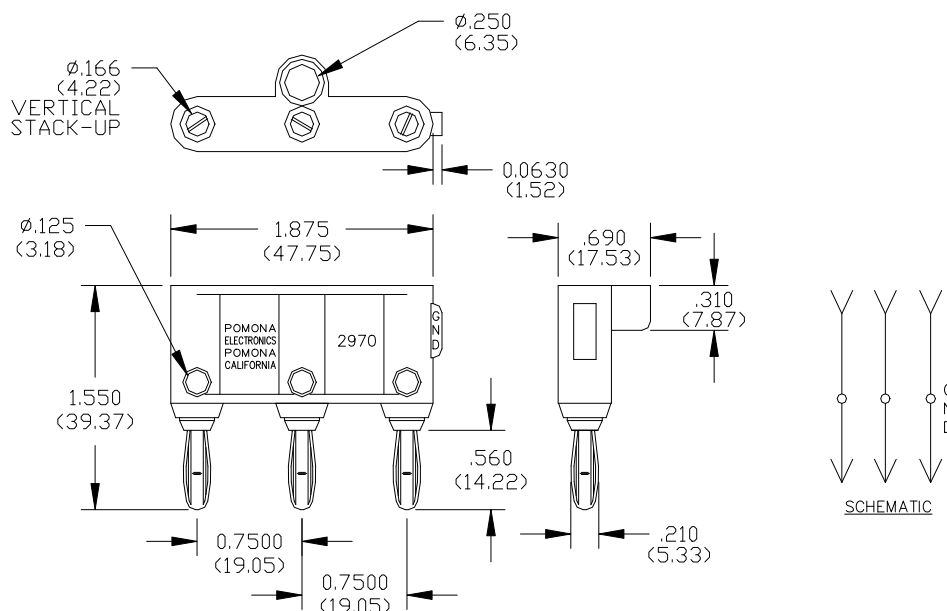

Features

- Set screws secure leads.
- Ideal for balanced line 2 conductor shielded cable assemblies.

Materials

Banana Jacks:

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.
 Finish: Nickel plate per QQ-N-290, Class 2, (.0002/.0003).

Banana Plugs:

Body: Brass per QQ-B-626, Alloy 360, ½ Hard.
 Spring: Beryllium Copper per QQ-C-533, Alloy 172, Cond. H.T.
 Finish: Nickel plate per QQ-N-290, Class 2, (.0002/.0003).

Insulation:

Material: Polypropylene molded to Banana Jack and Banana Plug bodies.

Marking: "POMONA ELECTRONICS, POMONA CALIF., 2970"

Cross holes: 3.18mm (.125") dia. With #8-32 slotted set screw to secure lead wires.

Specifications

Operating Voltage:

Hands free usage in controlled voltage environments: 5000 Vrms maximum.

For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.

Current: 15 Amperes

Ordering Information

Model: 2970-*

*=Color, -0 (Black), -2 (Red)

Ordering Example: 2970-2 (Triple Banana Plug with Red insulation)

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.