



Main

Range of product	Zelio Relay
Product or component type	Solid state relay
Device short name	SSM
Number of channels	1
Phase	1 phase

Complementary

Mounting support	Symmetrical DIN rail
Line Rated Current	6 A
Output voltage	1...60 V DC
[Uc] control circuit voltage	4...32 V DC
Contacts type and composition	1 NO
Tightening torque	Input : 0.5...0.8 N.m Output : 0.5...0.8 N.m
Connections - terminals	Screw terminals : 1 x 0.3...1 x 1.5 mm ² , (AWG 22...AWG 16) input Screw terminals : 1 x 0.3...1 x 2.5 mm ² , (AWG 22...AWG 14) output
Capacitance unbalance	<= 10 pF input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED green input status
Minimum switching voltage	4 V DC turn-on
Maximum switching voltage	1 V DC turn-off
Input current limits	8...11 mA
Solid state output type	Mosfet output DC switching
Load current	0.0025...6 A
Absolute maximum voltage	60 V
Surge current	<= 60 A 10 ms
Voltage drop	<= 0.6 V on-state
Resistance	0.1 Ohm on-state
Leakage current	<= 0.1 mA off-state
Response time	0.6 ms turn-on 0.3 ms turn-off
Overvoltage category	III
Width	0.43 in (11 mm)
Height	90.3 mm
Depth	83.7 mm
Product weight	0.11 lb(US) (0.05 kg)

Environment

flame retardance	V0 conforming to UL 94
dielectric strength	4 kV DC input/output 4 kV DC input or output to case
pollution degree	2
standards	IEC 61000

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


IEC 60950-1
IEC 62314

product certifications	CSA UL REACH
marking	CE
IP degree of protection	IP20
ambient air temperature for operation	-22...176 °F (-30...80 °C)
ambient air temperature for storage	-22...212 °F (-30...100 °C)


Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 1328 - Schneider Electric declaration of conformity	Compliant - since 1328 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Available	Available
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Dimensions

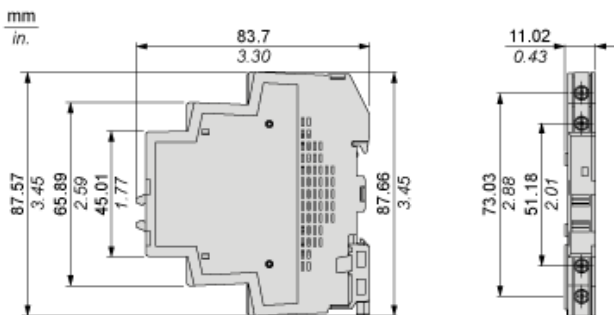

Derating Curves

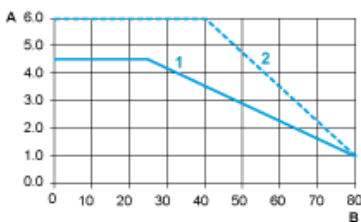

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 11 mm