

DESCRIPTION

The DC2347A contains only those functions necessary to safely program and verify the [LTC2937](#) configuration EEPROM. It serves no other purpose. The DC2347A holds the LTC2937 in a clamshell socket for convenient access and replacement of parts. The LTpowerPlay™ GUI software, running on a PC, provides a simple interface to program and verify the EEPROM with a user supplied configuration.

What Can You Do with The DC2347A

- Program the contents of the EEPROM with your project or HEX file.
- Verify the contents of the EEPROM against your project or HEX file.
- Verify the contents of the EEPROM against factory defaults.

Demo System Hardware Required

- Microsoft Windows PC
- DC1613 USB to I²C/SMBus/PMBus Controller
- DC2347A Programming Board

Demo System Software Required

- LTpowerPlay (GUI)

The LTpowerPlay software can be downloaded from:

<http://www.linear.com/ltpowerplay>

To access technical support documents for LTC Power System Management Products visit "Help -> View Online Help" in the LTpowerPlay menu.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2347A>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks and LTpowerPlay is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

FEATURES

DC2347A


- Program and Verify EEPROM for the LTC2937
- Easily Change Parts with the Clamshell Socket
- Simple Interface to the PC Using LTpowerPlay
- Powered by the USB Connection

LTC2937

- Time and Event-Based Power Supply Sequencing
- 12 Programmable Undervoltage and Overvoltage Comparators with 0.75% Accuracy
- Stalled Power Supply Detection

- Single Wire Synchronization Allows Controller Expansion to 50 Devices (300 Power Supplies)
- Configuration and Fault Logging in EEPROM
- EEPROM Rated to 85°C, 10k writes, 20 year Retention
- Supported by LTpowerPlay GUI
- Fault and System Status Registers
- Reset Output with Programmable Delay
- I²C/SMBus Interface
- Wide Input Supply Voltage Range: 2.9V to 16.5V
- 28-Pin QFN (5mm × 6mm) Package

BOARD PHOTO

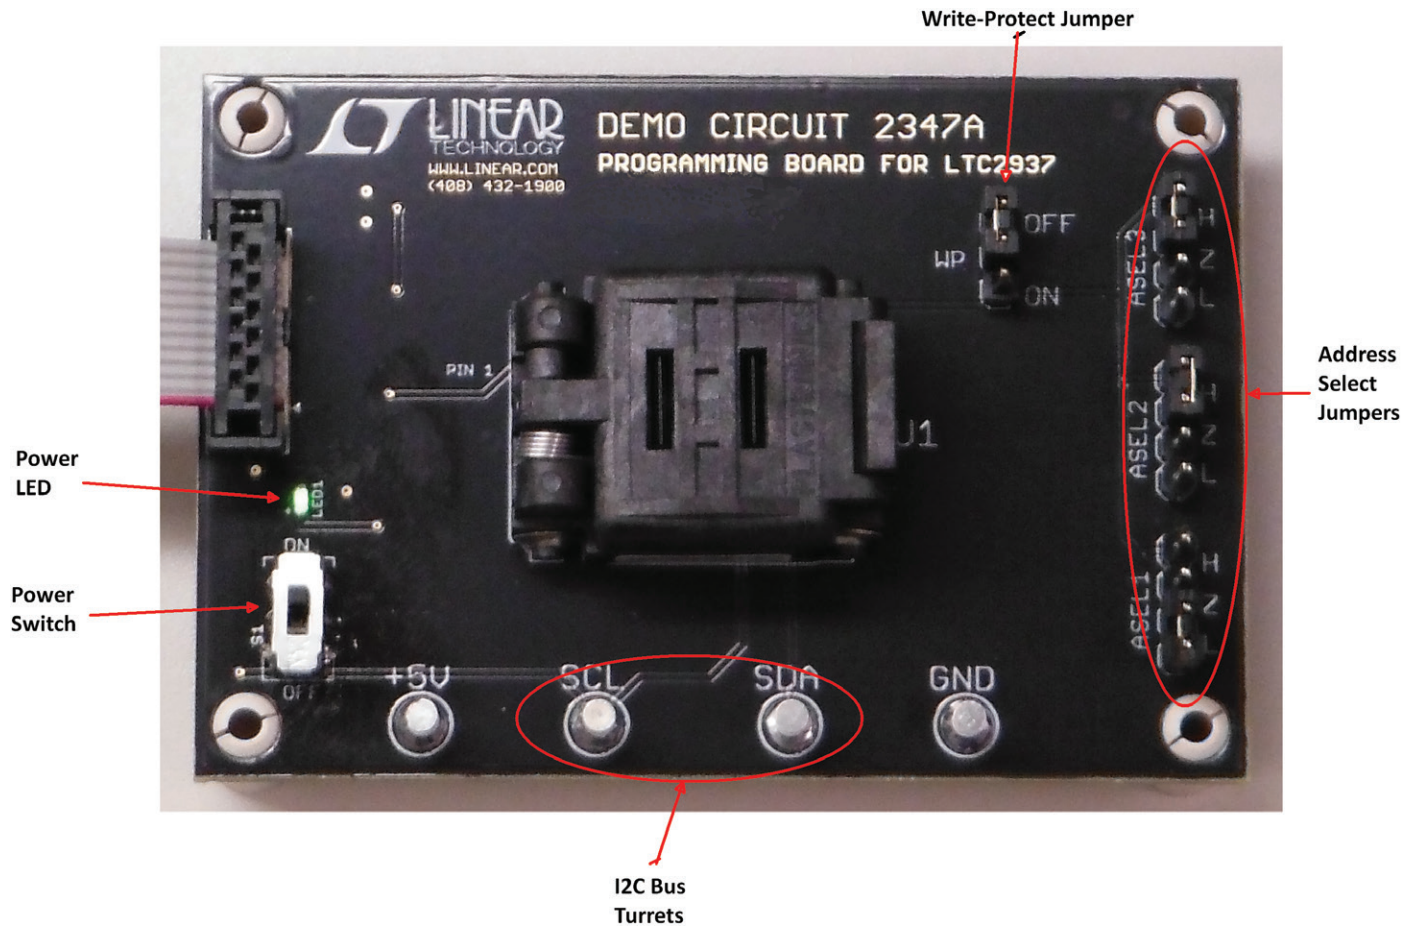

QUICK START PROCEDURE

The DC2347A system makes it easy to program and verify the contents of the LTC2937.

1. Download and install the LTpowerPlay GUI:

<http://www.linear.com/ltpowerplay>

2. Remove the DC2347A board from the ESD protective bag and place it on a level surface. Connect the DC1613 I²C/SMBus/PMBus Controller to the DC2347A board using the 12-pin ribbon cable.


Set the jumpers ASEL1, ASEL2, and ASEL3 for the desired device I²C address. Note that each project file contains a fixed device address, which must match the ASEL jumper settings on the board. See the LTC2937 data sheet for a discussion of device addressing.

Set the WP jumper to OFF.

Set the POWER switch to OFF.

3. Connect the USB-to-I²C/SMBus/PMBus Controller to a USB port on your PC.
4. Insert an LTC2937 part into the clamshell socket and verify that it is upright and not upside-down in the socket. Close the lid; it will snap shut. Only remove and replace ICs in the socket when the POWER switch is OFF.
5. Apply power to the device by sliding the POWER switch to ON. When the part receives power it powers-up its 3.3V VDD pin, and LED1 will illuminate green. If no part is installed in the socket, or if the part is up-side down, the LED will not illuminate, and programming is not possible.
6. Launch the LTpowerPlay GUI. The GUI automatically identifies the DC2347A and launches the appropriate interface protocol.

7. If the Programming Utility does not launch automatically, select LTpowerPlay→Utilities→Programming Utility from the menu.
8. Click “...” and select a project file to program the device. Ensure that the ASEL jumpers match the device address in the project file.

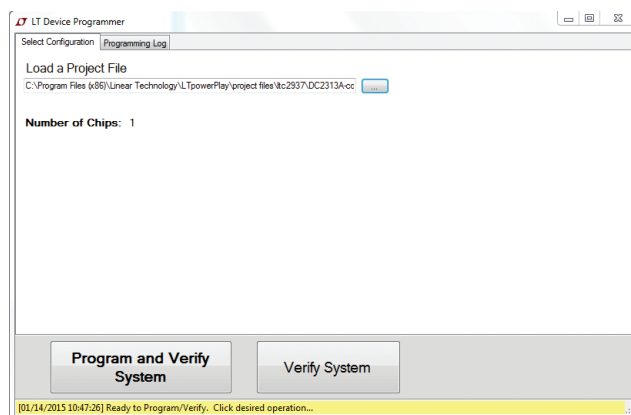


9. Click “Program and Verify System” to program the device. Upon success, the status bar at the bottom will turn from yellow to green and indicate “Successfully Programmed and Verified System!”
10. After programming the LTC2937, set the POWER switch to OFF and remove the part from the socket. Repeat steps 4 to 9 with additional LTC2937 parts as necessary.

DEMO MANUAL DC2347A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	3	C4, C12	CAP, CER, 100nF, X5R, 16V, 10%, 0603	MURATA, GRM188R61C104KA01D
2	1	C13	CAP, CER, 2.2 μ F, X5R, 16V, 10%, 0603	MURATA, GRM188R61C225KE15D
3	1	C1	CAP, CER, 1 μ F, X5R, 16V, 10%, 0603	MURATA, GRM188R61C105KA93D
4	1	R3	RES, 1.3k, 1/10W, 1%, 0603	VISHAY, CRCW06031K30FKEA
5	5	R1, R2, R5, R6, R7	RES, 10k, 1/16W, 1%, 0603	VISHAY, CRCW060310K0FKED
6	9	R4, R8, R9, R10, R11, R12, R13, R14, R15	RES, 0.0 Ω , 1/10W, 0603	VISHAY, CRCW06030000Z0EA
7	1	LED1	LED, GREEN, 0603	PANASONIC, LNJ326W83RA
8	4	TP1, TP2, TP3, TP4	TEST POINT TURRET, 0.094"	MILL-MAX, 2501-2-00-80-00-00-07-0
9	3	ASEL1, ASEL2, ASEL3	CONN, HEADER, 1x4, 0.1"	SULLINS, PRPC004SAAN-RC
10	1	WP	CONN, HEADER, 1x3, 0.1"	SULLINS, PRPC003SAAN-RC
11	4	WP, ASEL1, ASEL2, ASEL3	SHUNT JUMPER, 0.1"	3M, 969002-0000-DA
12	1	J1	CONN, HEADER, 2x6, 2MM	FCI, 98414-G06-12ULF
13	1	U4	IC SERIAL EEPROM, SOT-23-5	MICROCHIP, 24AA02T-I/OT
14	1	U1	SOCKET, CLAMSHELL, QFN	PLASTRONICS, 28QN50S16050-A
15	1	S1	SW SLIDE DPDT 6VDC 0.3A PCMNT	C&K COMPONENTS, JS202011CQN
16	4		STANDOFF, NYLON, SNAP-ON, 0.25" TALL	KEYSTONE, 8831

SCHEMATIC DIAGRAM

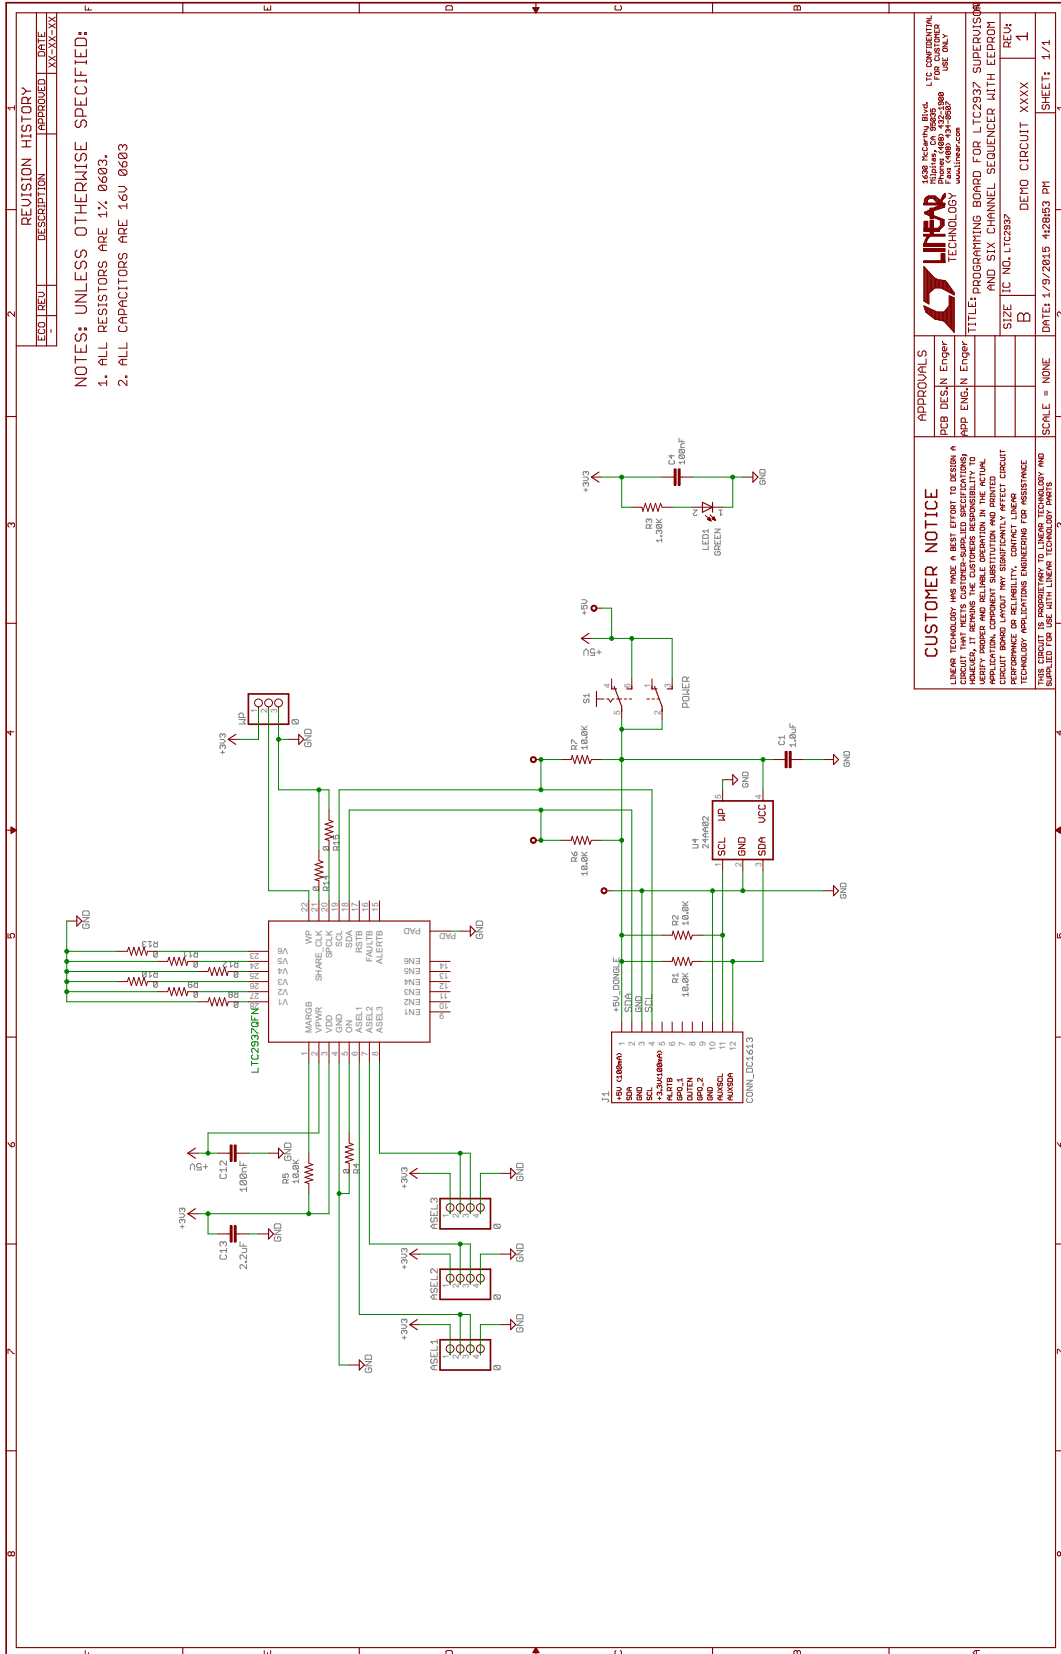

REV	DESCRIPTION	DATE
XX-XX-XX		

REVISION HISTORY

NOTES: UNLESS OTHERWISE SPECIFIED:
 1. ALL RESISTORS ARE 1% 0603.
 2. ALL CAPACITORS ARE 16V 0603

CUSTOMER NOTICE
 LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A BOARD THAT MEETS CUSTOMER-SPECIFIED SPECIFICATIONS. HOWEVER, THE ACTUAL PERFORMANCE OF THE BOARD MAY VARY FROM THE SPECIFICATIONS DUE TO MANUFACTURING VARIATIONS, COMPONENT SUBSTITUTION AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. CUSTOMERS ARE ADVISED THAT THE BOARD IS NOT A REPRESENTATIVE OF LINEAR TECHNOLOGY'S PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERS FOR ASSISTANCE.
 THIS CIRCUIT IS PRINTING ON A LINEAR TECHNOLOGY BOARD. IT IS NOT A LINEAR TECHNOLOGY BOARD.

APPROVALS
 PCB DES: JN Engler
 APP ENG: JN Engler

TITLE: PROGRAMMING BOARD FOR LTC2937 SUPERVISOR AND SIX CHANNEL SEQUENCER WITH EEPROM

SIZE: IC NO. LTC2937
 B
 DATE: 1/9/2015 4:28:53 PM
 SCALE: NONE
 SHEET: 1/1

LINEAR TECHNOLOGY
 100 N. RAVENHILL BLVD
 FOLSOM, CA 95630
 TEL: 916.444.0000
 FAX: 916.444.0001
 WWW.LINEAR.COM



Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

DEMO MANUAL DC2347A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation