

CORE DIMENSIONS:


A	25.91 [1.020]	+	0.70 [.028]
B	13.06 [.514]	+	0.45 [.018]
C	28.58 [1.125]	+	0.64 [.025]
D	12.95 [.510]	+	0.40 [.016]

**UNCONTROLLED
DOCUMENT**


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	130 Ω	280 Ω	440 Ω
Minimum	- Ω	224 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

(Z)

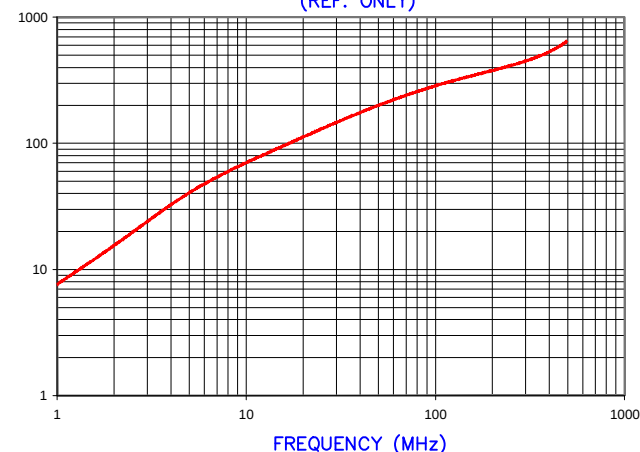

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF 3158

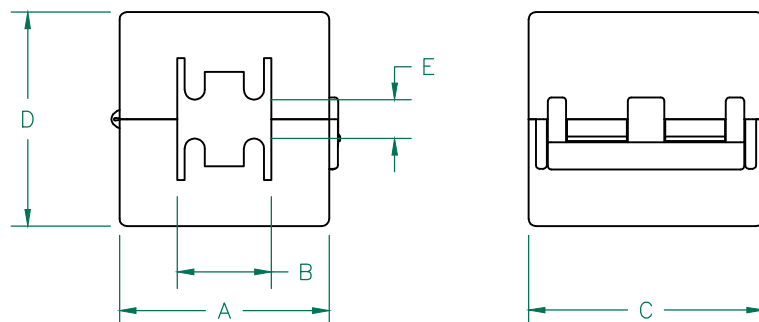

NOTES:

- ASSEMBLED PART #: 28A2024-0A0
- CASE COLOR: WHITE.

CASE DIMENSIONS:

A	29.00 [1.142]	+	REF.
B	13.00 [.512]	+	REF.
C	32.50 [1.280]	+	REF.
D	29.62 [1.166]	+	REF.
E	5.64 [.222]	+	REF.

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird™		
T	UPDATE CORE TOL	12/23/15	Jcai					
S	UPDATE 100 MHz MINIMUM VALUE CORRECT CASE DIM "B" TOLERANCE SYMBOL	06/07/07	TMB					
R	UPDATE COMPANY LOGO	04/18/07	TMB					
Q	CHANGE CASE TOLERANCES TO REF. UPDATE "D" DIM ON CASE AND ADD E DIM TO CASE REMOVE CORE & CASE P/N REFERENCE REVISE NOTES	08/24/06	TMB					
				PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
				28A2024-0A0		T	FERRITE SNAP ON	JAZ
P	CHANGE P/N FROM 0A*, ADD REF # UPDATE NOTES AND Z SPECS	06/28/04	JRK	DATE: 01/08/93		SCALE: NTS		MATERIAL: FERRITE
REV	DESCRIPTION	DATE	INT	CAD # 28A2024-0A0-T		TOOL # -		

Laird