

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [76015-1115](#)  
**Status:** **Active**  
**Overview:** GbX I-Trac™ Backplane Connector System  
**Description:** GbX I-Trac™ Vertical Header Module, 1.85mm by 3.70mm Pitch, Unguided, Left End Wall, 7 Rows, 10 Columns, 140 Circuits, Staggered Mating Pin Length 4.70mm & 5.70mm, Lead-Free

**Documents:**  
[3D Model](#) [Product Specification PS-75710-999 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

UL E29179

**General**

Product Family Backplane Connectors  
Series [76015](#)  
Application Backplane, Midplane, Orthogonal  
Component Type PCB Header  
Overview [GbX I-Trac™ Backplane Connector System](#)  
Product Name GbX I-Trac™  
Style N/A  
UPC 800756928852

**Physical**

Circuits (Loaded) 140  
Circuits (maximum) 140  
Color - Resin Black  
Durability (mating cycles max) 200  
First Mate / Last Break Yes  
Flammability 94V-0  
Guide to Mating Part No  
Keying to Mating Part None  
Material - Metal High Performance Alloy (HPA)  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
Net Weight 5.545/g  
Number of Columns 10  
Number of Pairs 4, Open Pin Field  
Number of Rows 7  
Orientation Vertical  
PC Tail Length 2.10mm  
PCB Locator No  
PCB Retention None  
PCB Thickness - Recommended 1.60mm  
Packaging Type Tray  
Pitch - Mating Interface 1.85mm, 3.70mm  
Pitch - Termination Interface 1.00mm, 2.70mm  
Plating min - Mating 0.762µm  
Plating min - Termination 0.762µm  
Polarized to PCB No  
Stackable No  
Surface Mount Compatible (SMC) Yes  
Temperature Range - Operating 85°C  
Termination Interface: Style Through Hole - Compliant Pin

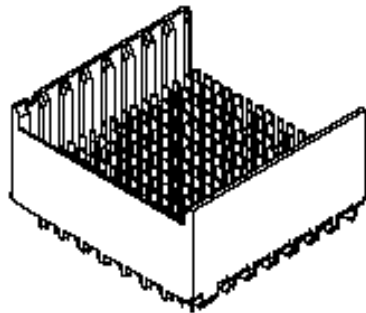


image - Reference only

Series

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
**Contains SVHC: No**  
**Low-Halogen Status**  
**Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[76015Series](#)

**Mates With**  
[76020](#) GbX I-Trac™ Right Angle Receptacle Module

**Use With**  
[78227](#) GbX I-Trac™ Vertical Power Receptacle. [75234](#) Backplane Free Standing Guide Pin

**Application Tooling | FAQ**  
*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

| Global Description  | Product #                  |
|---------------------|----------------------------|
| Backplane Insertion | <a href="#">0621005110</a> |
| Tool for Signal     |                            |
| Contact Insertion   |                            |

**Electrical**

|                               |                  |
|-------------------------------|------------------|
| Current - Maximum per Contact | 1A               |
| Data Rate                     | 12.0 Gbps        |
| Shield Type                   | N/A              |
| Shielded                      | No               |
| Voltage - Maximum             | 120V AC (RMS)/DC |

**Material Info**

**Reference - Drawing Numbers**

|                       |              |
|-----------------------|--------------|
| Product Specification | PS-75710-999 |
| Sales Drawing         | SD-76015-001 |

This document was generated on 08/14/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**