

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0740612503
Status: Active
Overview: vhdm
Description: 2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 4.25mm (.167")

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Backplane Connectors
Series	74061
Application	Backplane
Application Tooling Documents	Tooling Manual
Comments	No Keying Position
Component Type	PCB Header
Overview	vhdm
Product Name	VHDM®
Style	N/A
Physical	
Circuits (Loaded)	200
Circuits (maximum)	200
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic
Number of Columns	N/A
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length (in)	0.098 In
PC Tail Length (mm)	2.50 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.070 In
PCB Thickness Recommended (mm)	1.80 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	30
Plating min: Termination (µm)	0.75
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes



Series

image - Reference only

EU RoHS
Not RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
74061Series

Mates With
74040 VHDM® Board-to-Board Daughtercard Receptacle

Application Tooling FAQ <i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i>	
Global	
Description	Product #
VHDM® Signal Pin	0622015700
Insertor Repair Tool	
VHDM® 8 Row Pin	0622015900
and Shield Repair Tool	
VHDM® 8 Row	0622016100
Shield Extraction Tool	
VHDM® Insertion	0622020206
Module for Advanced	

Temperature Range - Operating	105°C max	Mate Signal Header,
Termination Interface: Style	Through Hole - Compliant Pin	6 Row by 25 Wide,
Electrical		50.00mm (1.97")
Current - Maximum per Contact	1A	VHDM® Insertion <u>0622020210</u>
Data Rate	3.125 Gbps	Module for Standard
Real Signals (per 25mm)	100	Shield Signal
Shield Type	Ground Plane Shield	Header, 8 Row by
Shielded	Yes	25 Wide, 50.00mm
Voltage - Maximum	120V AC (RMS)/DC	(1.97")
Material Info		Flat Rock Tooling for <u>0622013700</u>
		Pneumatic Press
Reference - Drawing Numbers		
Sales Drawing	SD-74061-002	
VHDM and Very High Density Metric are trademarks of Amphenol Corporation		

This document was generated on 06/01/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



BACKPLANE HOLE PATTERN RECOMMENDED DIMENSION

NOTES:

1. MATERIALS:

HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN & SHIELD - COPPER ALLOY

2. FINISHES:

CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.

3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-74031-999

4. FOR MIXED CONTACT LENGTHS CONSULT MOLEX FOR AVAILABILITY

5. FOR SPECIFIC MATERIAL NUMBERS & MATING INFORMATION REFER TO SHEET 2









6. PACKAGE PER PK-74061-003

7. EITHER MARK PART WITH PART NUMBER & DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE LABEL ON THE TUBE.



CORRECTED DIMS EC NO: UCP2008-0329 DRWN: JONI AK 2007/08/28 CHKD: JONI AK 2007/08/28 APPR: CBIXLER 2007/08/28		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						MM ONLY		2.5:1	METRIC			
							</					

F

M/N 74061-()	-**0*	-**1*	-**2*	-**3*	-**4*	-**5*	-**6*	-**7*	-**8*
	O	A	B	C	D	E	F	G	H
KEYING PIN ORIENTATION									

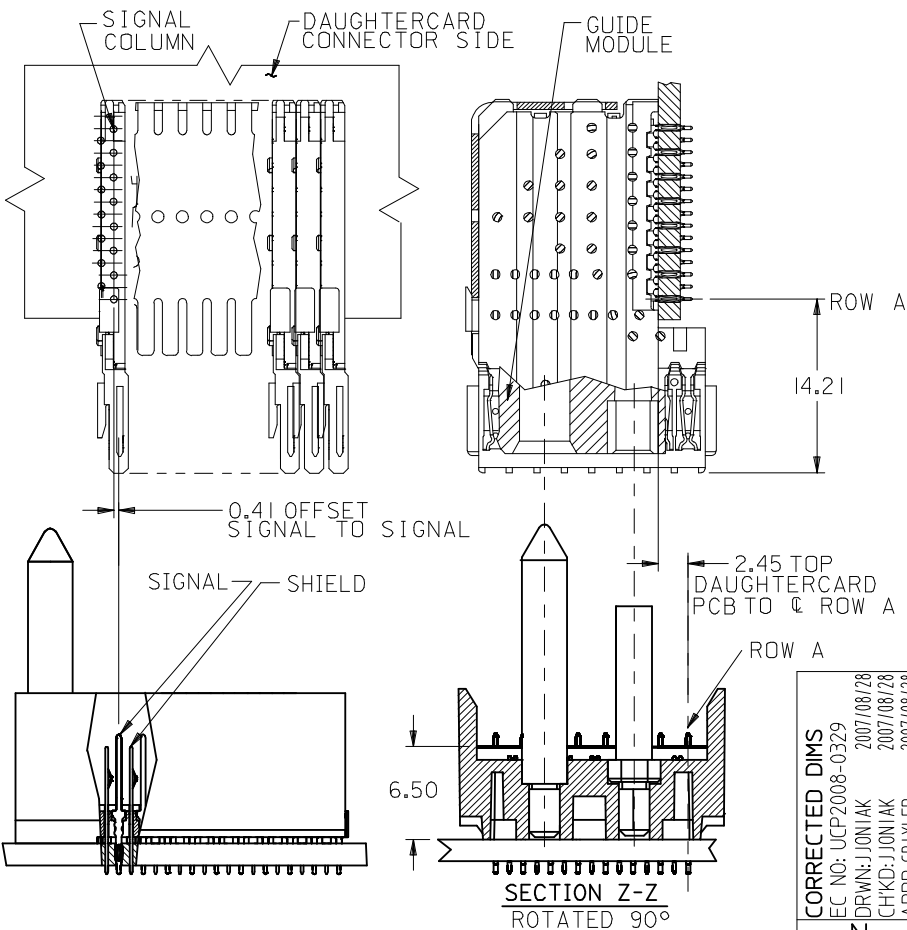
74061 - * * * *

NUMBER OF COLUMNS/PLATING
 10 = 10 COLUMN TIN/LEAD
 12 = 12 COLUMN TIN/LEAD*
 25 = 25 COLUMN TIN/LEAD
 90 = 10 COLUMN MATTE TIN
 92 = 12 COLUMN MATTE TIN*
 85 = 25 COLUMN MATTE TIN

CONTACT LOAD
 (PIN LENGTH)
 1 & 6 = 4.75
 2 & 7 = 6.25
 3 & 8 = 4.25
 4 & 9 = 5.15

*12 COLUMN P/N'S ON SHEET 3

E



PART NUMBER	COLUMN	NUMBER OF SIGNAL	NUMBER OF PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74061-0*1	10	80	10	10	27.00	18.00	4.75	0.76	0.76-1.52
74061-0*6								1.27	
74061-5*1	25	200	25	25	57.00	48.00	6.25	0.76	
74061-5*6								1.27	
74061-0*2	10	80	10	10	27.00	18.00	4.25	0.76	
74061-0*7								1.27	
74061-5*2	25	200	25	25	57.00	48.00	5.15	0.76	
74061-5*7								1.27	
74061-0*3	10	80	10	10	27.00	18.00	4.25	0.76	
74061-0*8								1.27	
74061-5*3	25	200	25	25	57.00	48.00	4.75	0.76	
74061-5*8								1.27	
74061-0*4	10	80	10	10	27.00	18.00	5.15	0.76	
74061-0*9								1.27	
74061-5*4	25	200	25	25	57.00	48.00	4.25	0.76	
74061-5*9								1.27	

B

A

CORRECTED DIMS EC NO: UCP2008-0329 DRWN: JIONIAK 2007/08/28 CHKD: JIONIAK 2007/08/28 APPR: CBIXLER 2007/08/28 REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2°	DIMENSION STYLE MM ONLY DRAWN BY DATE MWANG 1998/11/09 CHECKED BY DATE JLAURX 1998/11/09 APPROVED BY DATE CBIXLER 1998/11/09 MATERIAL NO.	SCALE 2.5:1 TITLE VHDM 8 ROW SIGNAL END BACKPLANE SALES ASSEMBLY MOLEX INCORPORATED DOCUMENT NO. SD-74061-002 SHEET NO. 2 OF 3

DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

SEE CHART
 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION