

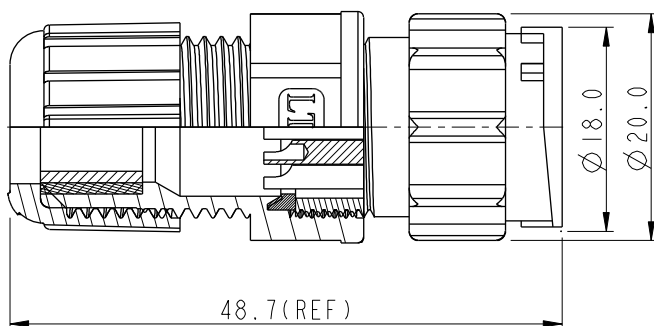

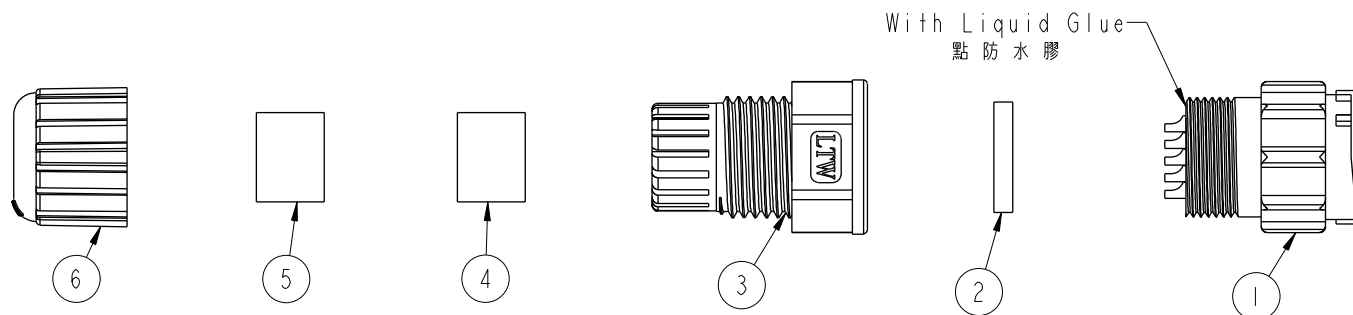


REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Pin Assignments
Front View

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate : IP67
- * Seal B1 for Cable OD: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$
(防水墊圈B1線徑: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$)
- * Seal B2 for Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$
(防水墊圈B2線徑: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * Housing: Black, Nylon+GF
- * Male Pin: Copper Alloy, Gold Plated
- * Gasket: Black, EPDM
- * Clamp Ring: Black, Nylon
- * Seals1: Black, EPDM
- * Seals2: Black, EPDM
- * Sealing Nut: Black, Nylon
- * Liquid Glue: Clear

UNIT: mm		TITLE		ITEM NO.		DRAWN BY		DATE	
		Circular Middle Size		CD-12BMMA-LL7001		SamChang		2012-04-16	
		12Pin (5A) F Conn Lock For Assy		DWG NO		CHECKED BY		DATE	
				CD-12BMMA-LL7001		Jeffrey		2012-05-31	
				CUSTOMER		APPROVED BY		DATE	
				ALTW		Lion		2012-05-31	

TOLERANCE
.X ± 0.25
.XX ± 0.1
.XXX ± 0.05
ANGLES $\pm 1^\circ$

SCALE
1:1

SIZE
A4

SHEET
1 OF 1

REV.
A

WC-REV.
A.2

QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司