
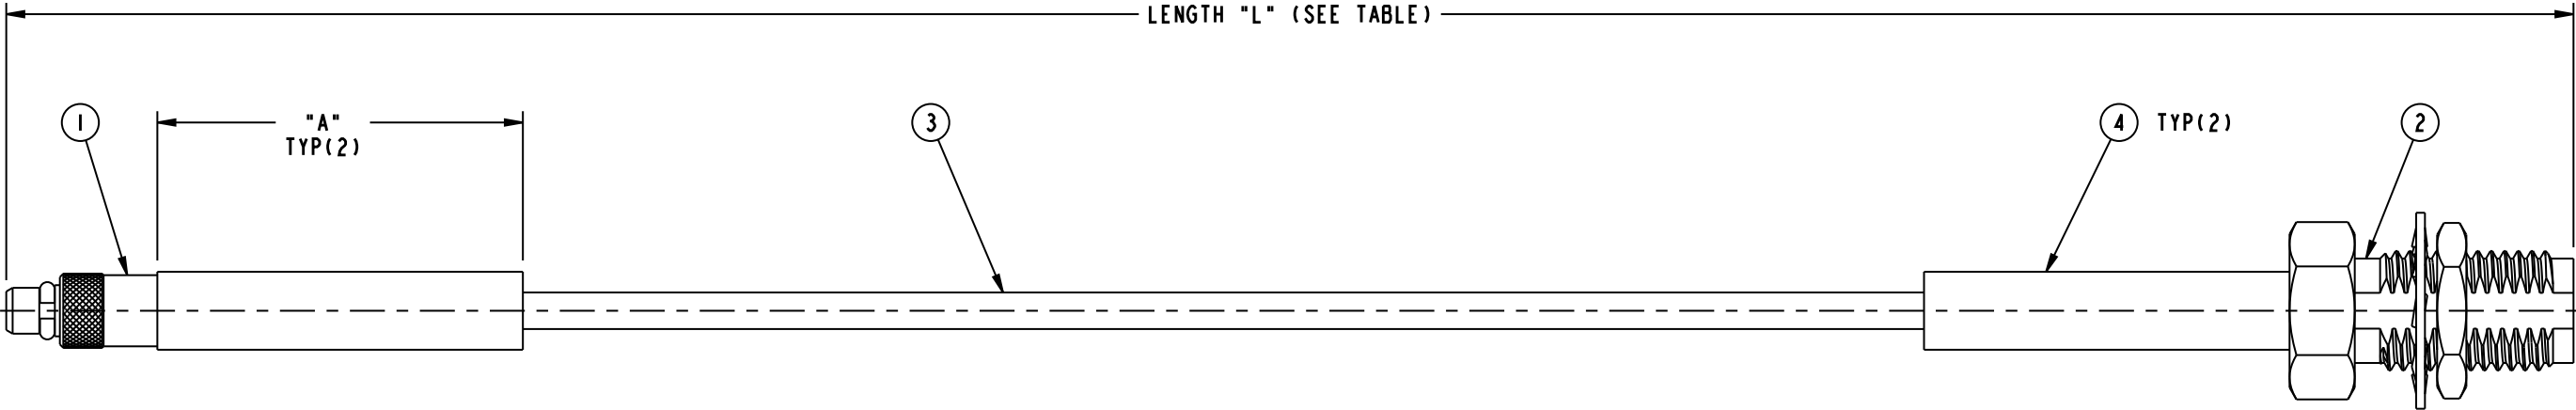


NOTES:

1. PACKAGE INDIVIDUALLY IN HEAT SEALED BAG. TAG IN BAG WITH "AMPHENOL CONNEX, 245107-02-XX.XX AND DATE CODE".

2. CABLE ASSEMBLY TO BE 100% TESTED FOR HI-POT,CONTINUITY,SHORTS AND OPEN.

245107-02-XX.XX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	02-Aug-10	--	CL

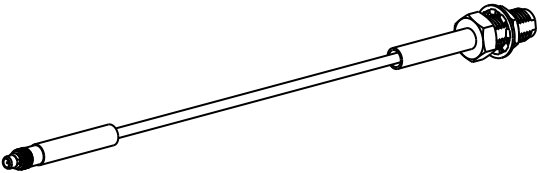

LENGTH TABLE		
PART NUMBER	LENGTH (IN.)	DIMENSION A (IN.)
245107-02-06.00	06.000±0.150	0.750
245107-02-12.00	12.000±0.150	0.750
245107-02-18.00	18.000±0.150	0.750
245107-02-24.00	24.000±0.250	2.000

* ADDITIONAL LENGTHS CAN BE PROVIDED
BY CHANGING XX.XX TO DESIRED LEGNTH IN INCHES
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

☐ FREQUENCY _____ TO _____ GHz	☒ CONTINUITY
☐ VSWR _____ : 1 MAX	☒ HI-POT : 500 VRMS
☐ INS. LOSS _____ dB MAX	☐ OTHER

009-954-341	A/R	4	HEAT SHRINK TUBE	
009-881-159	A/R	3	RG-174 CABLE	
132119	I	2	SMA BLKHD CRIMP JACK	
262101	I	1	MMCX CRIMP PLUG	
PART NUMBER	QTY	ITEM	DESCRIPTION	FINISH

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ±.015 (0,381 mm) ±.005 (0,127 mm) ANGLES ± 1°	MATERIAL	DRAWN CLEMENT	DATE 02-Aug-10	TITLE MMCX CRIMP PLUG TO SMA BLKHD CRIMP JACK, USING, RG-174 CABLE, XX.XX" LENGTH		Amphenol Connex	
		ENGINEER CLEMENT	DATE 02-Aug-10				
	REFERENCE	APPROVED	DATE	SCALE: 2.7:1		SHEET 1 OF 1	
		CAD FILE Root folder:/Cable assembly/ 245107-02-XX.XX		DWG SIZE B	DRAWING NO. 245107-02-XX.XX		REV A