


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0764501627](#)
Status: **Active**
Overview: [Impact™ Backplane Connectors and Cable Assemblies](#)
Description: Impact 100 Ohm 2 Pair Right-Angle Male Header, Unguided, Dual Endwall, 16 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead Free

Documents:
[Drawing \(PDF\)](#) [Application Specification AS-76060-9999-001 \(PDF\)](#)
[Product Specification PS-76060-999-001 \(PDF\)](#) [Packaging Specification PK-70873-077-001 \(PDF\)](#)
[Application Specification AS-76060-990-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Backplane Connectors
Series	76450
Application	Orthogonal Direct
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact
Style	N/A
UPC	887191898711
Physical	
Circuits (Loaded)	96
Circuits (maximum)	96
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	17.118/g
Number of Columns	16
Number of Pairs	2
Number of Rows	6
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω

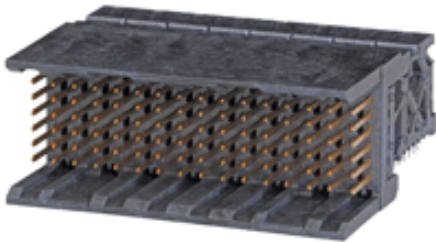

Series image - Reference only

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - ED/71/2019 (16 July 2019) Halogen-Free Status Low-Halogen For more information, please visit Contact US	China RoHS Green Image Not Relevant Not Contained
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[76450](#) Series

Mates With
[76460](#) Impact 100 Ohm Daughtercard

Application Tooling FAQ <i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i>	
Global	
Description	Product #
Press-in-Tool for Daughter Card	622018779
Signal Module, 2-Pair by 16-Column Assemblies	
Impact Right-Angle Module Removal Tool (RAM)	622024350

Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-76060-990-001, AS-76060-9999-001
Electrical Model Document	EE-76450-002, EE-76450-50G
Packaging Specification	PK-70873-077-001
Product Specification	PS-76060-999-001
S-Parameter Model	SP-76450-002, SP-76450-50G
Sales Drawing	SD-76450-001-001
Symbol/Footprint Data	SYM-76450-1608

This document was generated on 09/17/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION