




LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		2		DRAWING CREATED BY AUTOMATION PROGRAM	05JAN2011	JKS	JE	
		A		RELEASED	28FEB2012	BC	DY	

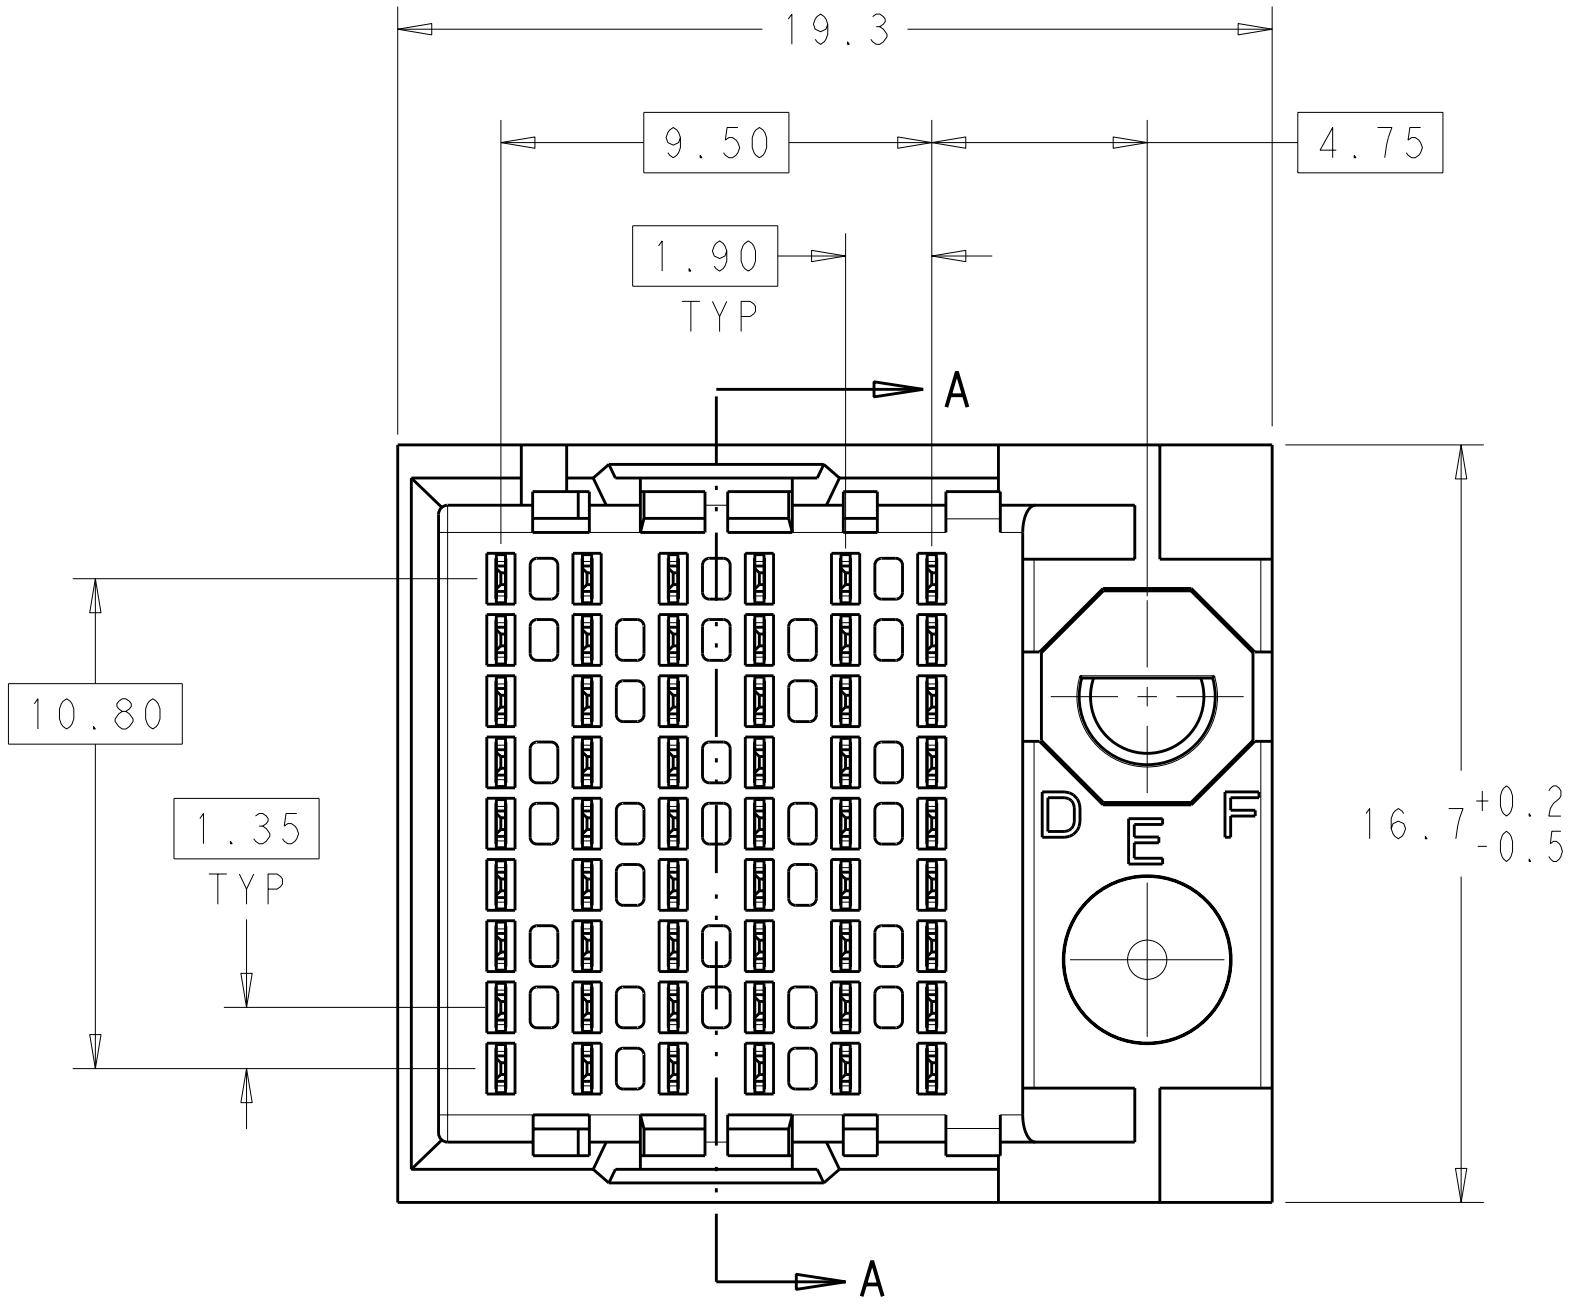



NOTCH DESIGNATES ROW A

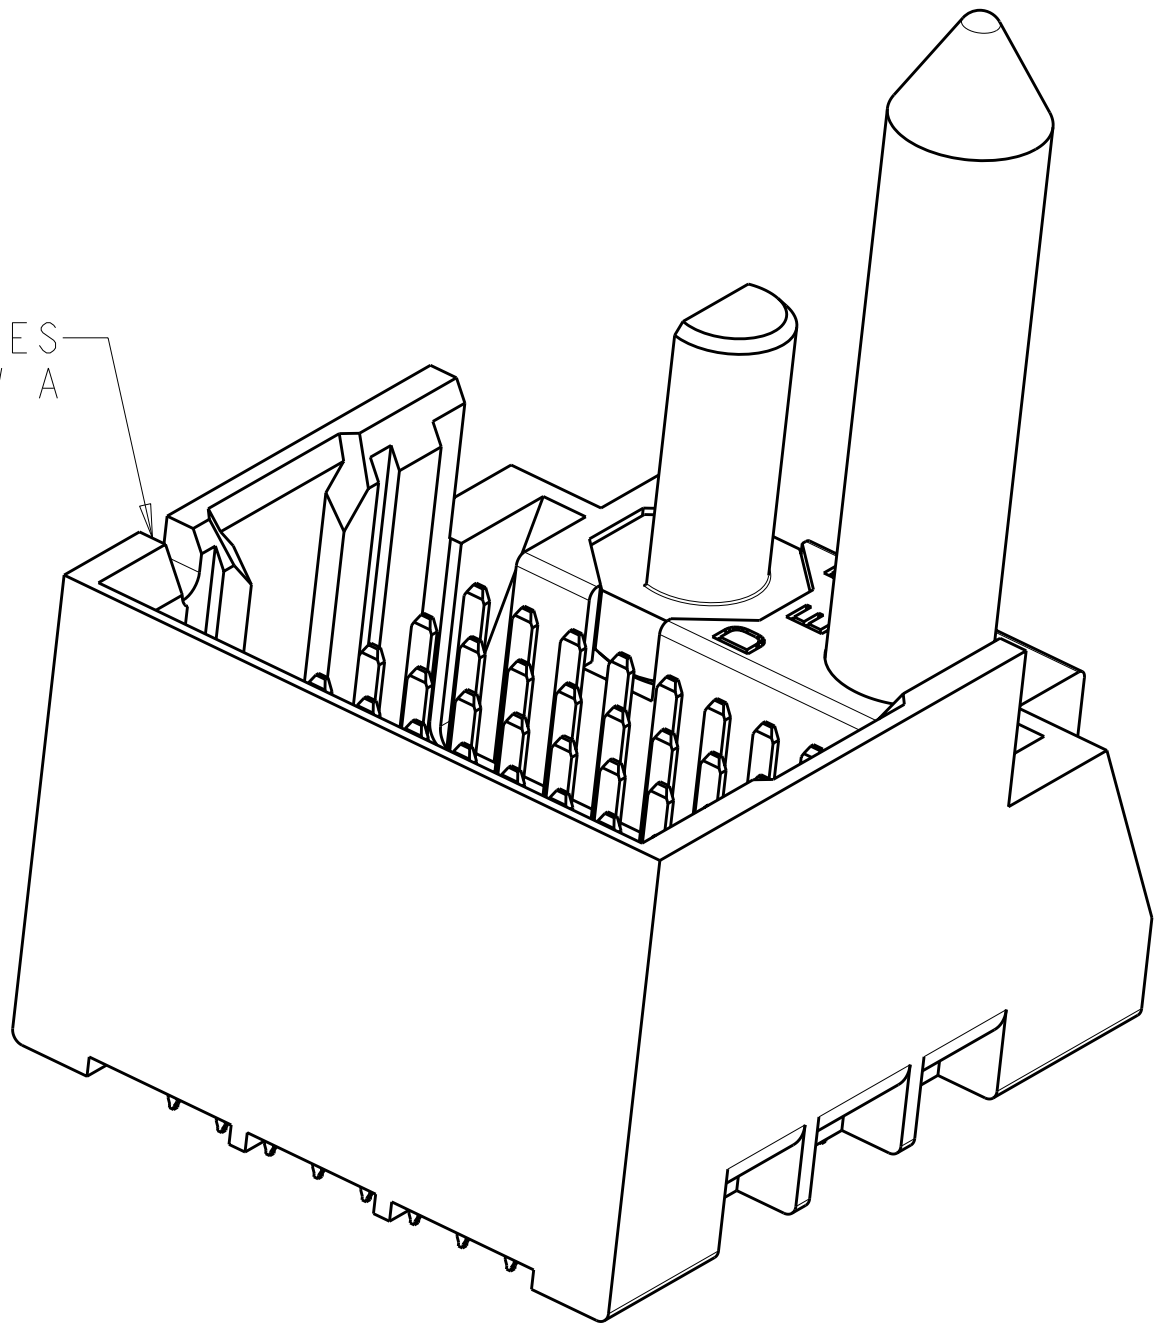

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.
6. KEYING PIN SHOWN IN POSITION A. SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

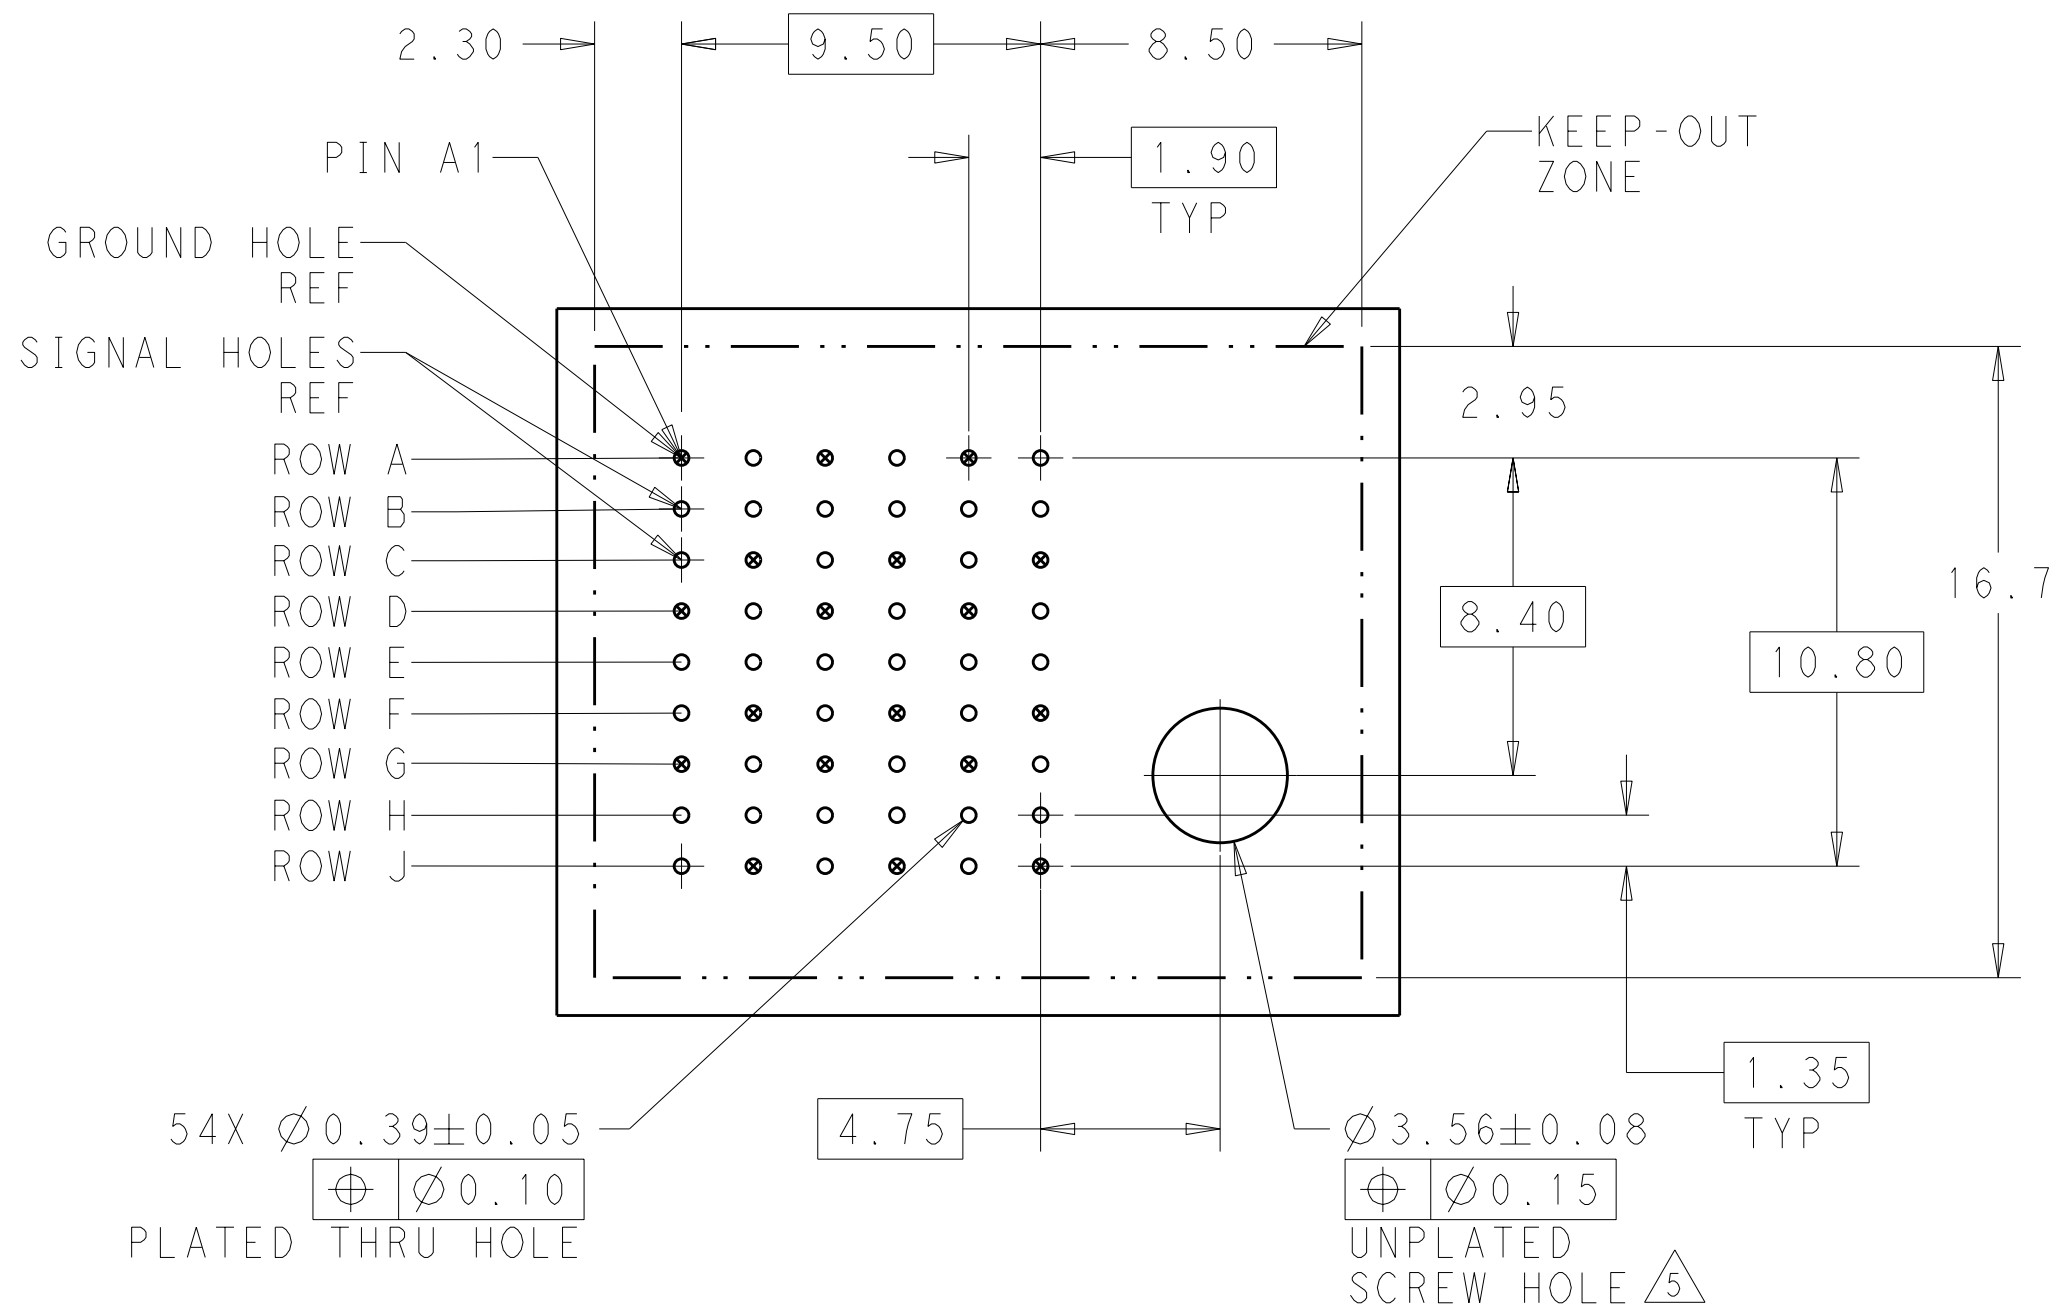

RIGHT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

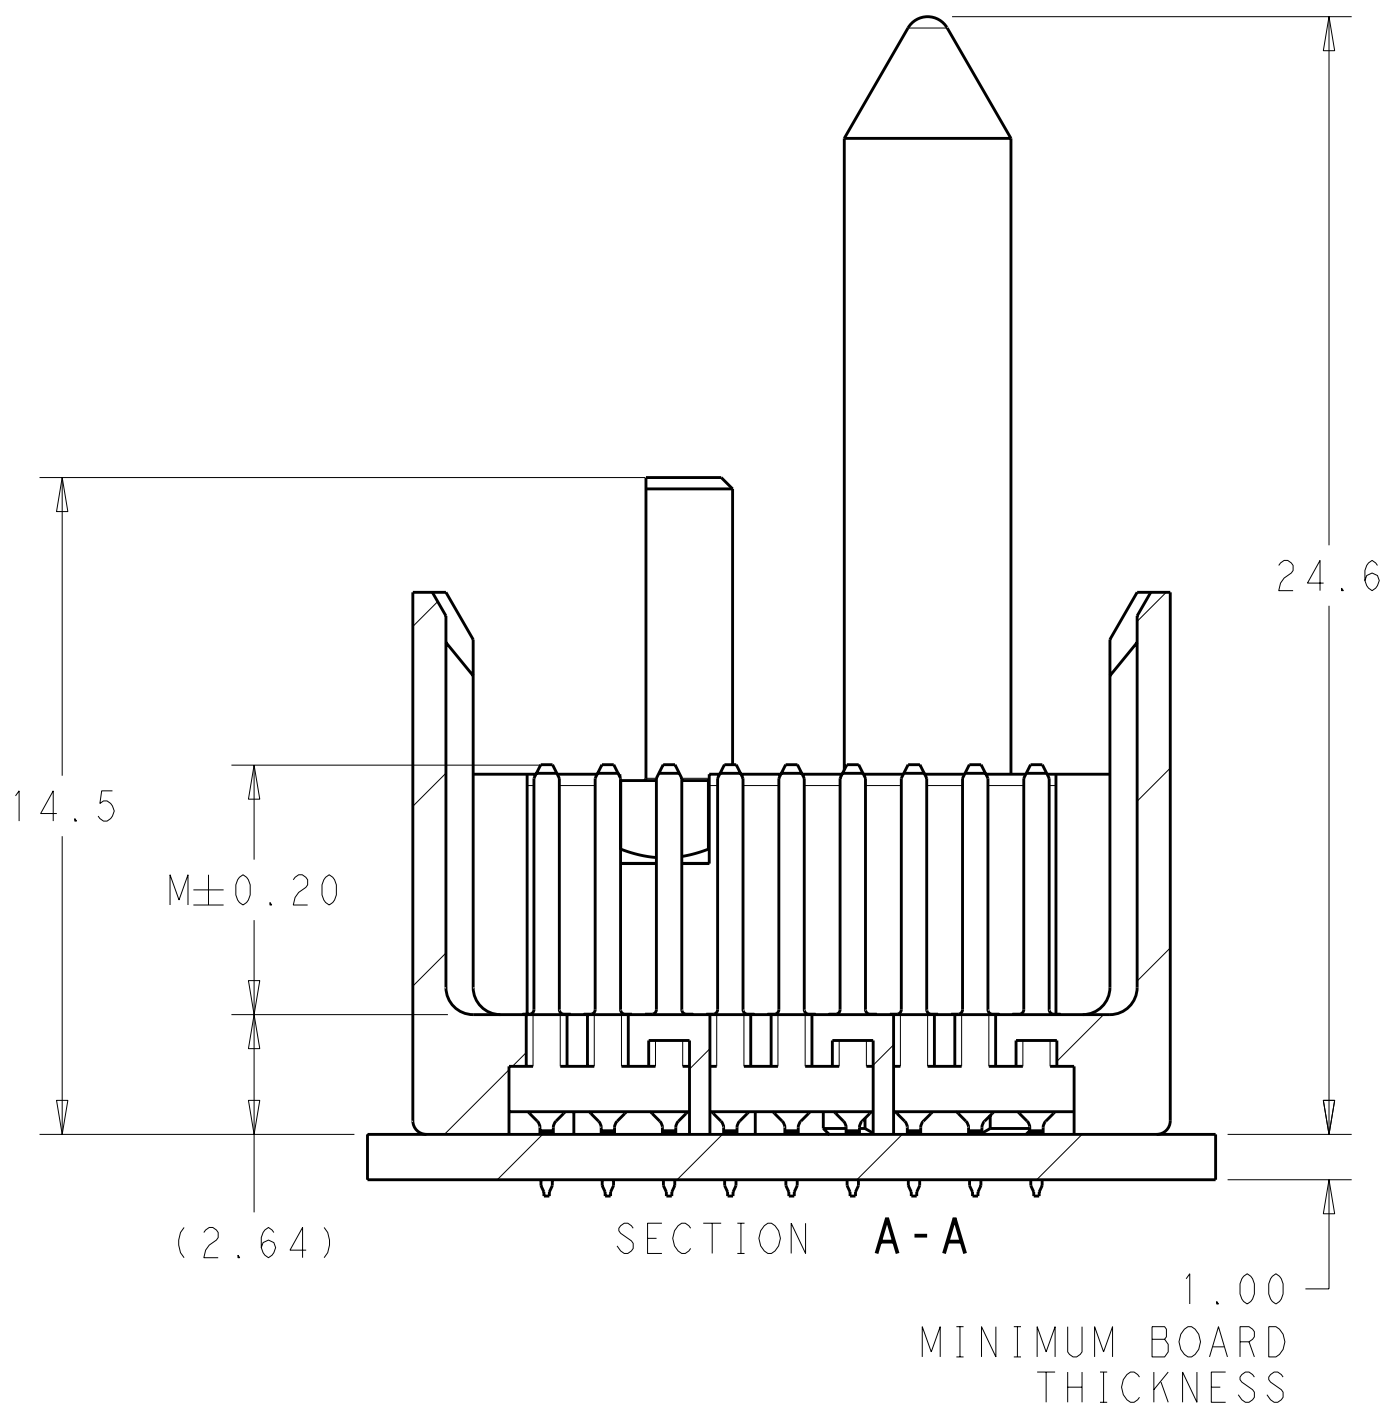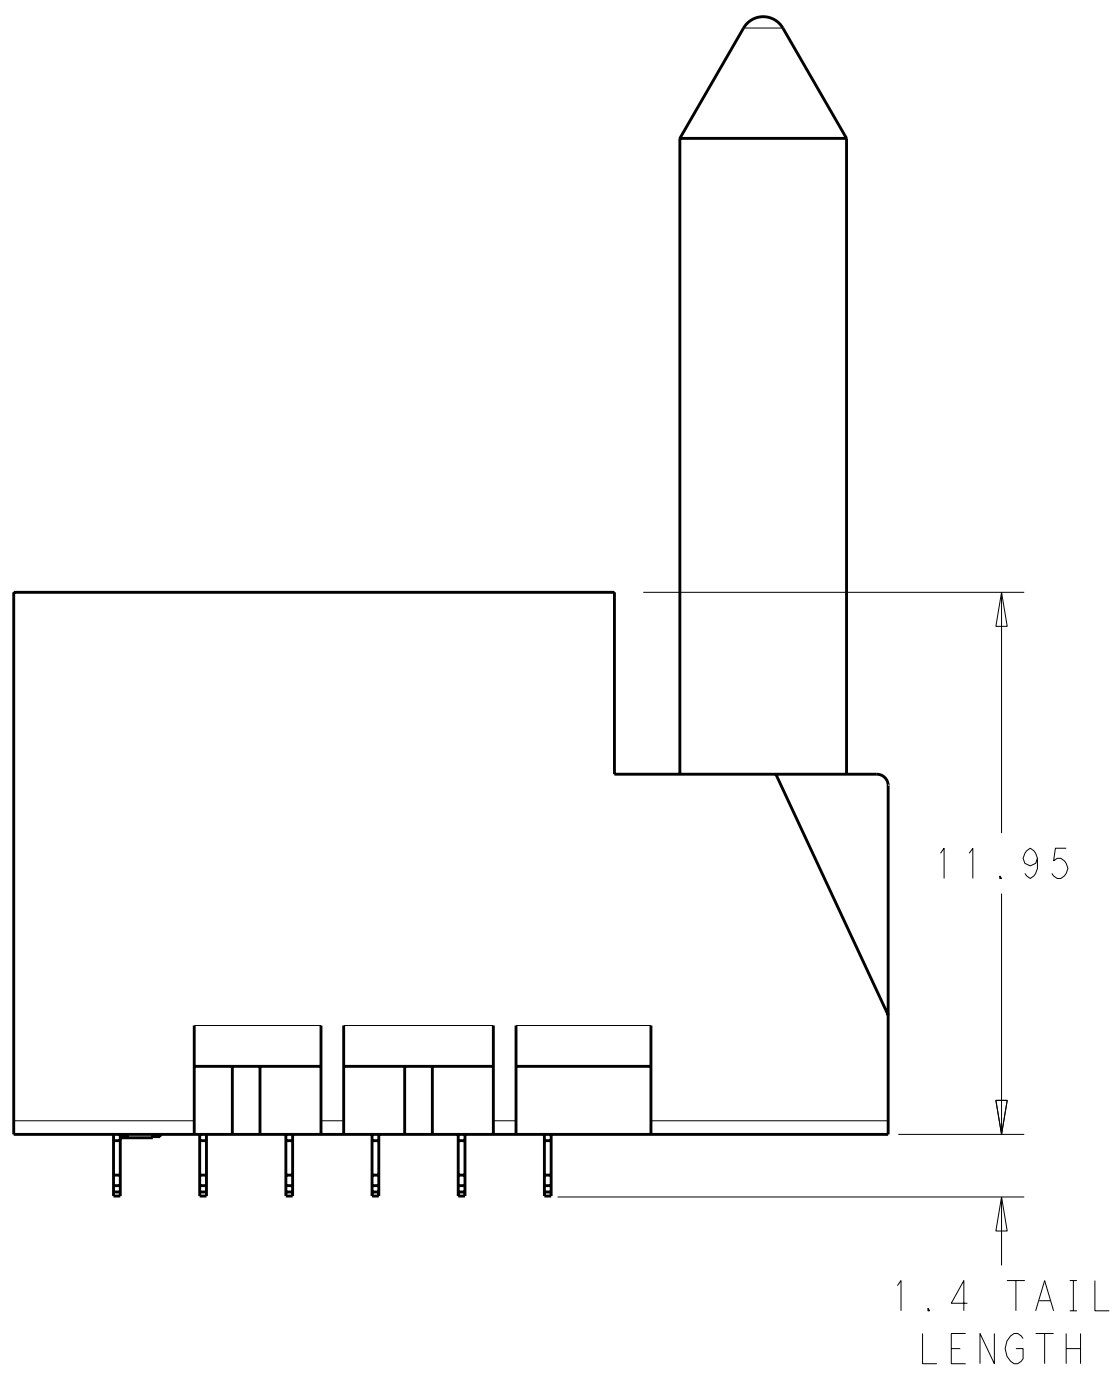

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 05JAN2011	TE Connectivity	
DIMENSIONS:		CHK J. EABY 05JAN2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EABY 05JAN2011	NAME	
mm		PRODUCT SPEC	IMPACT, 3 PAIR, 6 COLUMN, HEADER	
9 PLC ±		APPLICATION SPEC	RIGHT GUIDED, LEFT END WALL	
1 PLC ±0.25		WEIGHT	SIGNAL MODULE, 0.39 PTH	
2 PLC ±0.13		CUSTOMER DRAWING	SIZE CAGE CODE DRAWING NO	
3 PLC ±		SCALE 6:1	SHEET 1 OF 2	
4 PLC ±		REV A	RESTRICTED TO	
ANGLES ±				
FINISH SEE TABLE				

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	OWN	APVD
				-	-	SEE SHEET 1	-	-	-

	H	5.5	8-2132533-6
	H	4.9	8-2132533-5
	H	4.5	8-2132533-4
	H	5.5	8-2132533-3
	H	4.9	8-2132533-2
	H	4.5	8-2132533-1
	G	5.5	7-2132533-6
	G	4.9	7-2132533-5
	G	4.5	7-2132533-4
	G	5.5	7-2132533-3
	G	4.9	7-2132533-2
	G	4.5	7-2132533-1
	F	5.5	6-2132533-6
	F	4.9	6-2132533-5
	F	4.5	6-2132533-4
	F	5.5	6-2132533-3
	F	4.9	6-2132533-2
	F	4.5	6-2132533-1
	E	5.5	5-2132533-6
	E	4.9	5-2132533-5
	E	4.5	5-2132533-4
	E	5.5	5-2132533-3
	E	4.9	5-2132533-2
	E	4.5	5-2132533-1
	D	5.5	4-2132533-6
	D	4.9	4-2132533-5
	D	4.5	4-2132533-4
	D	5.5	4-2132533-3
	D	4.9	4-2132533-2
	D	4.5	4-2132533-1
	C	5.5	3-2132533-6
	C	4.9	3-2132533-5
	C	4.5	3-2132533-4
	C	5.5	3-2132533-3
	C	4.9	3-2132533-2
	C	4.5	3-2132533-1
	B	5.5	2-2132533-6
	B	4.9	2-2132533-5
	B	4.5	2-2132533-4
	B	5.5	2-2132533-3
	B	4.9	2-2132533-2
	B	4.5	2-2132533-1
	A	5.5	1-2132533-6
	A	4.9	1-2132533-5
	A	4.5	1-2132533-4
	A	5.5	1-2132533-3
	A	4.9	1-2132533-2
	A	4.5	1-2132533-1
	-	5.5	2132533-6
	-	4.9	2132533-5
	-	4.5	2132533-4
	-	5.5	2132533-3
	-	4.9	2132533-2
	-	4.5	2132533-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H

THIS DRAWING IS A CONTROLLED DOCUMENT.			OWN	J. K. SHOBER	05JAN2011	TE Connectivity		
			CHK	J. EABY	05JAN2011			
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	IMPACT, 3 PAIR, 6 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH	
mm						APVD		
						J. EABY		
						PRODUCT SPEC		
						APPLICATION SPEC		
						WEIGHT		
MATERIAL						CUSTOMER DRAWING		
						SCALE	5:1	SHEET 2 OF 2
						REV	A	