



Both N.O. and N.C. contacts incorporated in a compact DIP8-pin Reinforced insulation

**PhotoMOS®
GE 1 Form A & 1 Form B
(AQW610EH)**

FEATURES

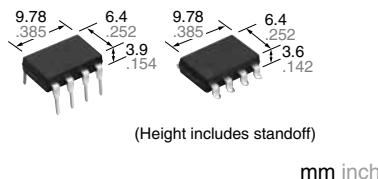

RoHS compliant

1. 60V type couples high capacity (0.5A) with low on-resistance (Typ. 1Ω).

2. Reinforced insulation 5,000 V

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

3. Approx. 1/2 the space compared with the mounting area of a set of 1 Form A and 1 Form B PhotoMOS

4. Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use

5. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

6. High sensitivity and high speed response

Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of Typ. 0.5 ms [N.O.] (AQW610EH).

7. Low-level off-state leakage current

TYPICAL APPLICATIONS

- Power supply
- Measuring instruments
- Security equipment
- Modem
- Telephone equipment
- Electricity, plant equipment
- Sensing equipment

TYPES

I/O isolation voltage		Output rating*		Package	Part No.			Packing quantity
					Through hole terminal		Surface-mount terminal	
		Load voltage	Load current		Tape and reel packing style		Tube	Tape and reel
AC/DC dual use	Reinforced 5,000 Vrms			DIP8-pin	Tube packing style	Picked from the 1/2/3/4-pin side		
	60 V	500 mA	AQW612EH		AQW612EHA	AQW612EHAX	AQW612EHAZ	
	350 V	120 mA	AQW610EH		AQW610EHA	AQW610EHAX	AQW610EHAZ	
	400 V	100 mA	AQW614EH		AQW614EHA	AQW614EHAX	AQW614EHAZ	

*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item	Symbol	AQW612EH(A)	AQW610EH(A)	AQW614EH(A)	Remarks
Input	LED forward current	I _F	50 mA		
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (peak AC)	V _L	60 V	350 V	
	Continuous load current	I _L	0.5 A (0.6 A)	0.12 A (0.14 A)	0.1 A (0.13 A) Peak AC, DC (): in case of using only 1a or 1b, 1 channel
	Peak load current	I _{peak}	1.5 A	0.36 A	0.3 A 100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}		800 mW	
Total power dissipation	P _T		850 mW		
I/O isolation voltage	V _{iso}		5,000 Vrms		
Ambient temperature	Operating	T _{opr}	-40 to +85°C -40 to +185°F		(Non-icing at low temperatures)
	Storage	T _{stg}	-40 to +100°C -40 to +212°F		

GE 1 Form A & 1 Form B (AQW61○EH)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW612EH(A)	AQW610EH(A)	AQW614EH(A)	Condition	
Input	LED operate current	Typical	$I_{For}(N.O.)$	1.4 mA		$I_L = \text{Max.}$	
		Maximum	$I_{For}(N.C.)$	3.0 mA			
	LED reverse current	Minimum	$I_{Forl}(N.O.)$	0.4 mA		$I_L = \text{Max.}$	
		Typical	$I_{Forl}(N.C.)$	1.3 mA			
Output	LED dropout voltage	Typical	V_F	1.25 (1.14 V at $I_F = 5 \text{ mA}$)		$I_F = 50 \text{ mA}$	
		Maximum		1.5 V			
	On resistance	Typical	R_{on}	1Ω	18Ω	26Ω	$I_F = 5 \text{ mA (N.O.) } I_F = 0 \text{ mA (N.C.)}$ $I_L = \text{Max.}$ Within 1 s
		Maximum		2.5Ω	25Ω	35Ω	
	Off state leakage current	Maximum	I_{Leak}	1μA (N.O.), 10μA (N.C.)			$I_F = 0 \text{ mA (N.O.) } I_F = 5 \text{ mA (N.C.)}$ $V_L = \text{Max.}$
Transfer characteristics	Operate time*	Typical	$T_{on}(N.O.)$ $T_{off}(N.C.)$	1.0 ms (N.O.) 3.0 ms (N.C.)	0.5 ms (N.O.) 1.0 ms (N.C.)	0.5 ms (N.O.) 0.8 ms (N.C.)	$I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$ $I_L = \text{Max.}$
		Maximum		4.0 ms (N.O.) 10.0 ms (N.C.)	3.0 ms		
	Reverse time*	Typical	$T_{off}(N.O.)$ $T_{on}(N.C.)$	0.05ms (N.O.), 0.2ms (N.C.)	0.08ms (N.O.), 0.3ms (N.C.)	0.08ms (N.O.), 0.2ms (N.C.)	$I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$ $I_L = \text{Max.}$
		Maximum		1.0ms			
	I/O capacitance	Typical	C_{iso}	0.8 pF			$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$
	Initial I/O isolation resistance	Minimum		1.5 pF			

*Operate/Reverse time

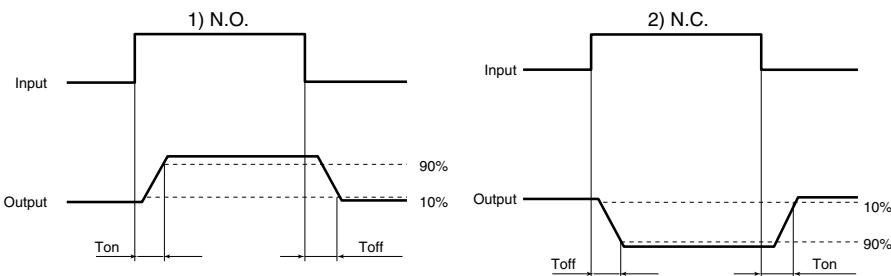

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
LED current	I_F		5	30	mA
	V_L		—	48	V
AQW612EH(A)	Load voltage (Peak AC)	V_L	—	—	—
	Continuous load current		1ch 2ch	0.6 0.5	A
AQW610EH(A)	Load voltage (Peak AC)	V_L	—	280	V
	Continuous load current		1ch 2ch	0.14 0.12	A
AQW614EH(A)	Load voltage (Peak AC)	V_L	—	320	V
	Continuous load current		1ch 2ch	0.13 0.1	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

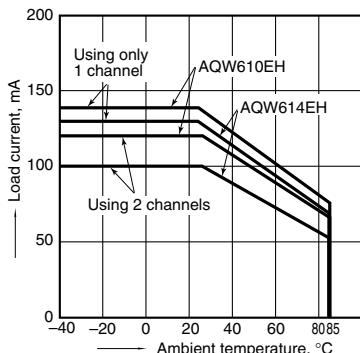


1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

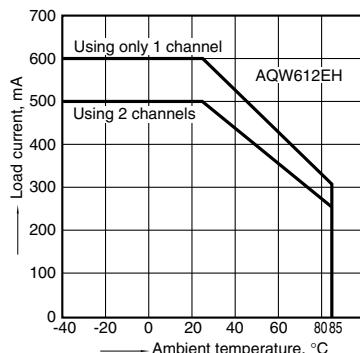


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

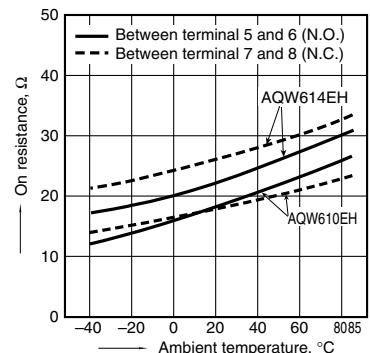


2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

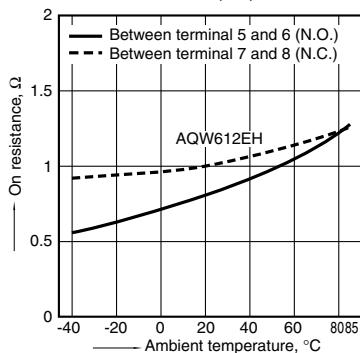


3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

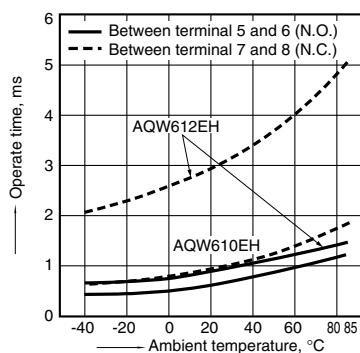


4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

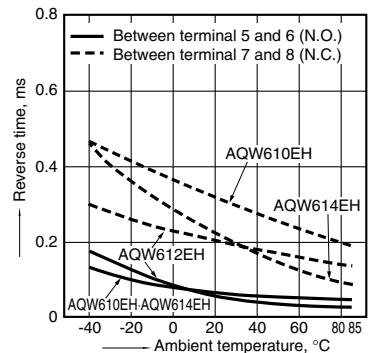


5. LED operate current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

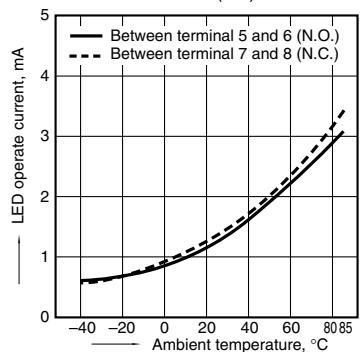


6. LED reverse current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

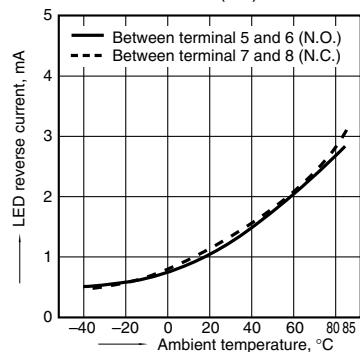


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

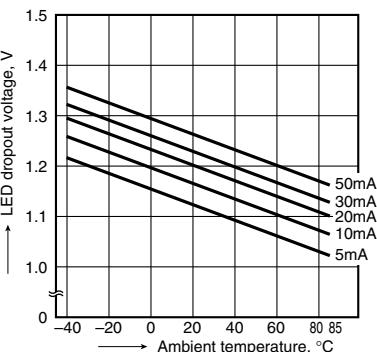


8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

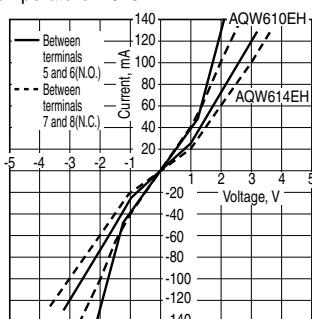


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

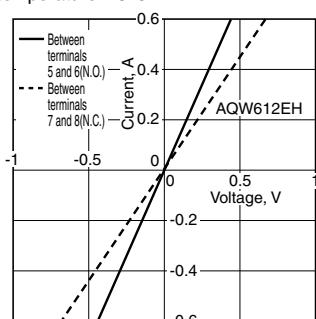

9-(1). Off state leakage current vs. load voltage characteristics


Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

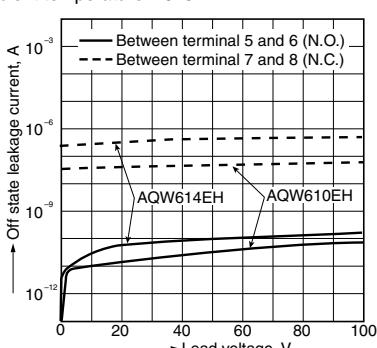

GE 1 Form A & 1 Form B (AQW61○EH)

9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

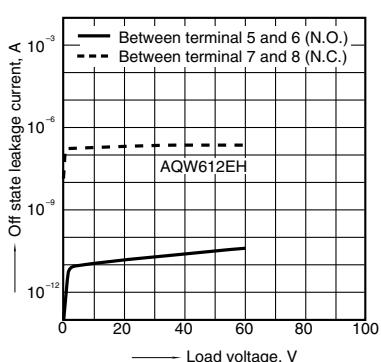


10-(1). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F


10-(2). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

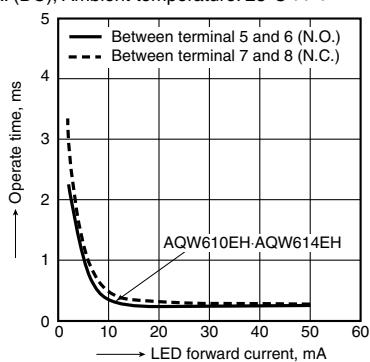

10-(2). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F


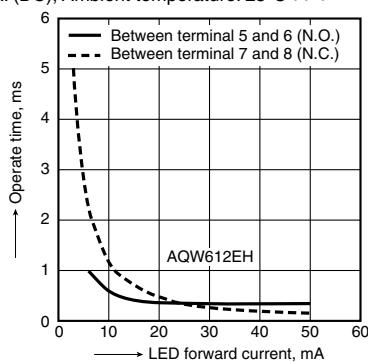


11-(1). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F


11-(2). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

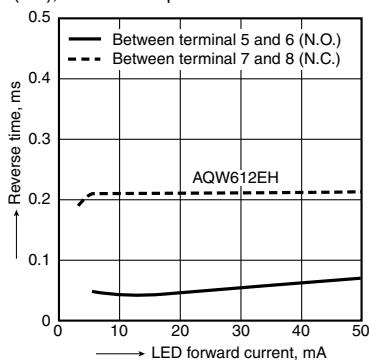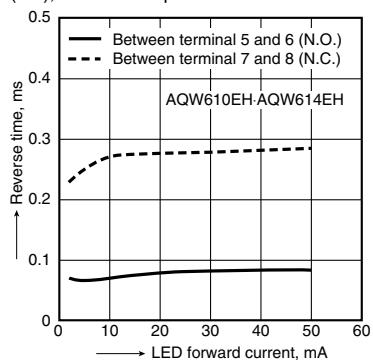


12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

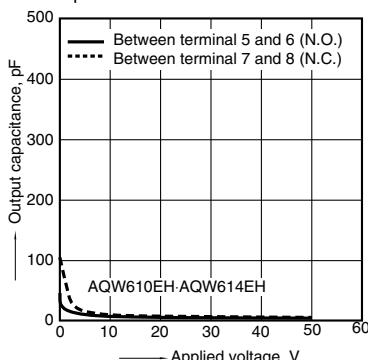

12-(2). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

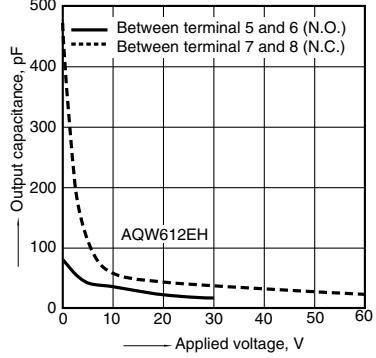

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQW610EHA](#) [AQW614EHA](#) [AQW612EH](#) [AQW614EH](#) [AQW610EH](#)