

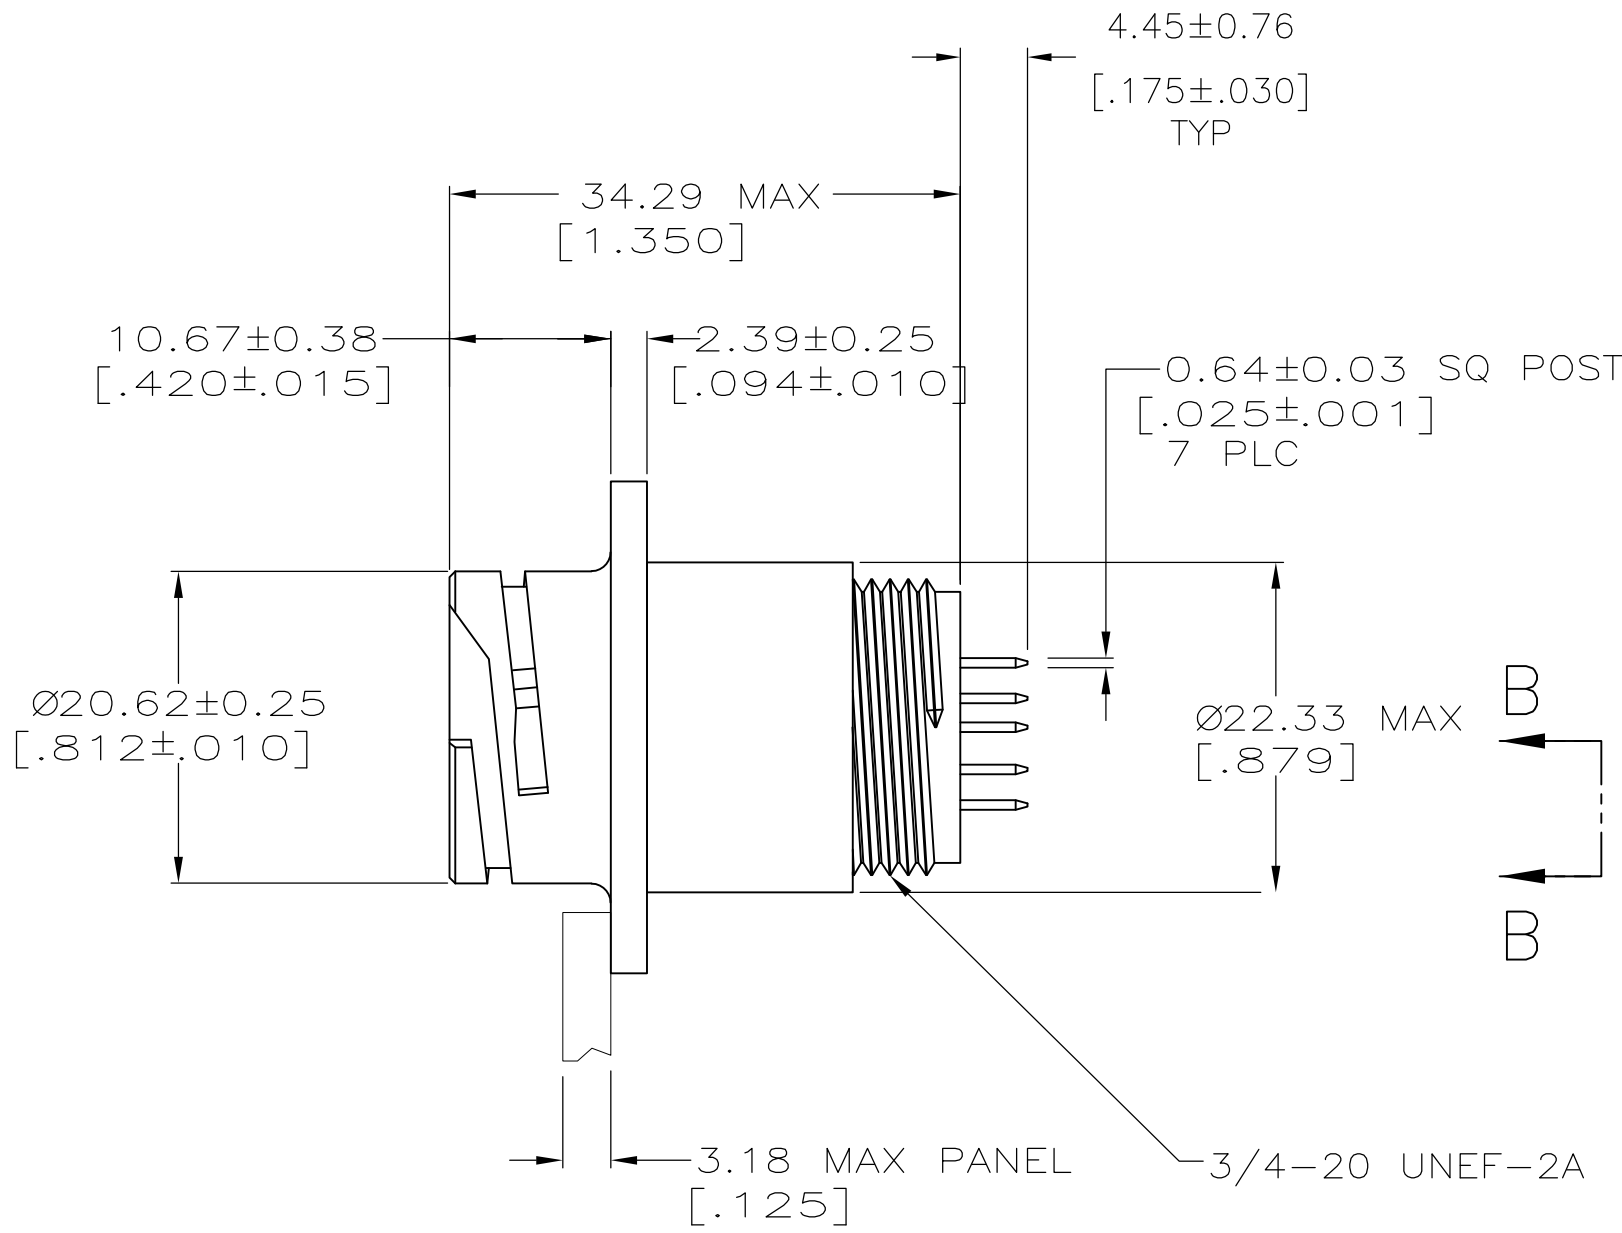



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		A	REVISED PER ECO-14-014457	24SEP2014	NK	MZ

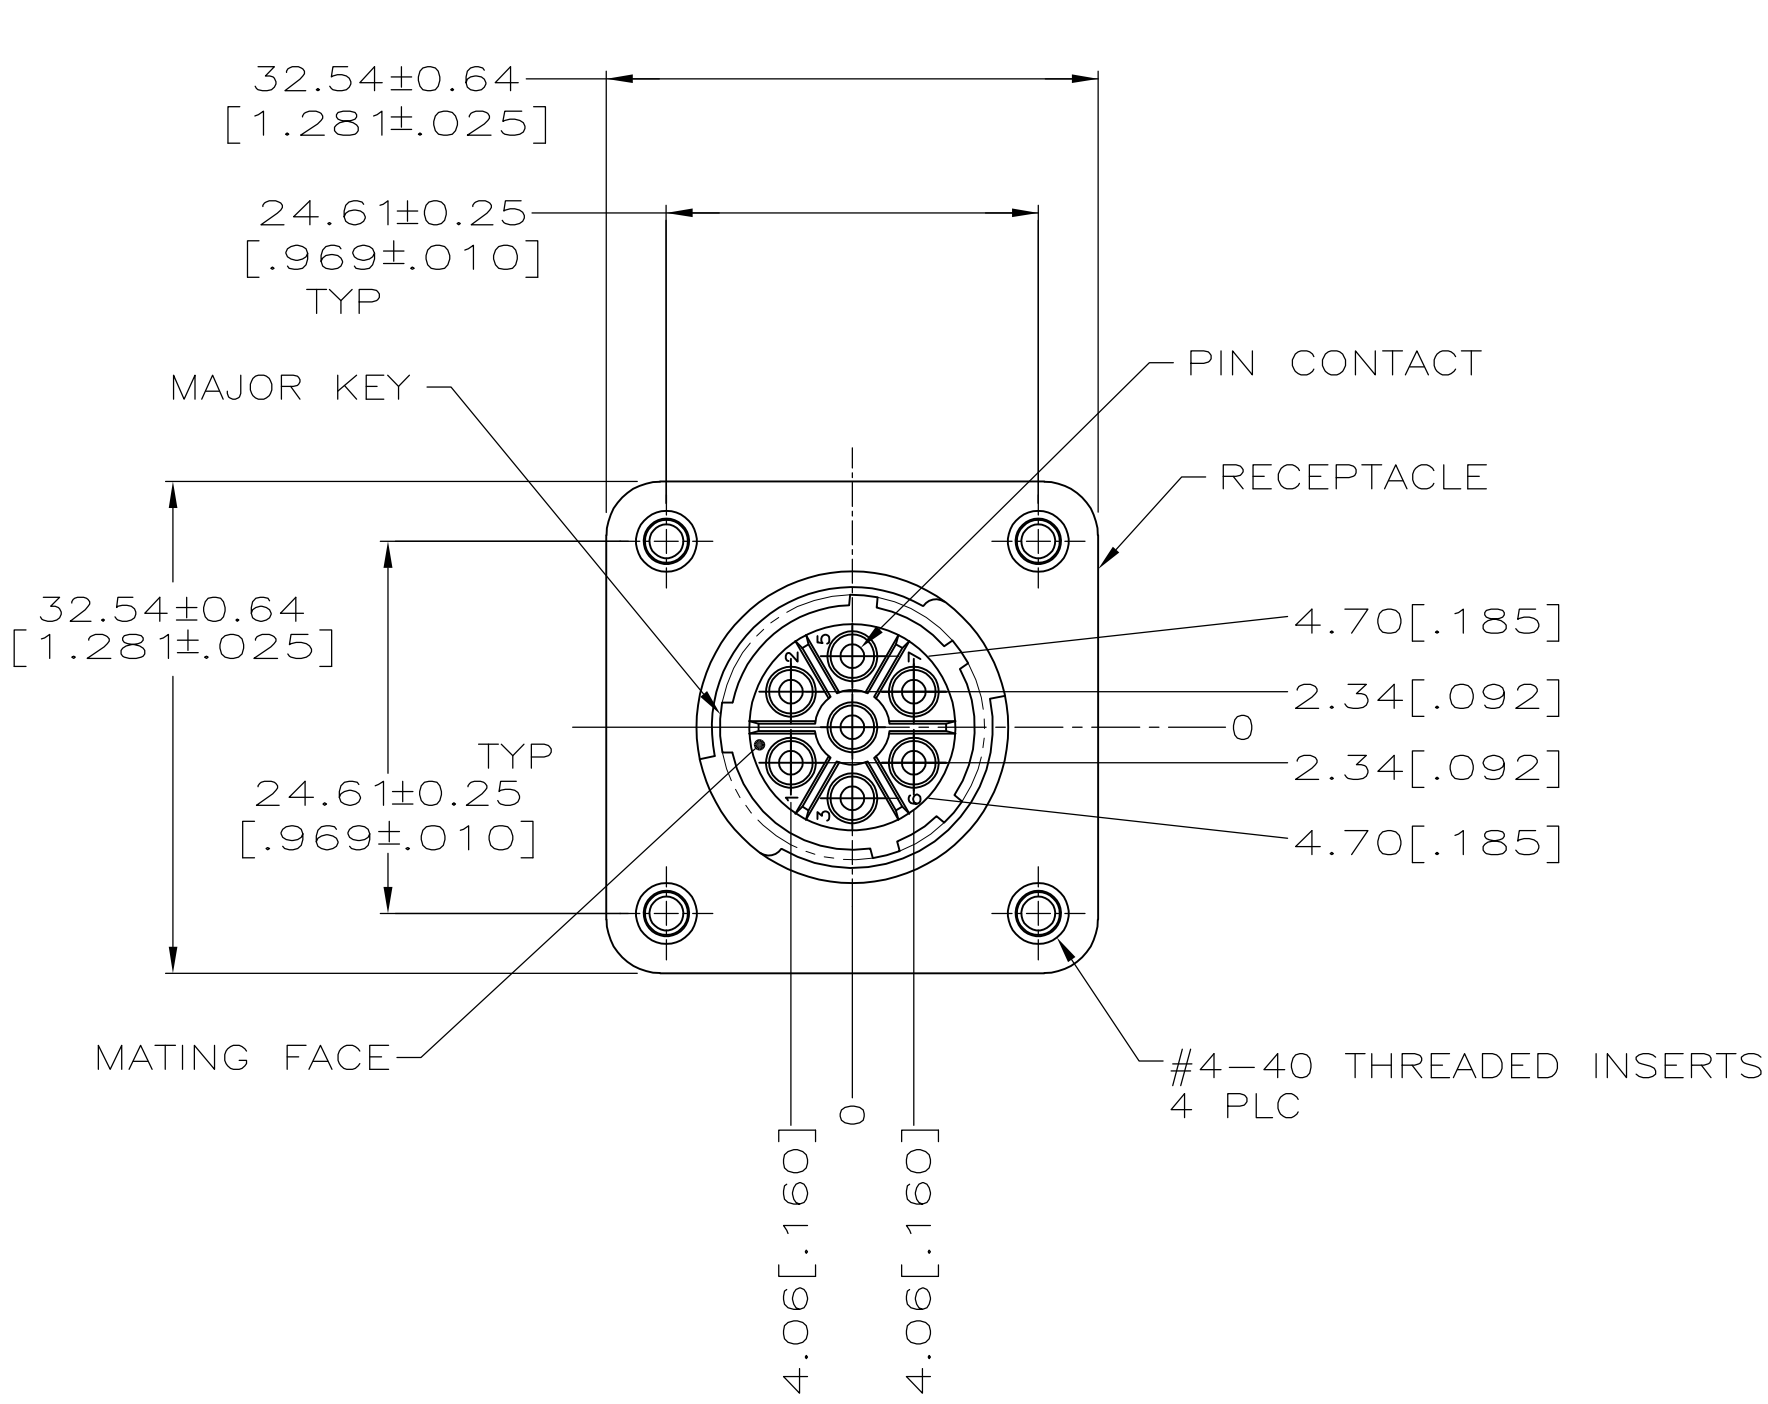


- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 MATERIALS:
HOUSING: NYLON, UL94 V-0, BLACK
CONTACT SPRING: STAINLESS STEEL
CONTACT BODY AND POST: BRASS
THREADED INSERTS: BRASS
- 3 FINISHES.
CONTACT BODY: .00076 [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END OF PIN GOLD FLASH ON REMAINDER OF CONTACT. BOTH OVER .00127 [000050] MIN NICKEL
CONTACT POST: .00254 [.000100] MIN TIN OVER .00127 [.000050] MIN NICKEL.

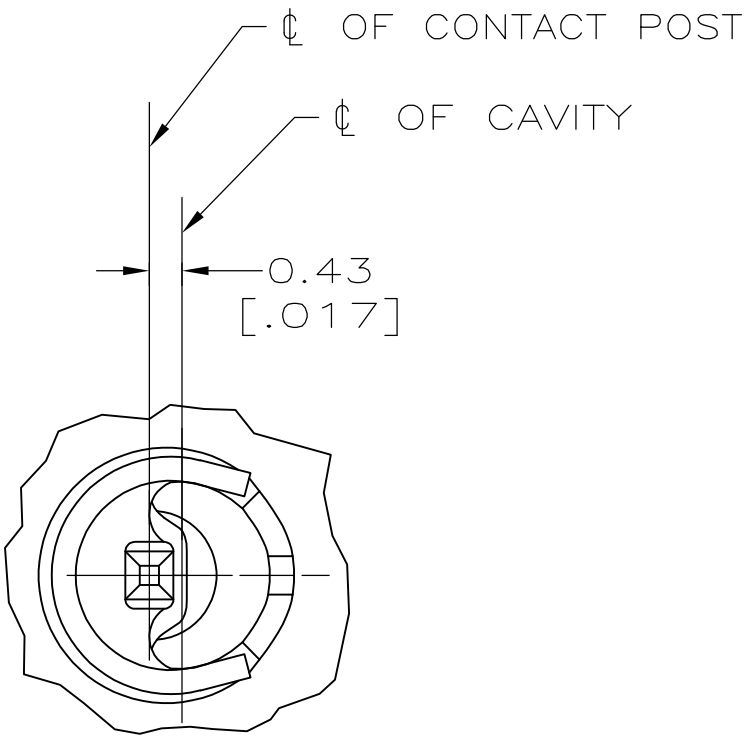

VIEW B-B
SCALE 10:1
5 PLC

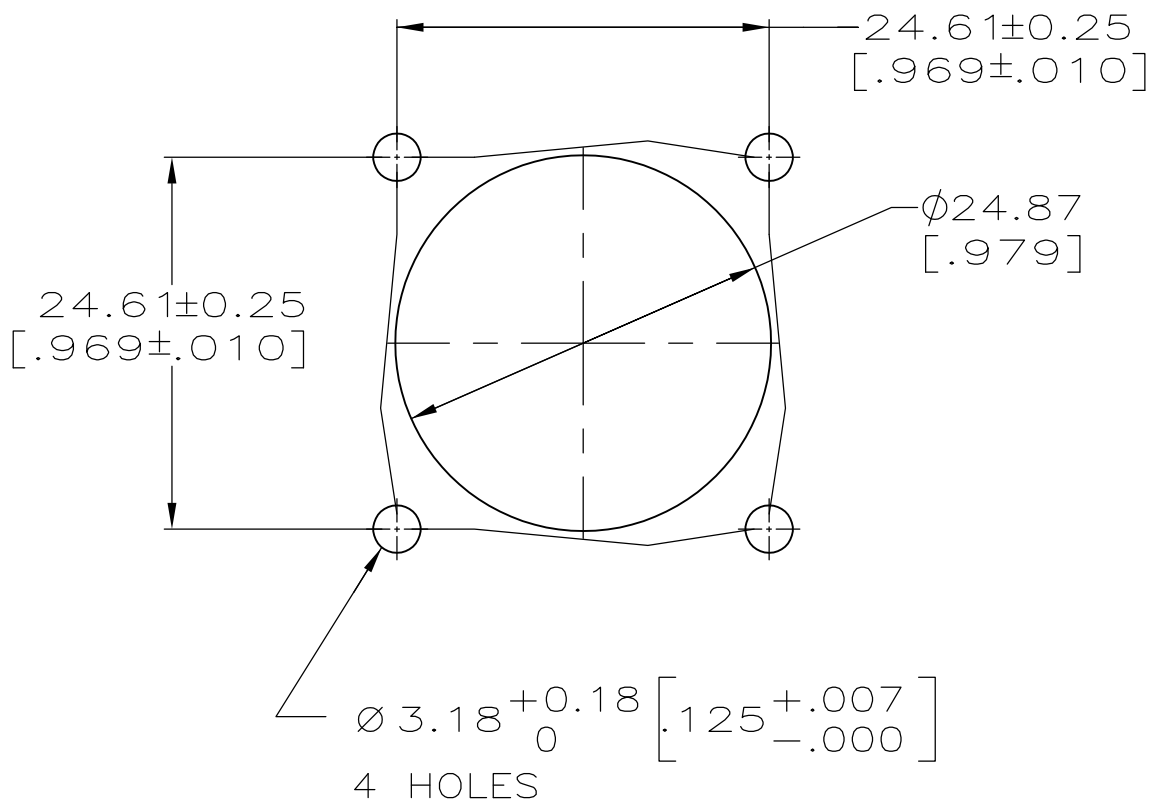

RECOMMENDED PANEL CUTOUT

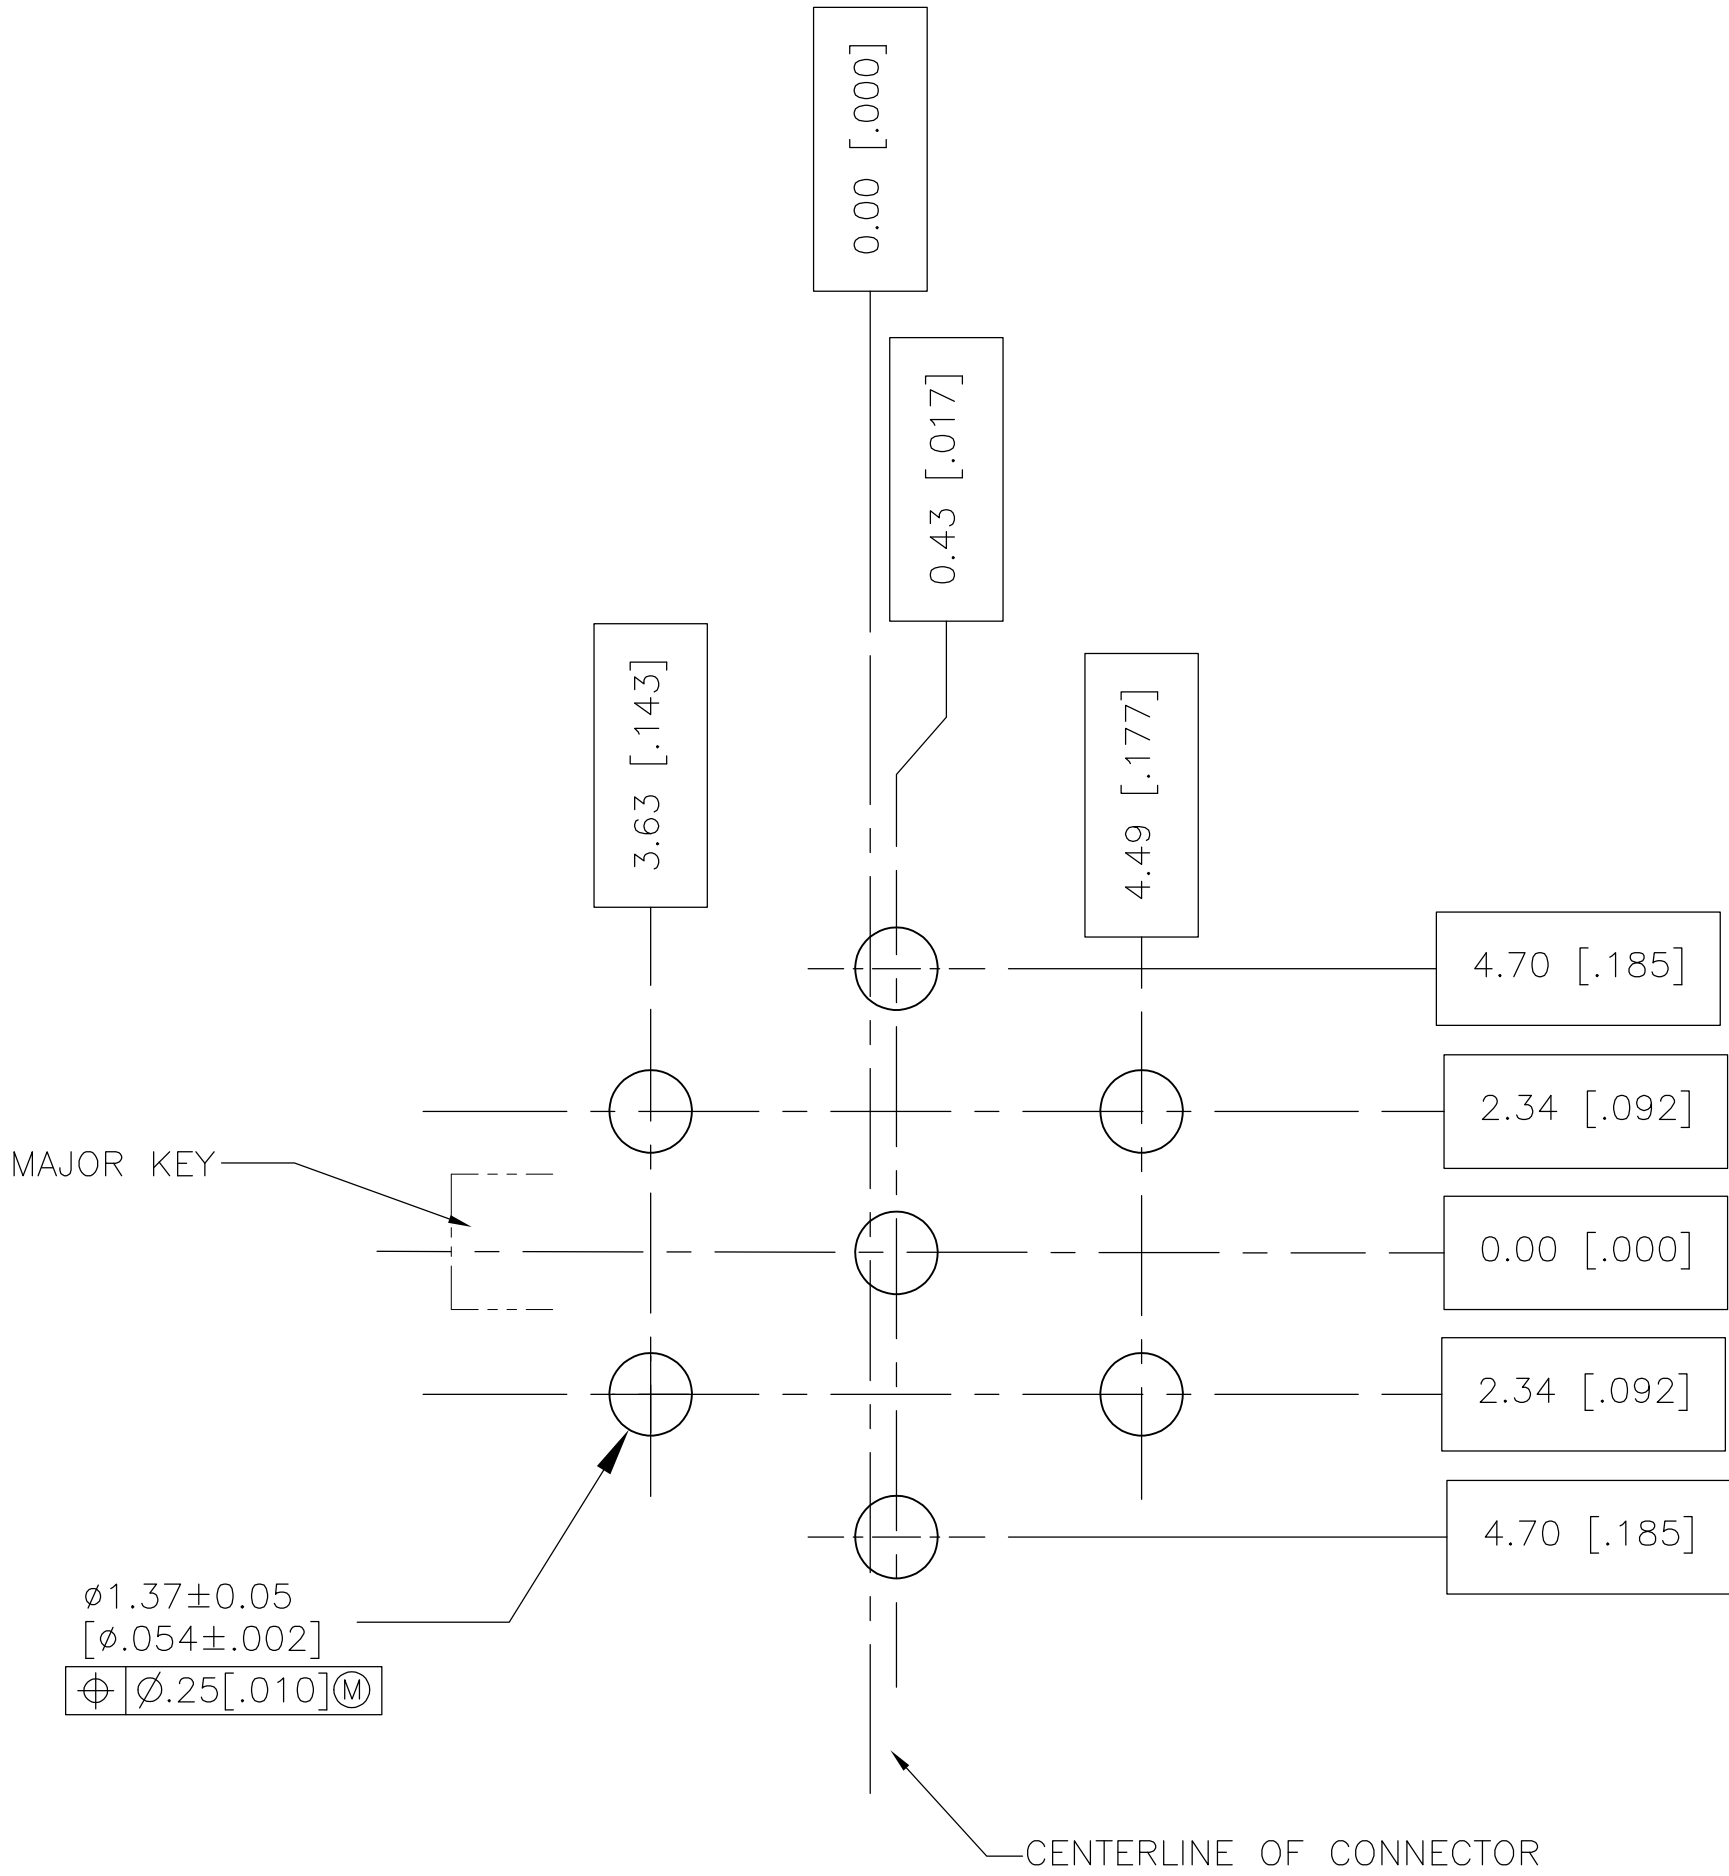

RECOMMENDED BOARD LAYOUT
SCALE: 4:1

2267121-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI, K 30MAY2014	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK ZITTO, MARK 30MAY2014	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD ZITTO, MARK 30MAY2014	PRODUCT SPEC	
0 PLC ± -		108-10024		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.13 [.005]		114-10038		
3 PLC ± -		WEIGHT		
4 PLC ± -		A1 00779		
ANGLES ± -		CUSTOMER DRAWING		
FINISH		SCALE 2:1 SHEET 1 OF 1 REV A		
2		2267121		