
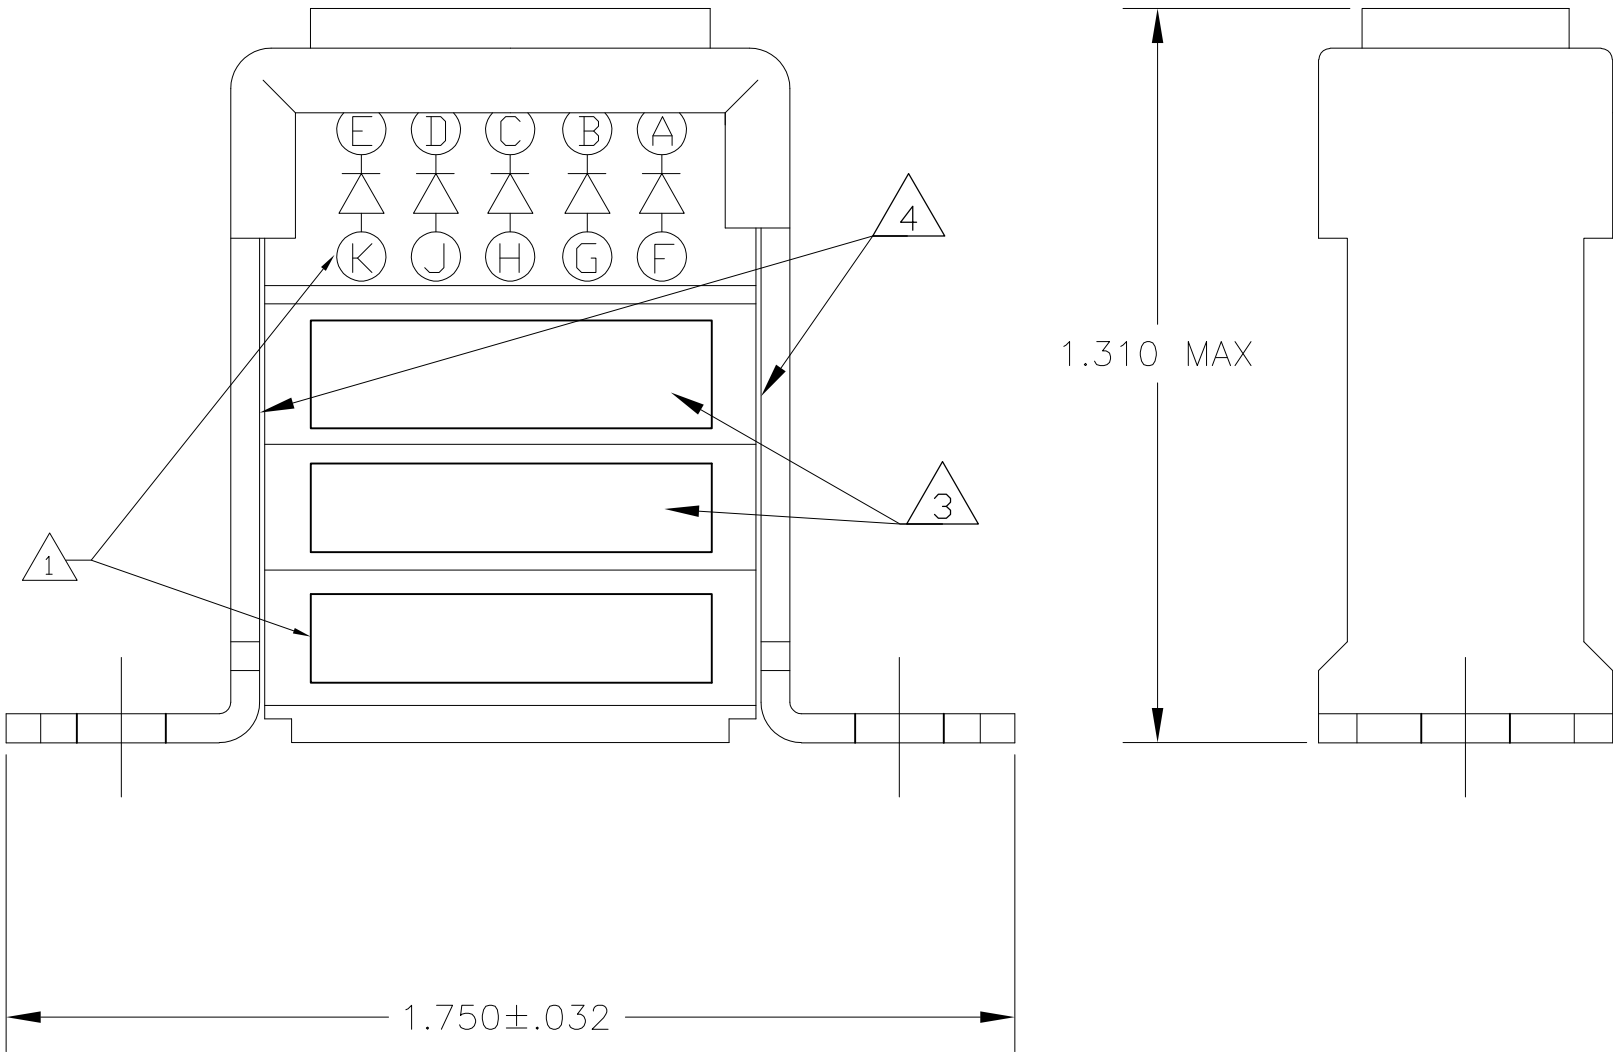



LOC	DIST	REVISIONS					
DF	X5	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REV PER ECO-11-022392	07NOV11	PY	DE

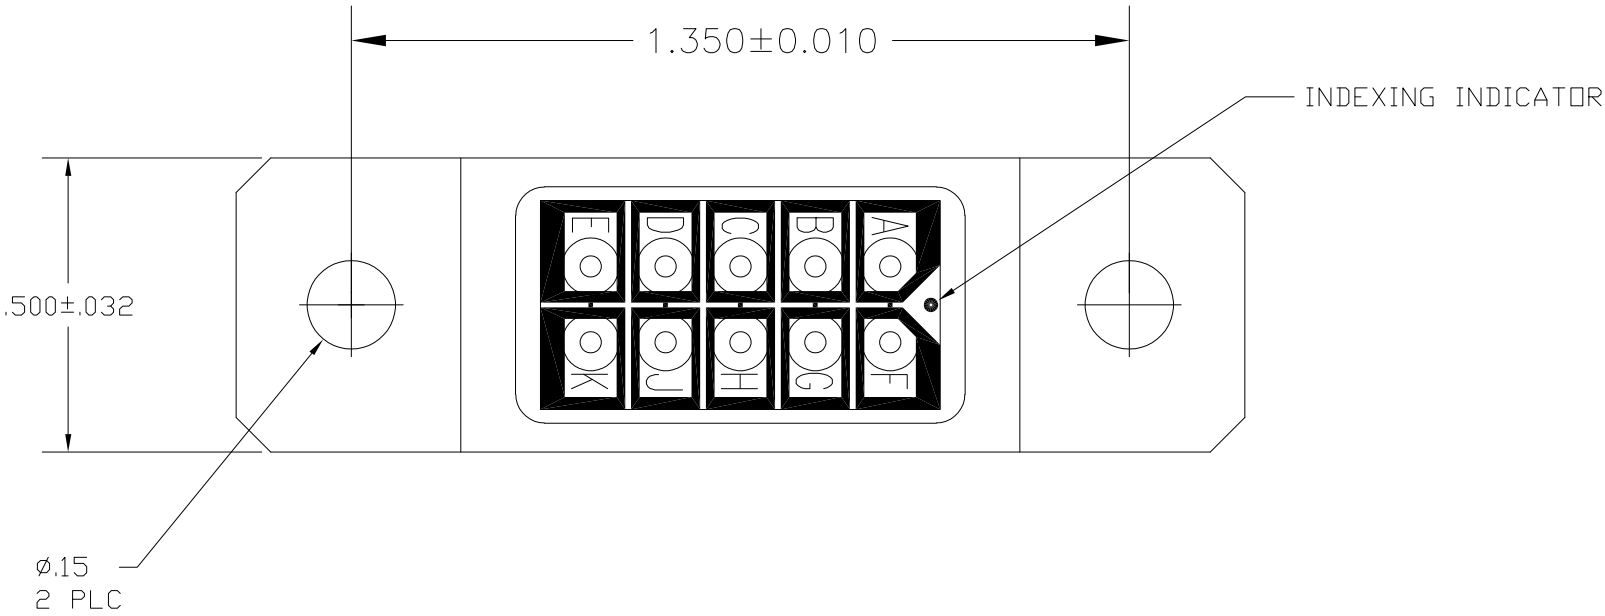

DESCRIPTION	MATERIAL	FINISH
GROMMET	FLUOROSILICONE RUBBER	COLOR: BLUE
MODULE ASSEMBLY	THERMOSET EPOXY	COLOR: BLACK
CONTACT, SOCKET ASSEMBLY	BERYLLIUM COPPER PER ASTM-B194	GOLD PLATE PER MIL-G-45204
CLIP CONTACT RETAINING	BERYLLIUM COPPER PER ASTM-B194 OR SST PER QQ-S-766	NONE
BRACKET	AL-ALLOY 6061-T4 (.050 THK)	NICKEL PLATE PER MIL-C-26074
CONTACTS	COPPER ALLOY PER MIL-C-32029/1	GOLD PLATE PER MIL-G-45204
SEALING PLUGS	F.E.P. PER MIL-P-19468	COLOR: RED

- 1
- ASSEMBLIES ARE IDENTIFIED WITH "AMP", AMP P/N, DATE CODE, AND DIODE SCHEMATIC ON MODULE AT AREA SHOWN.
- 2
- CONTACTS, INSERTION/EXTRACTION TOOL AND SEALING PLUGS SUPPLIED WITH MODULE ASSEMBLY.
- 3
- MARK ASSEMBLY WITH CUSTOMER PART NO. 12079-20E-012 AT AREA SHOWN.
- 4
- METAL MOUNTING BRACKET NOT BONDED TO MODULE ASSEMBLY.
- 5
- DIODE MAY BE A COMMERCIAL DIODE THAT HAS BEEN SCREENED TO MEET THE REQUIREMENTS OF JANTX1N5552.
- 6
- DIODE MAY BE A COMMERCIAL DIODE THAT HAS BEEN SCREENED TO MEET THE REQUIREMENTS OF JANTX1N5554.

JANTX1N5554	6	2	SIZE 20	591858-3
JANTX1N5552	5		SIZE 20	591858-2
JANTX1N5552	5	2 3	SIZE 20	591858-1
DIODE	REMARKS	DESCRIPTION	PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA 09JAN2006		 TE Connectivity			
DIMENSIONS: INCHES		CHK R. RYAN 08-10-93					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD R. RYAN 08-10-93		NAME MODULE, FEED-BACK SIZE 20 ASSEMBLY TJ -		
			PRODUCT SPEC -				
			APPLICATION SPEC -				
			WEIGHT -				
MATERIAL SEE TABLE		FINISH -		SIZE A2	CAGE CODE 00779	DRAWING NO C=591858	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 1	REV E	