
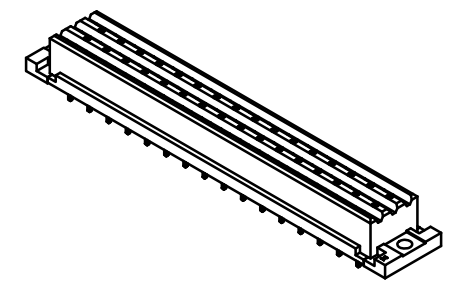


Elastische Einpresszone / *compliant pressfit zone*
 Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*
 Bauart 7 / *type 7*
 Lochaufbau siehe ERNI-Spezifikation 164062 / *hole design see ERNI-specification 164062*

- 1) $1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
- $1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Leiterplatten-Layout Vorschlag
PCB-Layout Proposal

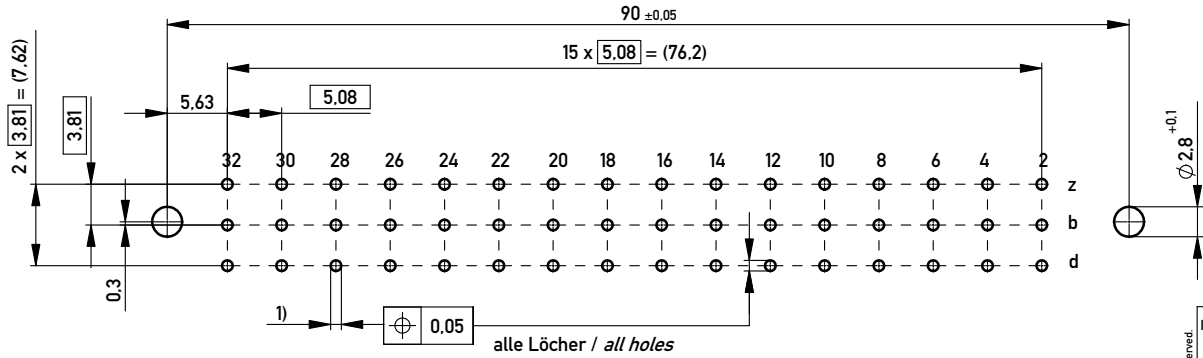

Fehlende Masse und Angaben nach DIN EN 60603-2 / *Missing information and dimensions according to DIN EN 60603-2*
 Sonstige Angaben siehe Fertigungsunterlagen / *Additional indications please see the production documentation*

Information: All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances All Dimensions in mm	Scale 2:1		
		Designation Federleiste F48 flach EE <i>Fem.Con. F48 flat Pressfit</i>		
www.ERNI.com		354746		I A3
a Index	08.08.2013 Date	Class STVF		

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354746](#)