



RXJ Series

Features

- 105°C, 2,000 ~ 5,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS Compliance




Sleeve & Marking Color: Brown & White

Specifications

Items	Performance																																												
Category Temperature Range	6.3 ~ 63V					100V																																							
	-55℃ ~ +105℃					-40℃ ~ +105℃																																							
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																												
Leakage Current (at 20℃)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																																												
Tanδ (at 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>Tanδ (max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td></tr></table>										Rated Voltage	6.3	10	16	25	35	50	63	100	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																	
	Rated Voltage	6.3	10	16	25	35	50	63	100																																				
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																					
When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.																																													
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																																												
	Rated Voltage		6.3	10	16	25	35	50	63	100																																			
Impedance Ratio		Z(-55℃)/Z(+20℃)	4	4	3	3	3	3	3	3																																			
Endurance	Test Time		2,000 Hrs for ϕ D ≤ 8 mm; 5,000 Hrs for ϕ D ≥ 10 mm																																										
	Capacitance Change		Within ±20% of initial value																																										
	Tanδ		Less than 200% of specified value																																										
	Leakage Current		Within specified value																																										
	* The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied with rated ripple current for 2,000/5,000 hours at 105℃.																																												
Shelf Life Test	Test Time		1,000 Hrs																																										
	Capacitance Change		Within ±20% of initial value																																										
	Tanδ		Less than 200% of specified value																																										
	Leakage Current		Within specified value																																										
	* The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.																																												
Ripple Current and Frequency Multipliers	<table><tr><th>Cap.(μF) \ Freq.(Hz)</th><th>60 (50)</th><th>120</th><th>500</th><th>1k</th><th>10k</th><th>100k</th></tr><tr><td>Under 33</td><td>0.40</td><td>0.55</td><td>0.65</td><td>0.80</td><td>0.90</td><td>1.00</td></tr><tr><td>39 ~ 330</td><td>0.60</td><td>0.70</td><td>0.80</td><td>0.90</td><td>0.95</td><td>1.00</td></tr><tr><td>390 ~ 1,000</td><td>0.65</td><td>0.80</td><td>0.85</td><td>0.98</td><td>1.00</td><td>1.00</td></tr><tr><td>1,200 up above</td><td>0.80</td><td>0.90</td><td>0.95</td><td>0.98</td><td>1.00</td><td>1.00</td></tr></table>										Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k	100k	Under 33	0.40	0.55	0.65	0.80	0.90	1.00	39 ~ 330	0.60	0.70	0.80	0.90	0.95	1.00	390 ~ 1,000	0.65	0.80	0.85	0.98	1.00	1.00	1,200 up above	0.80	0.90	0.95	0.98	1.00	1.00
	Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k	100k																																						
	Under 33	0.40	0.55	0.65	0.80	0.90	1.00																																						
	39 ~ 330	0.60	0.70	0.80	0.90	0.95	1.00																																						
	390 ~ 1,000	0.65	0.80	0.85	0.98	1.00	1.00																																						
	1,200 up above	0.80	0.90	0.95	0.98	1.00	1.00																																						

Diagram of Dimensions

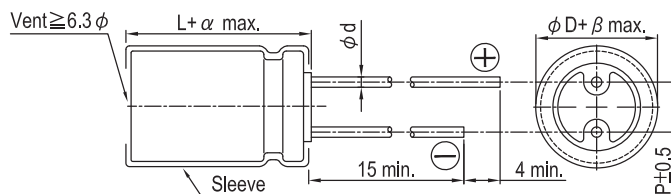

Lead Spacing and Diameter Unit: mm

ϕD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5		0.6			0.8	
α	L<20: 1.5, L $\geq$ 20: 2.0						
β	0.5						



Dimension: $\phi D \times L(mm)$

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension and Permissible Ripple Current

Cap. (μF)	Contents	6.3V (0J)					10V (1A)					16V (1C)				
		$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)	
			20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz
33												5×11	1.30	3.90	108	154
39												5×11	1.30	3.90	108	154
47							5×11	2.10	5.50	78	111	6.3×11	0.60	1.80	182	260
56							5×11	1.90	4.80	85	121	6.3×11	0.60	1.80	182	260
68							5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260
100		5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260
220		6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	280	400	8×11.5	0.33	0.99	320	400
330		8×11.5	0.33	0.88	280	400	8×11.5	0.33	0.99	280	400	10×12.5	0.25	0.75	360	510
390		8×11.5	0.33	0.88	320	400	10×12.5	0.27	0.75	410	510	10×16	0.19	0.57	510	635
470		10×12.5	0.25	0.75	410	510	10×12.5	0.25	0.75	410	510	10×16	0.19	0.57	510	635
560		10×12.5	0.25	0.75	410	510	10×16	0.19	0.57	510	635	10×20	0.14	0.42	775	860
680		10×16	0.19	0.57	510	635	10×16	0.19	0.57	510	635	10×20	0.14	0.42	775	860
1,000		10×20	0.14	0.42	690	860	10×20	0.14	0.37	690	860	12.5×20	0.085	0.26	1,000	1,250
1,200		10×20	0.14	0.42	775	860	10×25	0.12	0.30	930	1,030	12.5×20	0.085	0.26	1,125	1,250
2,200		12.5×20	0.085	0.26	1,125	1,250	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355
3,300		12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355	16×31.5	0.048	0.14	1,830	2,030
4,700		16×25	0.060	0.18	1,595	1,770	16×31.5	0.048	0.14	1,830	2,030	16×35.5	0.044	0.13	2,065	2,295

Cap. (μF)	Contents	25V (1E)					35V (1V)					50V (1H)				
		$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)	
			20°C	-10°C	120Hz	100KHz		20°C	-10°C	120Hz	100KHz		20°C	-10°C	120Hz	100KHz
2.2												5×11	4.0	12.0	48	88
3.3												5×11	3.50	11.0	52	94
4.7												5×11	3.00	9.00	55	100
6.8												5×11	3.00	9.00	55	100
10												5×11	2.00	6.00	68	124
22							5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	143	260
33		5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	143	260
39		6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260
47		6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
56		6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
68		6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
100		8×11.5	0.33	0.99	320	400	8×11.5	0.33	0.99	320	400	10×16	0.19	0.57	445	635
220		10×12.5	0.25	0.75	360	510	10×16	0.19	0.57	445	635	10×25	0.12	0.30	825	1,030
330		10×16	0.19	0.57	445	635	10×20	0.12	0.42	600	860	12.5×20	0.085	0.26	875	1,250
390		10×20	0.14	0.42	775	965	10×25	0.12	0.30	930	1,030	12.5×25	0.070	0.21	1,085	1,355
470		10×20	0.14	0.42	775	965	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355
560		10×25	0.12	0.30	930	1,030	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355
680		12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355	16×25	0.060	0.18	1,415	1,770
1,000		12.5×25	0.070	0.23	1,080	1,355	12.5×25	0.070	0.21	1,085	1,355	16×25	0.060	0.18	1,595	1,770
1,200		12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355	16×31.5	0.048	0.14	1,830	2,030
2,200		16×25	0.060	0.18	1,595	1,770	16×35.5	0.044	0.13	2,065	2,295	18×40	0.037	0.10	2,465	2,740
3,300		16×35.5	0.044	0.13	2,065	2,295	18×40	0.037	0.10	2,465	2,740					
4,700		18×40	0.037	0.10	2,465	2,740										



Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension and Permissible Ripple Current

Cap. (μF)	Contents	Rated Volt. V _{DC}	63V (1J)				100V (2A)			
			$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω , max./100k Hz)		Ripple Current (mA/rms, 105°C)
				20°C	-10°C			20°C	-10°C	
2.2							5×11	6.00	21.0	40
3.3							5×11	5.00	18.0	43
4.7							6.3×11	1.20	4.20	100
6.8							6.3×11	1.20	4.20	100
10			6.3×11	1.20	4.20	100	8×11.5	0.56	2.00	168
22			6.3×11	1.20	4.20	100	8×11.5	0.56	2.00	168
33			8×11.5	0.56	2.00	170	10×12.5	0.50	1.80	210
39			8×11.5	0.56	2.00	170	10×16	0.32	1.10	350
47			8×11.5	0.56	2.00	170	10×20	0.27	0.95	435
56			10×12.5	0.50	1.80	265	10×20	0.27	0.95	435
68			10×12.5	0.50	1.80	265	10×25	0.21	0.63	530
100			10×20	0.27	0.95	435	12.5×20	0.16	0.56	625
220			12.5×20	0.094	0.24	570	16×25	0.090	0.32	1,010
330			12.5×25	0.073	0.21	770	16×31.5	0.060	0.17	1,255
390			12.5×25	0.073	0.21	770	16×35.5	0.056	0.14	1,650
470			16×25	0.060	0.18	1,420				
560			16×31.5	0.048	0.14	1,625				
680			16×31.5	0.048	0.14	1,625				
1,000			18×35.5	0.041	0.11	1,790				

Part Numbering System

RXJ Series	470μF	±20%	6.3V	Bulk Package	Gas Type	10 ϕ × 12.5L	Pb-free and PET sleeve
RXJ	471	M	0J	BK	-	1012	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.