


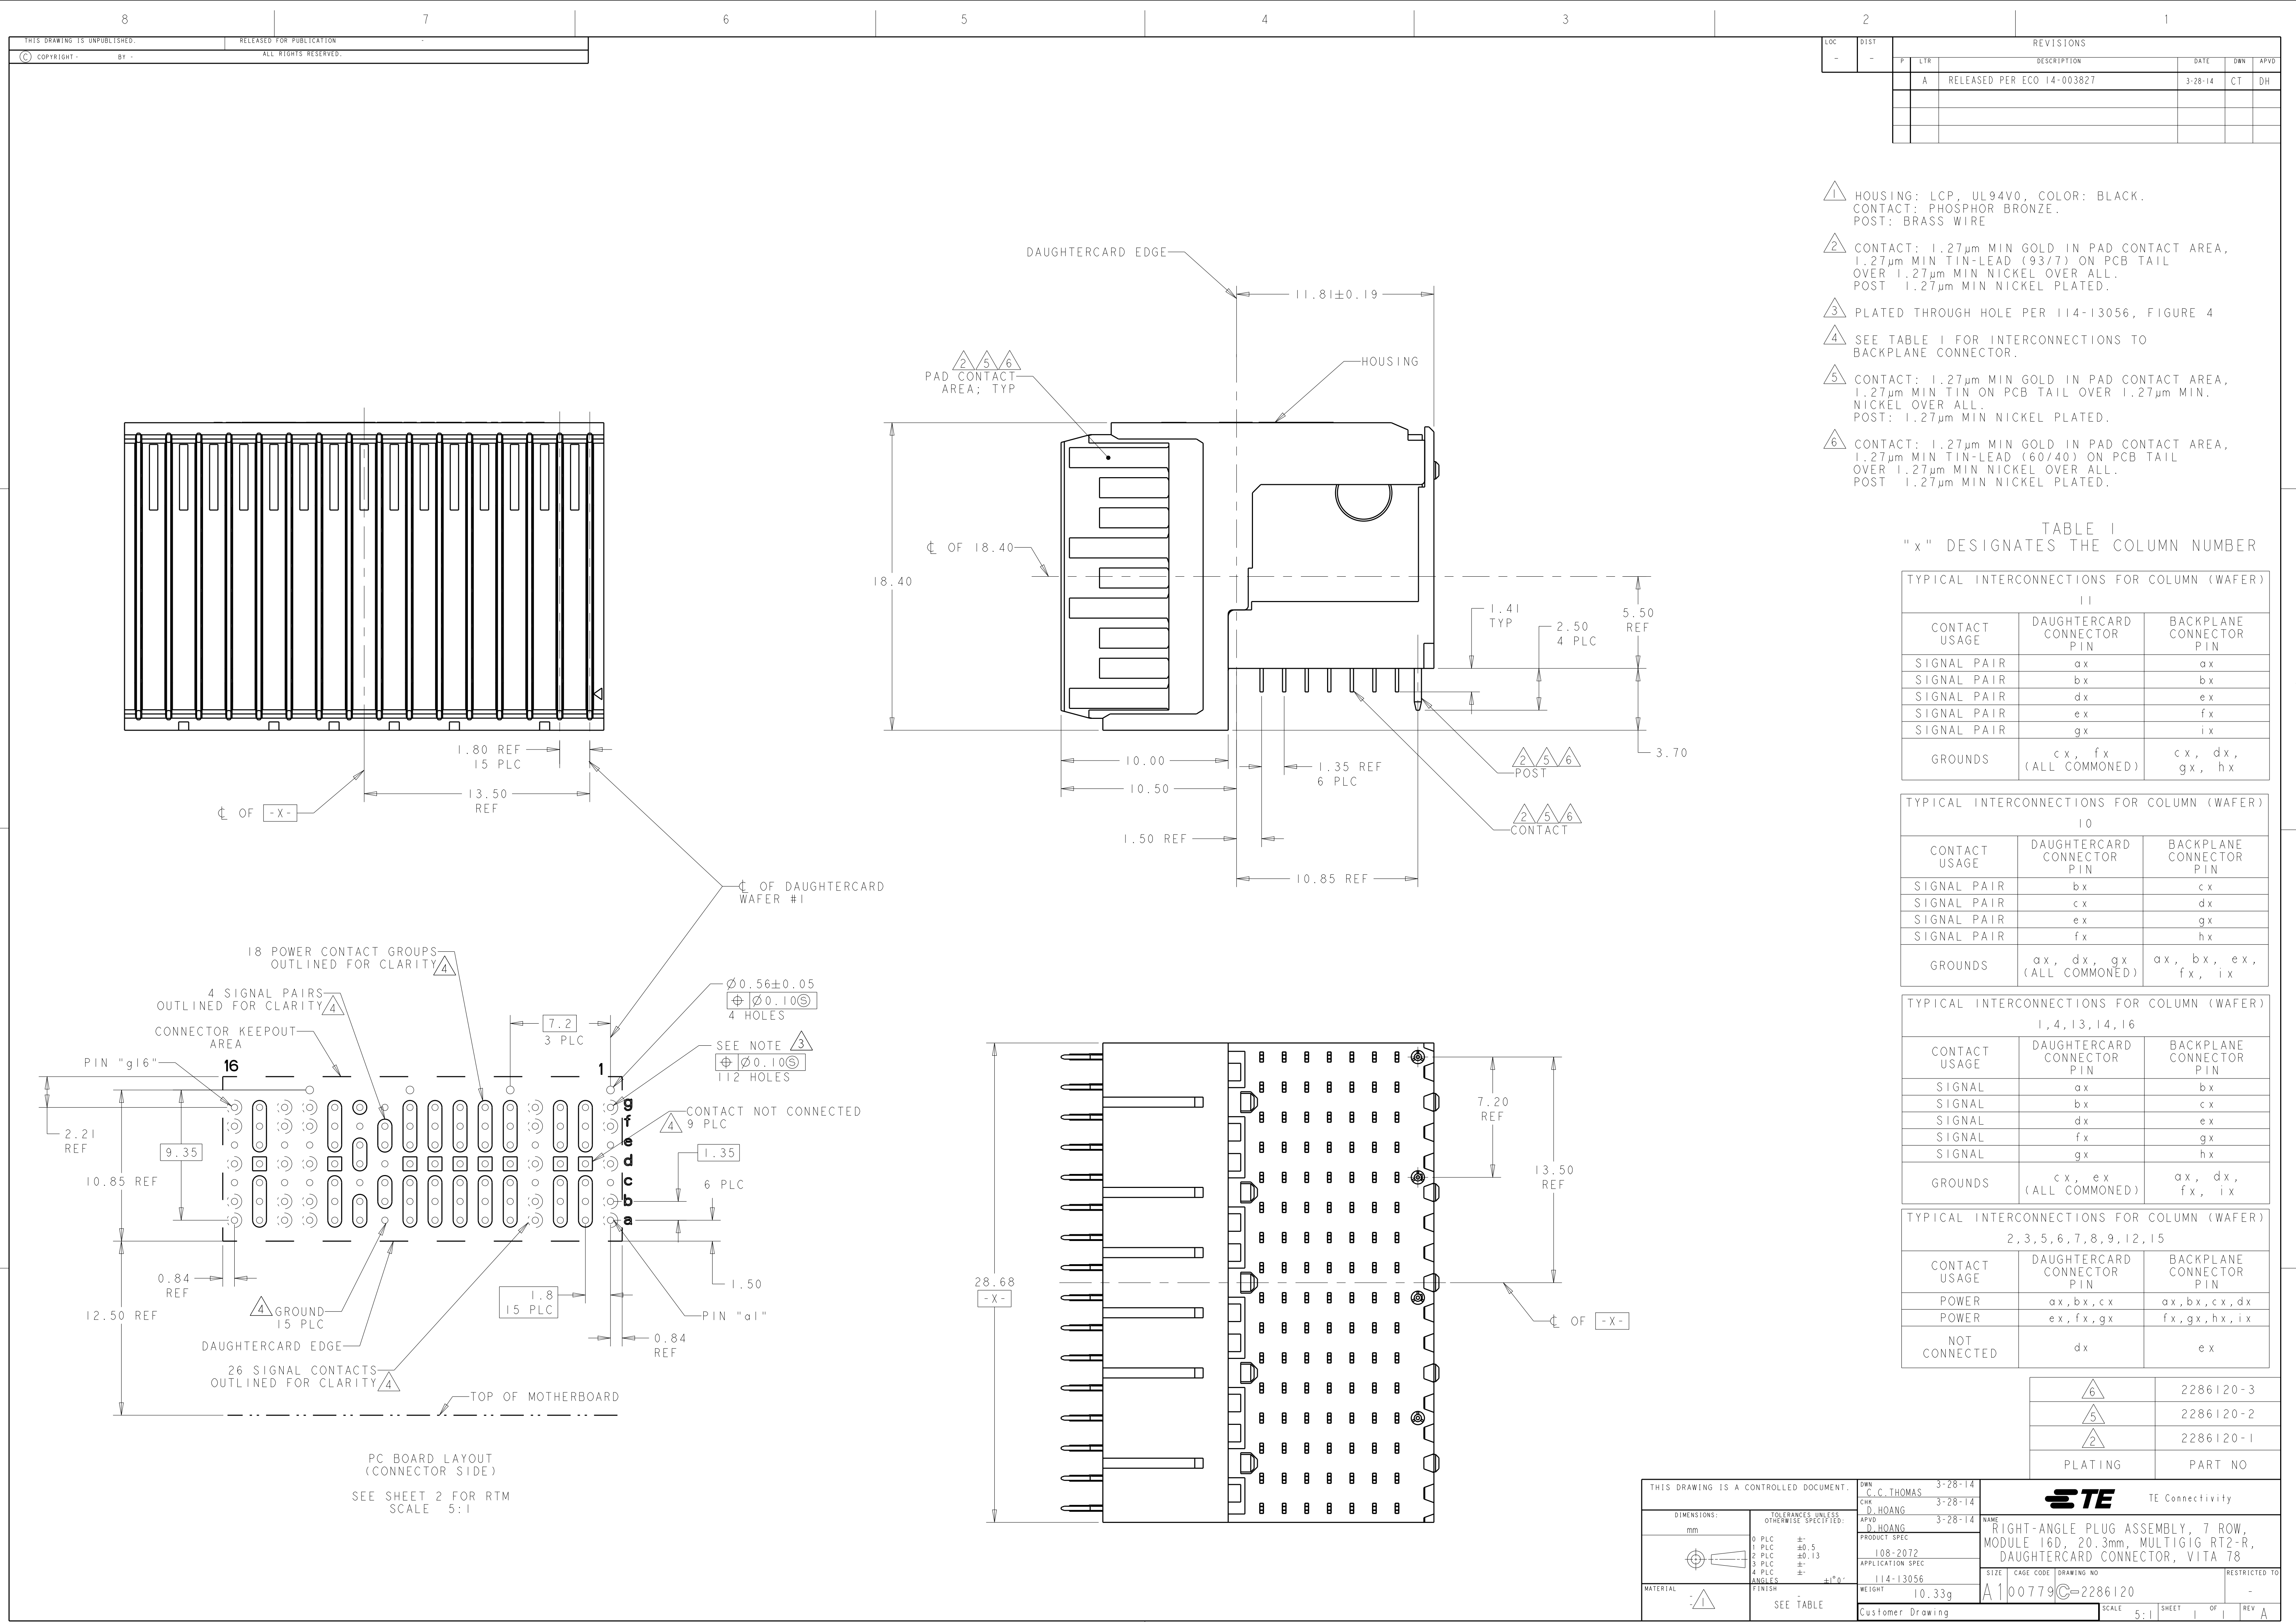

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A	RELEASED PER ECO 14-003827	3-28-14	CT	DH

- 1 HOUSING: LCP, UL94V0, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE
- 2 CONTACT: 1.27µm MIN GOLD IN PAD CONTACT AREA,
1.27µm MIN TIN-LEAD (93/7) ON PCB TAIL
OVER 1.27µm MIN NICKEL OVER ALL.
POST 1.27µm MIN NICKEL PLATED.
- 3 PLATED THROUGH HOLE PER 114-13056, FIGURE 4
- 4 SEE TABLE 1 FOR INTERCONNECTIONS TO
BACKPLANE CONNECTOR.
- 5 CONTACT: 1.27µm MIN GOLD IN PAD CONTACT AREA,
1.27µm MIN TIN ON PCB TAIL OVER 1.27µm MIN.
NICKEL OVER ALL.
POST: 1.27µm MIN NICKEL PLATED.
- 6 CONTACT: 1.27µm MIN GOLD IN PAD CONTACT AREA,
1.27µm MIN TIN-LEAD (60/40) ON PCB TAIL
OVER 1.27µm MIN NICKEL OVER ALL.
POST 1.27µm MIN NICKEL PLATED.

TABLE 1
"x" DESIGNATES THE COLUMN NUMBER

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER)		
11		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	ax	ax
SIGNAL PAIR	bx	bx
SIGNAL PAIR	dx	ex
SIGNAL PAIR	ex	fx
SIGNAL PAIR	gx	ix
GROUND	cx, fx (ALL COMMONED)	cx, dx, gx, hx

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER)		
10		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	bx	cx
SIGNAL PAIR	cx	dx
SIGNAL PAIR	ex	gx
SIGNAL PAIR	fx	hx
GROUND	ax, dx, gx (ALL COMMONED)	ax, bx, ex, fx, ix

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER)		
1, 4, 13, 14, 16		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL	ax	bx
SIGNAL	bx	cx
SIGNAL	dx	ex
SIGNAL	fx	gx
SIGNAL	gx	hx
GROUND	cx, ex (ALL COMMONED)	ax, dx, fx, ix

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER)		
2, 3, 5, 6, 7, 8, 9, 12, 15		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
POWER	ax, bx, cx	ax, bx, cx, dx
POWER	ex, fx, gx	fx, gx, hx, ix
NOT CONNECTED	dx	ex

6	2286120-3
5	2286120-2
2	2286120-1
PLATING	
PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 3-28-14	TE Connectivity	
DIMENSIONS:		CHK D. HOANG 3-28-14		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. HOANG 3-28-14	NAME	
	0 PLC ±	PRODUCT SPEC	RIGHT-ANGLE PLUG ASSEMBLY, 7 ROW, MODULE 16B, 20.3mm, MULTIGIG RT2-R, DAUGHTERCARD CONNECTOR, VITA 78	
	1 PLC ±0.5	108-2072		
	2 PLC ±0.13	APPLICATION SPEC	SIZE	
	3 PLC ±	114-13056	CAGE CODE DRAWING NO	
	4 PLC ±	114-13056	RESTRICTED TO	
	ANGLES ±1°	WEIGHT 10.33g	A100779C=2286120	
MATERIAL	FINISH	Customer Drawing	SCALE 5:1 SHEET 1 OF 1 REV A	
	SEE TABLE			