

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850520103](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Receptacle, Style R Reverse, 64 Circuits

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General


Product Family Backplane Connectors
Series [85052](#)
Application Backplane
Component Type PCB Receptacle
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style R

Physical

Circuits (Loaded) 64
Circuits (maximum) 96
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Number of Columns 32
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Right Angle
PC Tail Length (in) 0.110 In
PC Tail Length (mm) 2.80 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In, 0.126 In
PCB Thickness Recommended (mm) 1.60 mm, 3.20 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Polarized to PCB Yes
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 2.5A
Data Rate 622.0 Mbps
Real Signals (per 25mm) 30
Voltage - Maximum 250V AC (RMS)

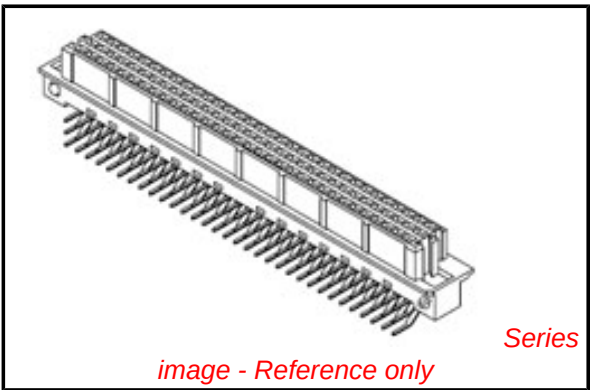

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[85052Series](#)

Mates With
DIN 41612 Headers [85003](#) , [85013](#)

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Sales Drawing	SDA-85052-0001, SDA-85052-0103
---------------	--------------------------------

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

