


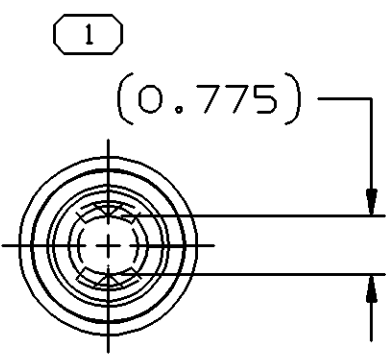
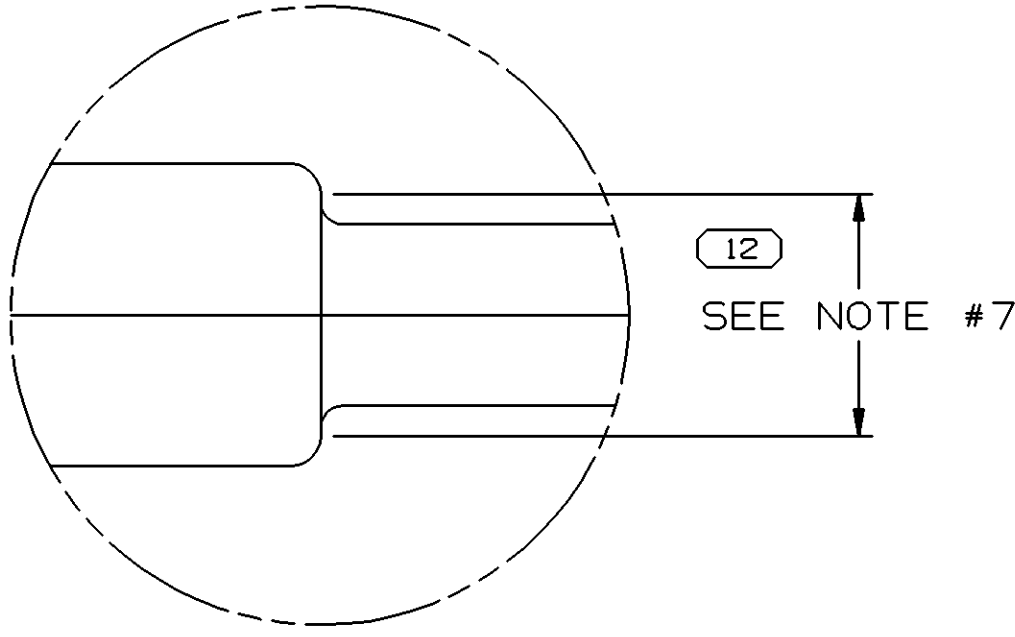
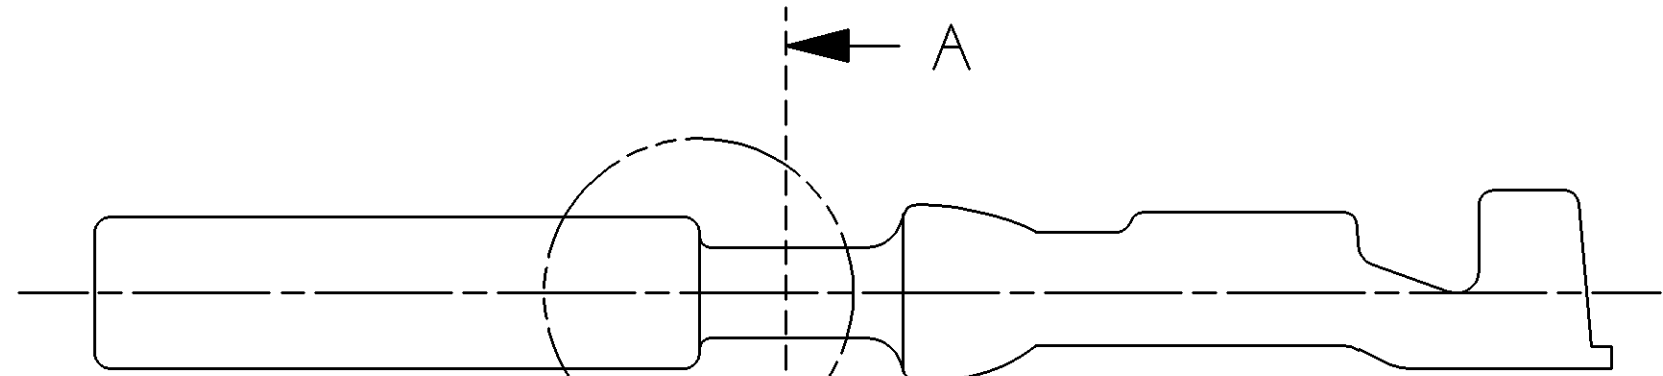




SYMBOL DEFINITION			MISSING NUMBERS			DWG STATUS			ZONE	REVISION HISTORY			AUTH	DR	APV	APV	1	2
			DATE	STG	REV	N/P	CHG											
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL  DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON AN INDIVIDUAL COMPONENT DRAWING	TOTAL NO. OF SYMBOLS ON DRAWING	9	10JUL02	R	01	-	-	-	15305314 & 15326244 - REVISED MATERIAL SPEC; 15435885 & 15435886 - RELEASED	224816	HH	EDV	60					
			26OCT02	R	02	-	-	-	UPDATED PDM ATTRIBUTES	232628	AFM	EDV	60					
			23AP03	R	03	-	-	-	15305314 - REVISED MAT'L SPEC	239485	RH	RH	60					
		LAST NO. USED	12	13MY03	R	04	-	-	-	UPDATED PDM ATTRIBUTES	240850	HH	JGR	60				

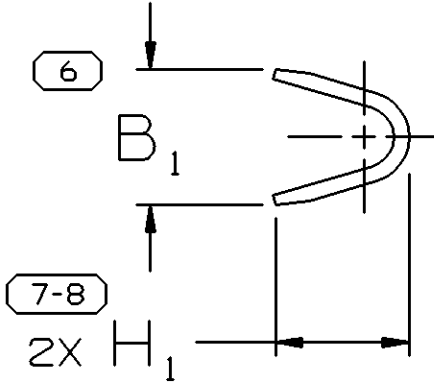

DETAIL "Y"
SCALE 20:1

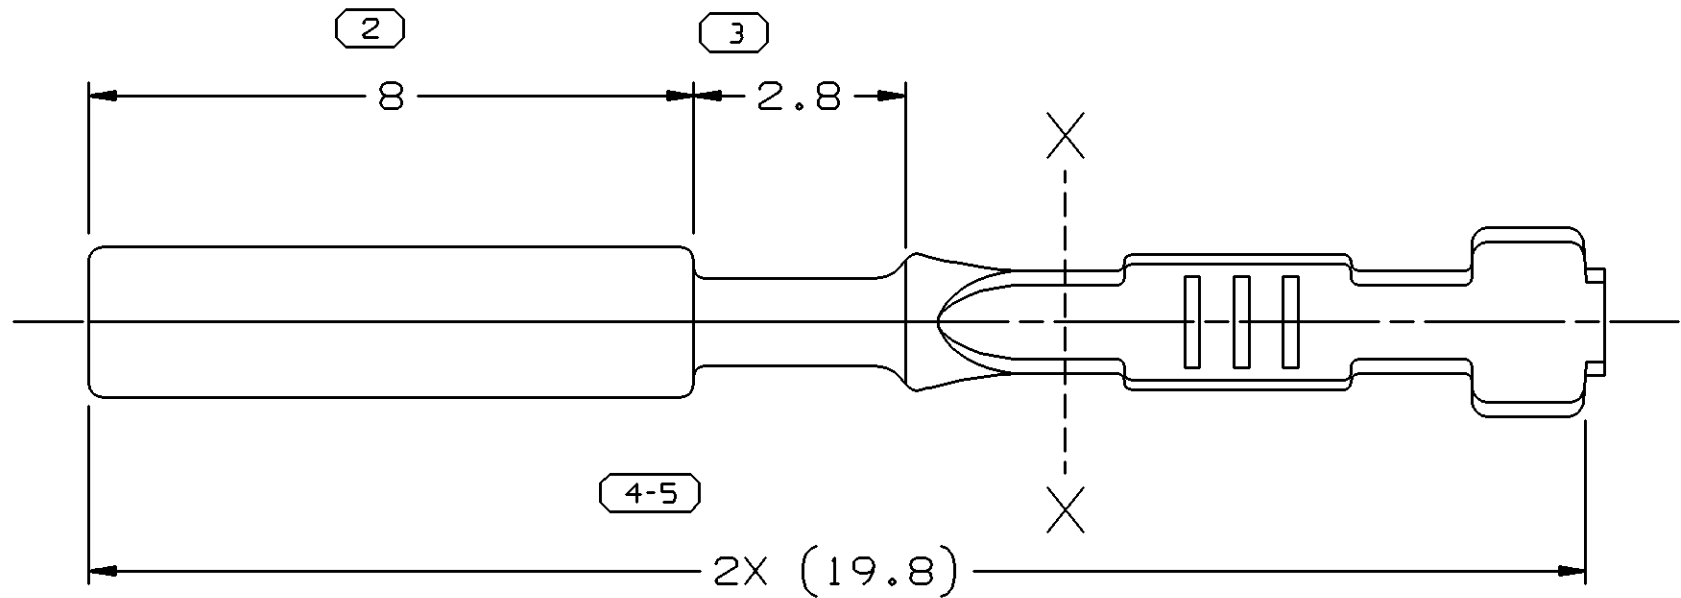

SEE DETAIL "Y"
SECTION A-A

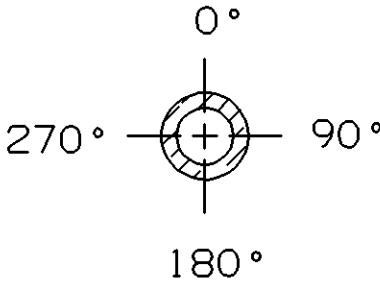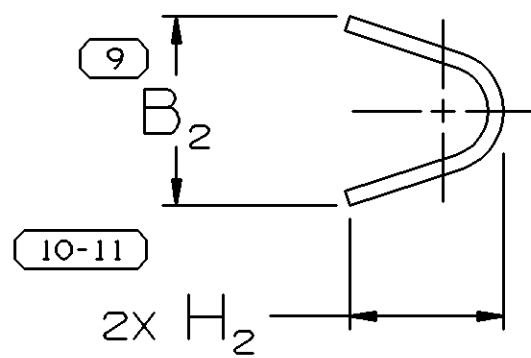

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- MATING COMPONENTS OR EQUIVALENT:
CONNECTOR 15318136
PIN 15318132
- MAXIMUM CURRENT CAPACITY IS 7 AMPS.
- TERMINAL MUST FIT A MAX Ø2.1 MM GAGE HOLE 19.8 MM DEEP AFTER CRIMPING.
- TERMINAL MUST CONFORM TO VPS #B-149
- TERMINAL NECK AREA MUST NOT FRACTURE WHEN 45° BEND TEST IS APPLIED. NO VISIBLE CRACKS UNDER 10x MAGNIFICATION.
- 1.7 MIN FLAT DIM TO BE MEASURED AT 0° TO 180° AND 1.65 MIN FLAT DIM TO BE MEASURED AT 90° TO 270°. SEE SECTION A-A

15435886	01	AB	0.2 X 34.3	M3696KN1		0.35-0.5	21	1.83-1.47	1.8	2.5	1.8	2.1	
15435885	01	AB	0.2 X 34.3	M3696JN9		0.35-0.5	21	1.83-1.47	1.8	2.5	1.8	2.1	
15326244	02	AD	0.2 X 34.3	M3661CN4		0.35-0.5	21	1.83-1.47	1.8	2.5	1.8	2.1	
15305314	02	AG	0.2 X 34.3	M3696JN9	M3661CN2	0.35-0.5	21	1.83-1.47	1.8	2.5	1.8	2.1	
		SIZE		PREFERRED SPEC		OPTIONAL SPEC		SIZE (MM)*	ID NO	DIA			
PART	NO	REV	N/P	MATERIAL			CABLE			(B _{1±0.2})	(B _{2±0.3})	(H ₁)	(H ₂)

6 PROCESS SENSITIVE DIMENSION	
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL RANGE (MM)	CHART C
FROM 0 TO 12	>12
TOLERANCE UNLESS OTHERWISE SPECIFIED	
±0.1	±0.2
ANGULAR TOLERANCE 12°	

THIRD ANGLE PROJECTION	
DO NOT SCALE	USE MATH DATA
UNSPRINGS	

DELPHI	
DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH	
DR	DATE
APVD1 E.A. CACHO	15FE01
APVD2 J. S. ALVARADO	27FE01
APVD3 SHAWN M. MASON	01MR01
APVD4	
APVD5	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
MATERIAL SEE CHART	
DRAWING NAME TAXI TERM F MIC/P 100W	
DRAWING NUMBER 15409817	
SIZE A0	SCALE 10:1
FRAME NO 1	SHEET NO 1 OF 1
STG R	REV 04