

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

76155-5806

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 4 Pair Vertical Backplane Header, Right Guided, Open Endwall, 8 Columns, 96 Circuits, Pin Length 4.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

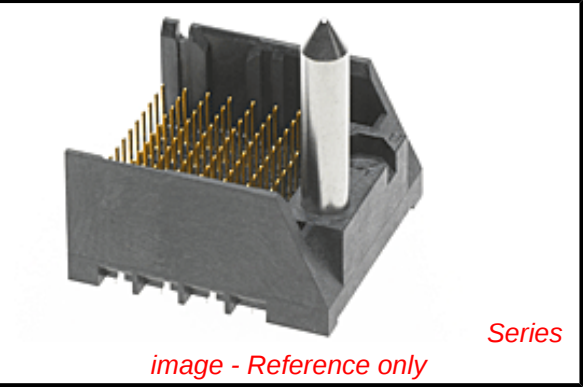

Documents:

3D Model

Drawing (PDF)

Product Specification PS-76060-999 (PDF)

Application Specification AS-76060-990 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification		
UL		E29179
General		
Product Family		Backplane Connectors
Series		76155
Application		Conventional
Application Tooling Documents		TM-622018799
Component Type		PCB Header
Overview		Impact™ Backplane Connector and Cable Assembly System
Product Name		Impact™
UPC		883906417505

Physical	
Circuits (Loaded)	96
Circuits (maximum)	96
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.288/g
Number of Columns	8
Number of Pairs	4
Number of Rows	12
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76155Series

Mates With

76160 Impact™ 100 Ohm Daughtercard

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Backplane Insertion Tool for Signal Contact	0621005800
Press-In Tool for Backplane Module	0622018676
Backplane Header Removal Tool for GbX-U™, I-Trac™, Impact™, or TinMan	0621009610

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990
Electrical Model Document	EE-76160-0001
Product Specification	PS-76060-999
Sales Drawing	SD-76155-003
Symbol/Footprint Data	SYM-76155-5806

This document was generated on 06/04/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION