


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-15-001494	05FEB2015	AP	DD

D


C

B

A

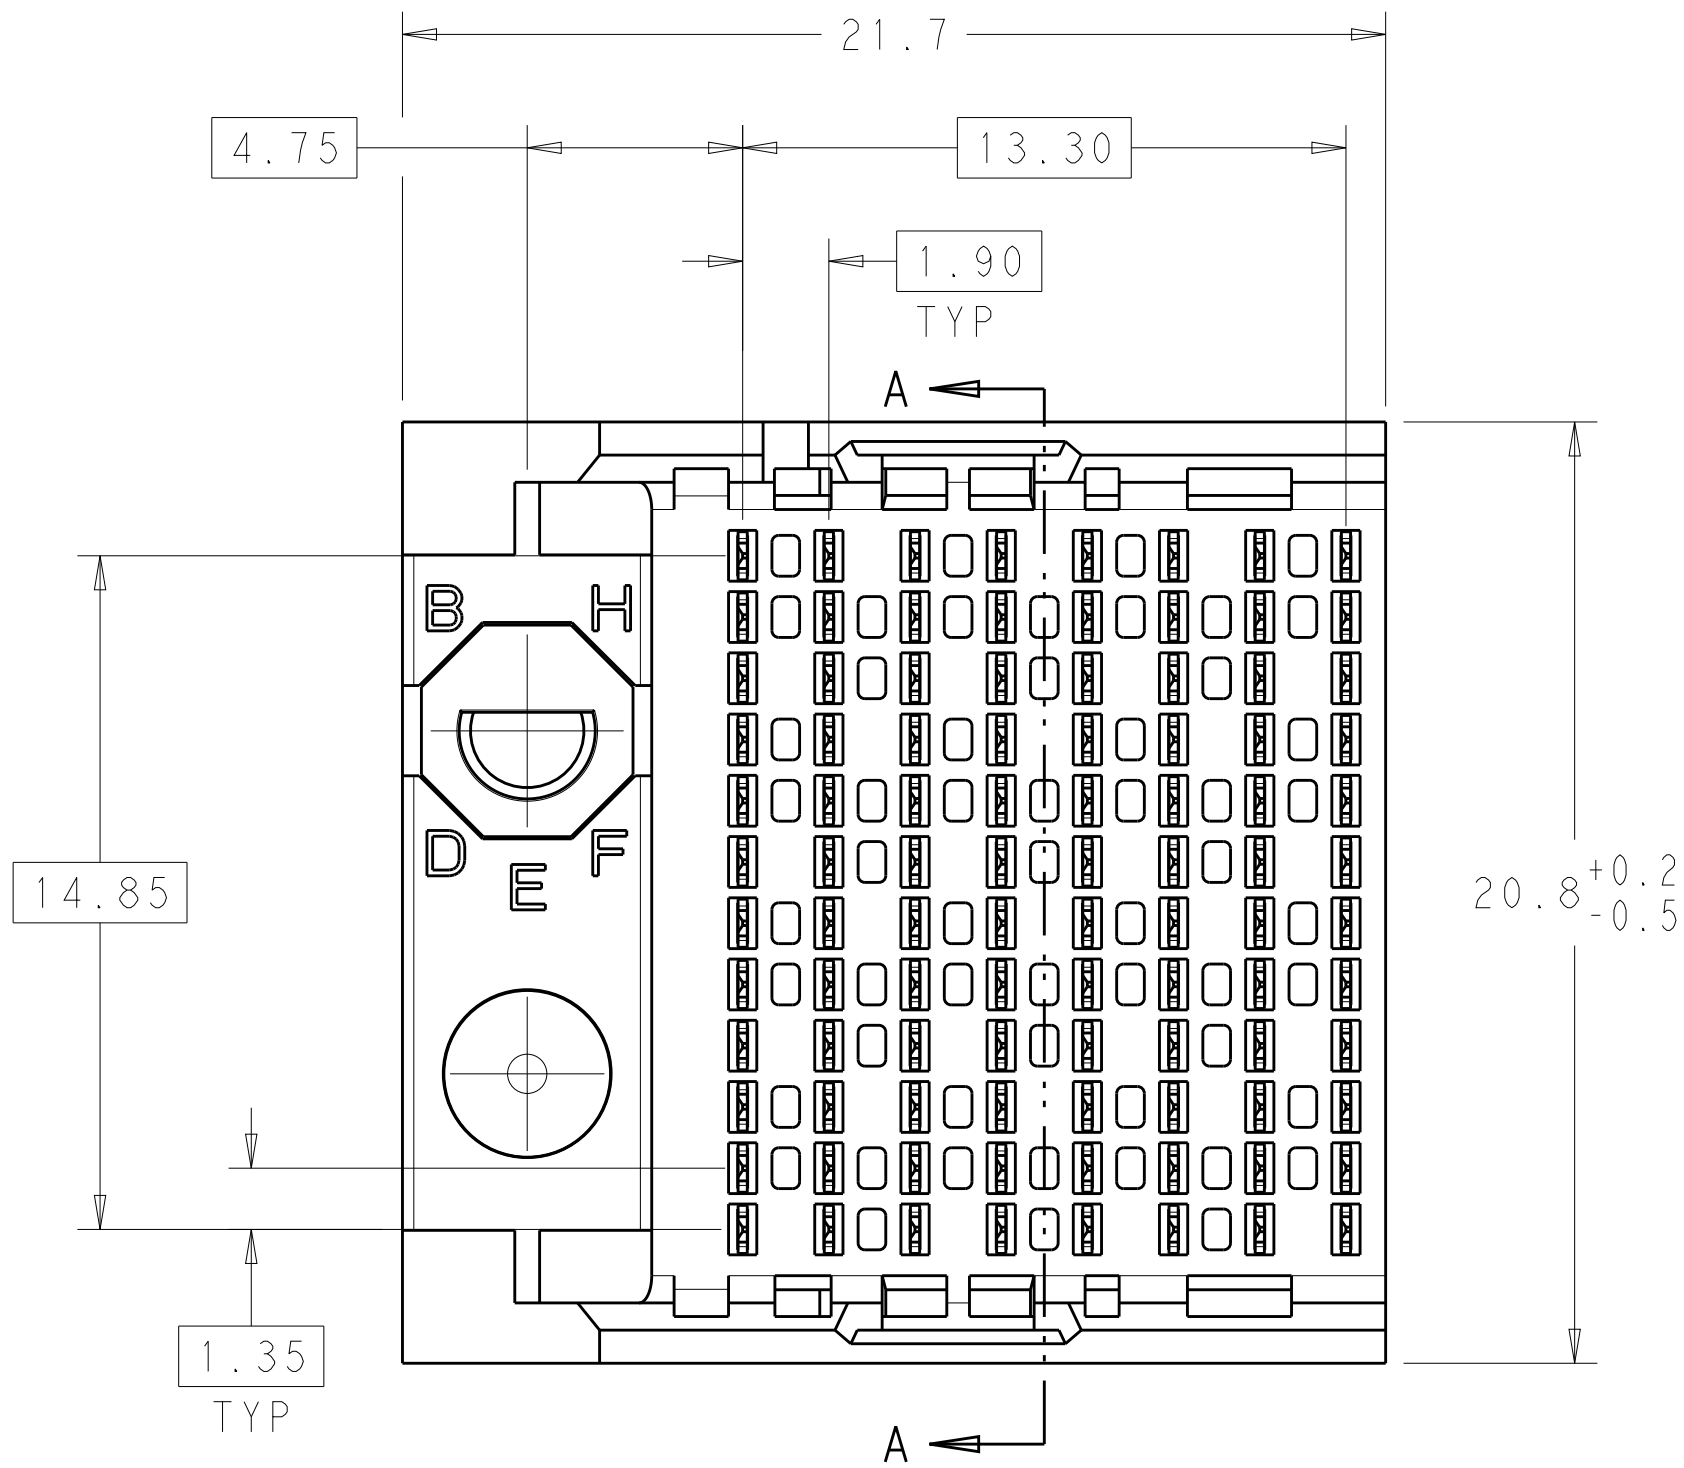

NOTCH DESIGNATES
ROW A

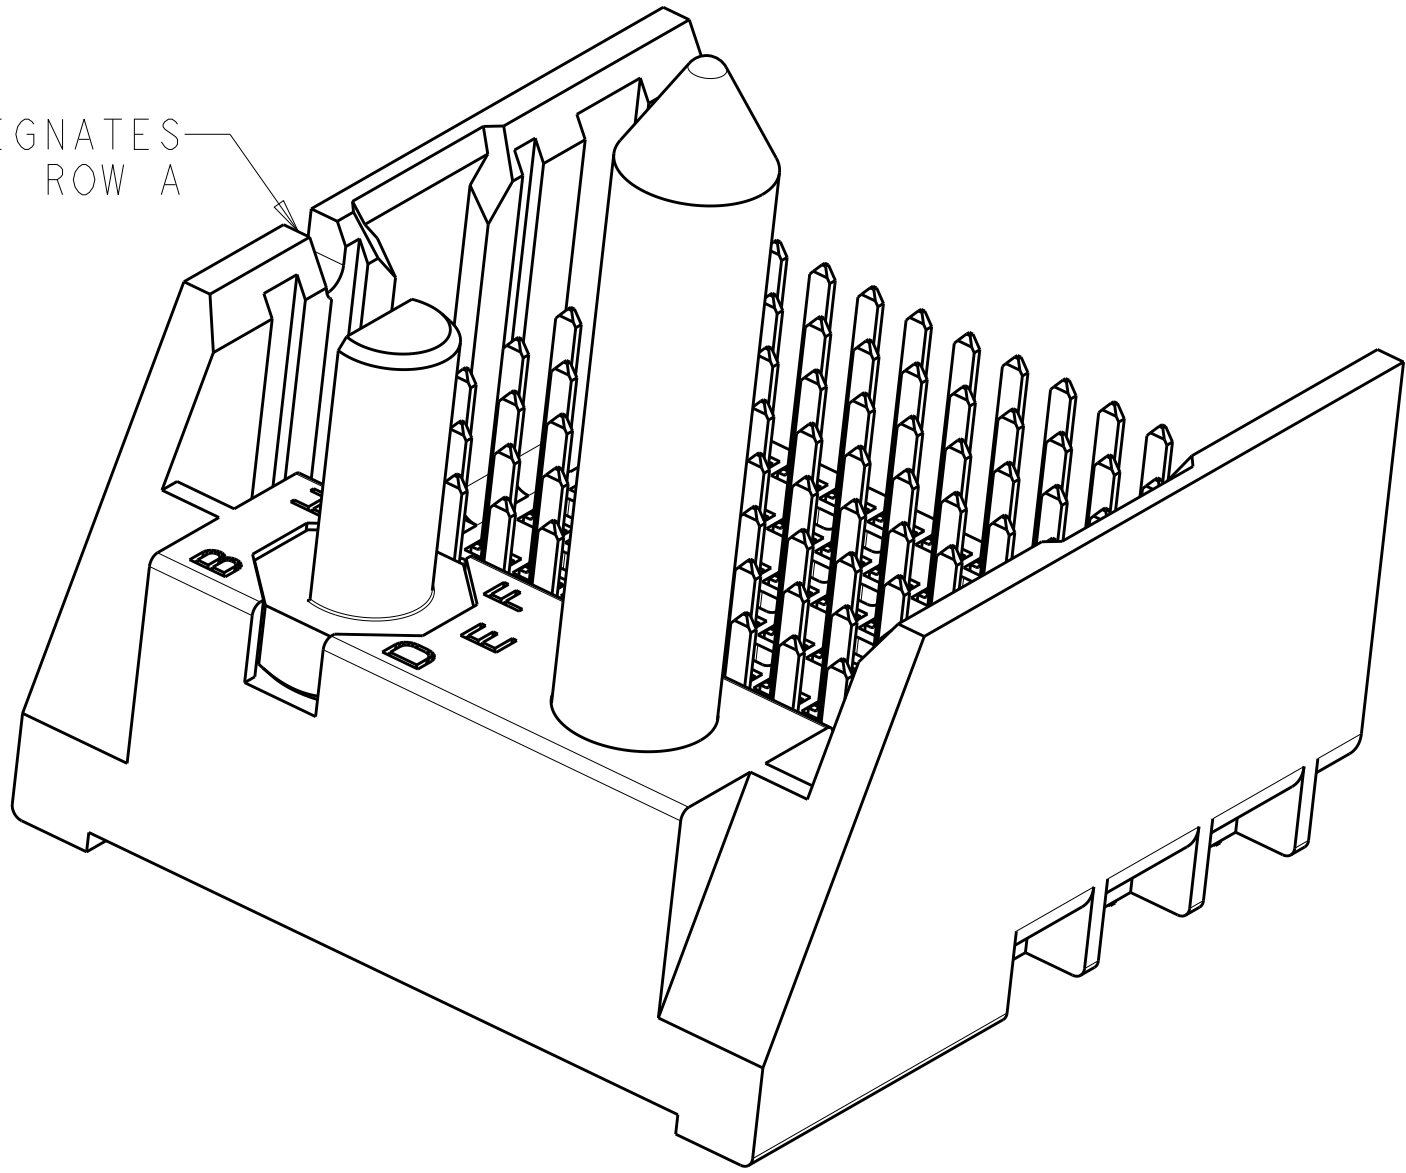


1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.

2 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.


3. SCREWS PACKAGED IN END OF PACKAGING TUBE.

4 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.


5. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

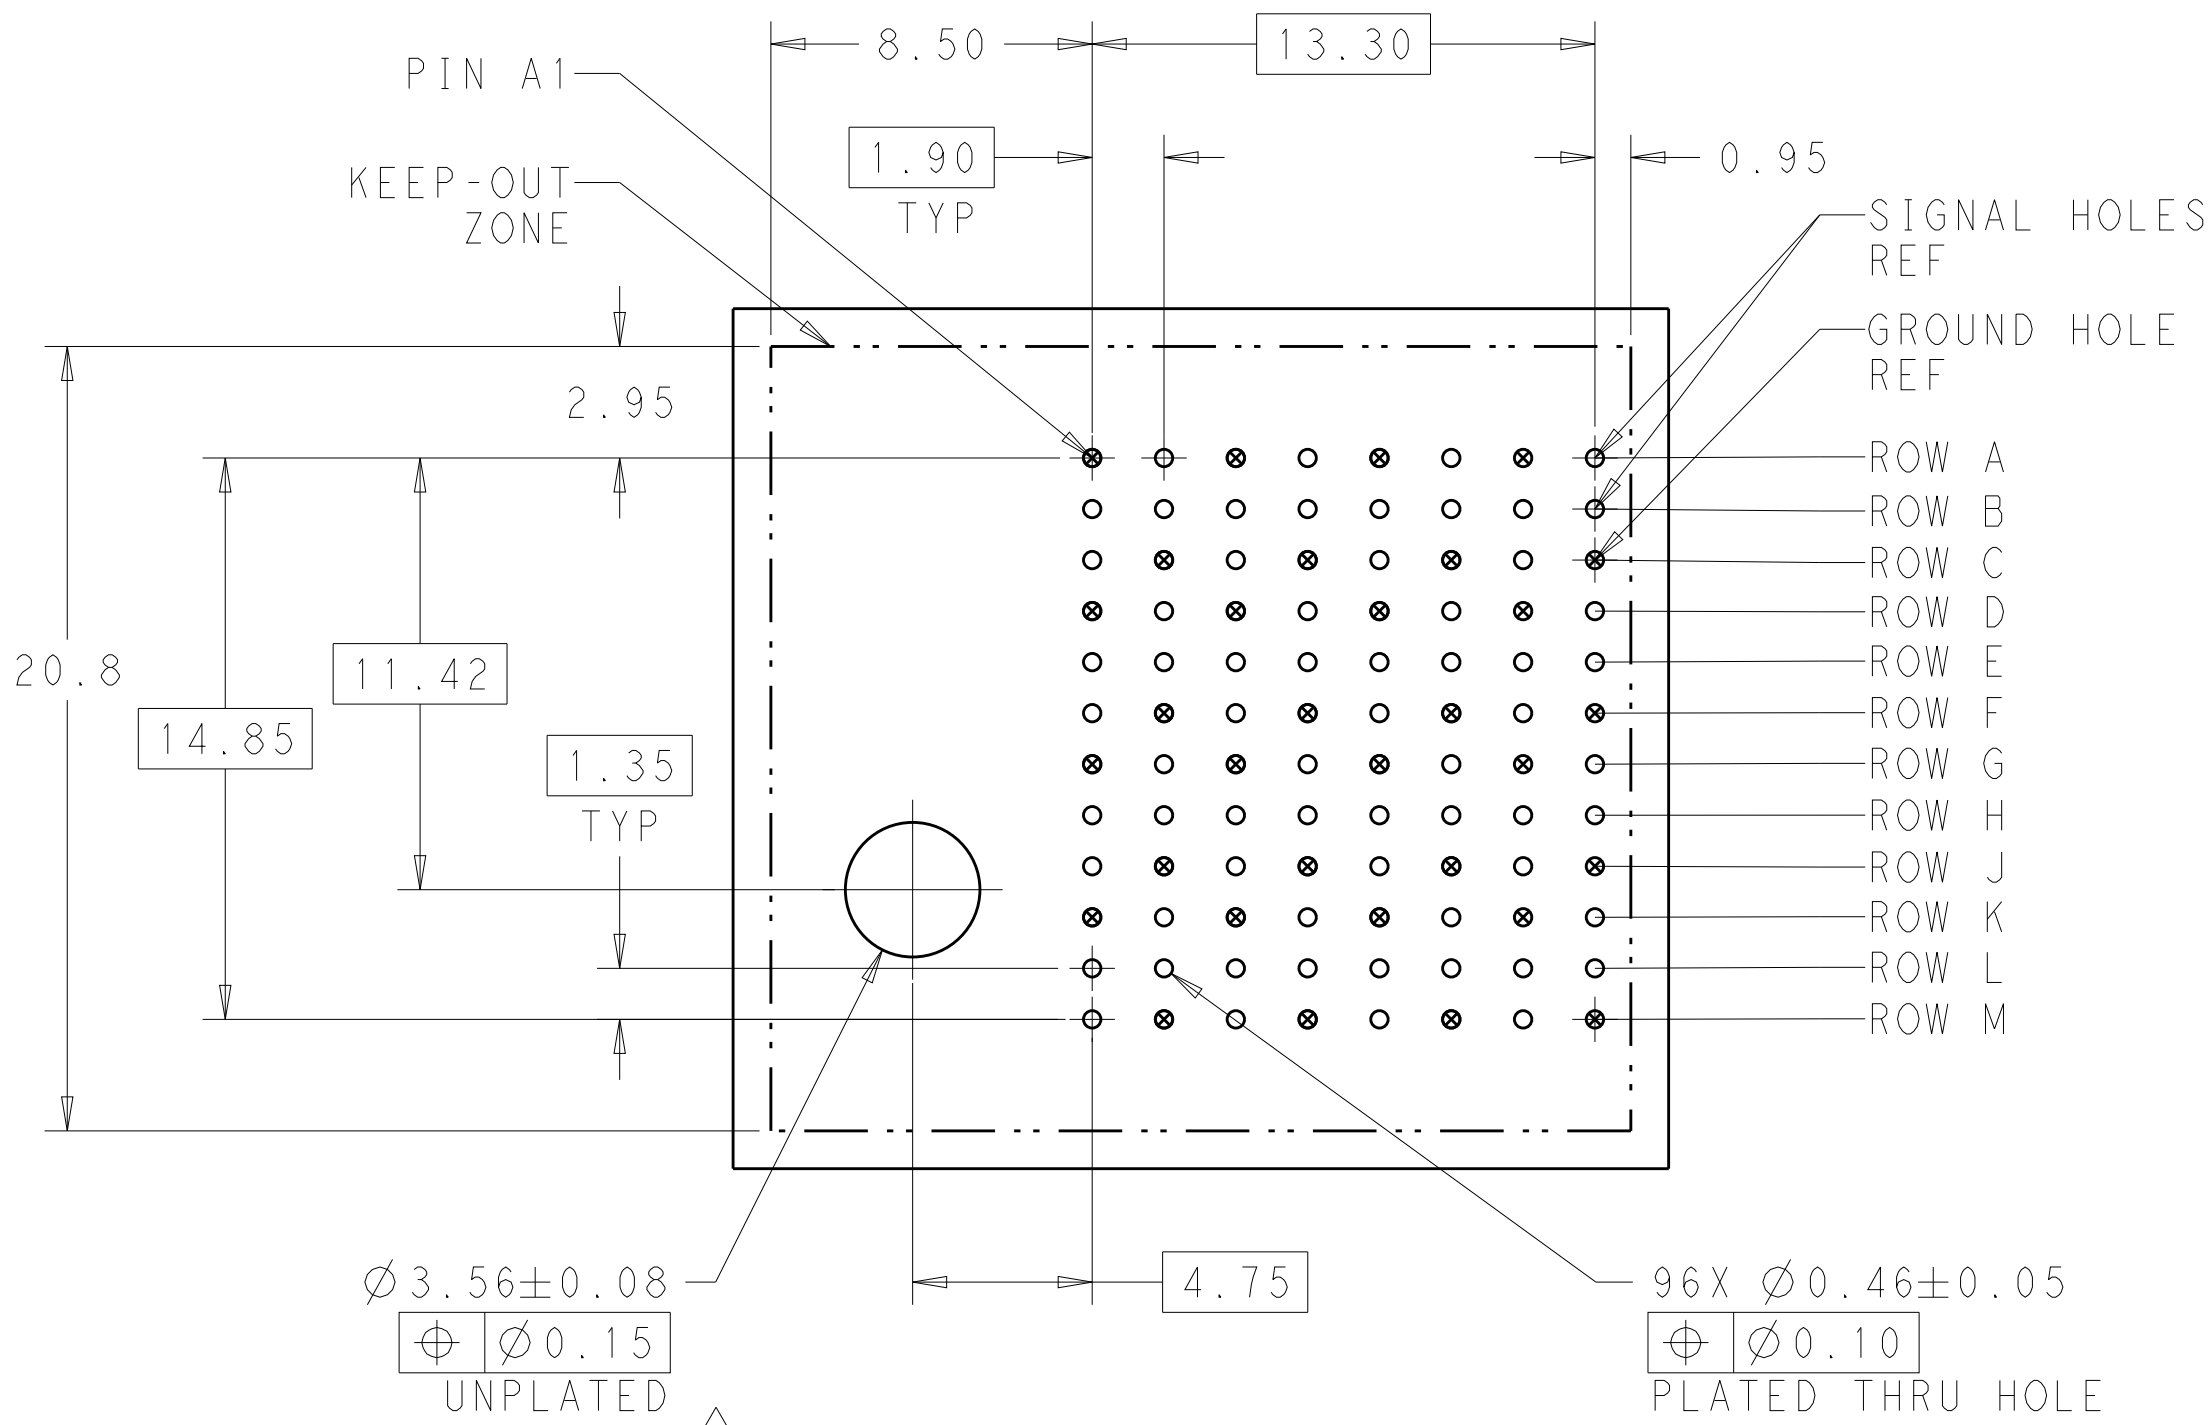

LEFT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

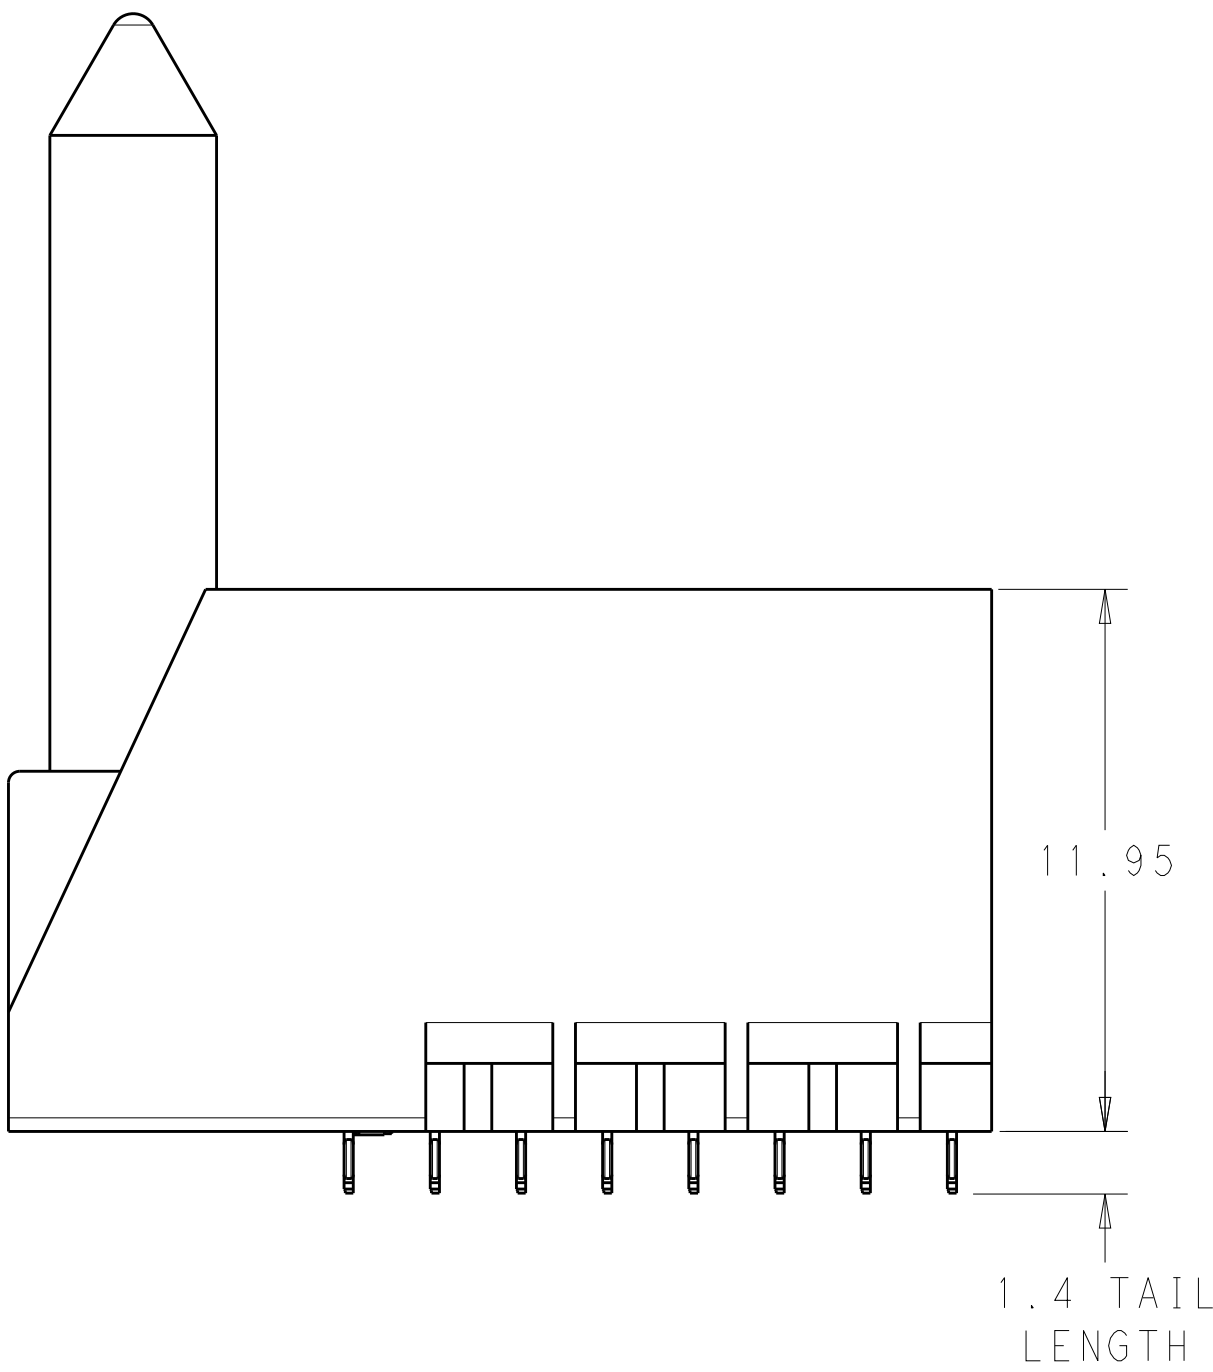

1.00
MINIMUM BOARD
THICKNESS

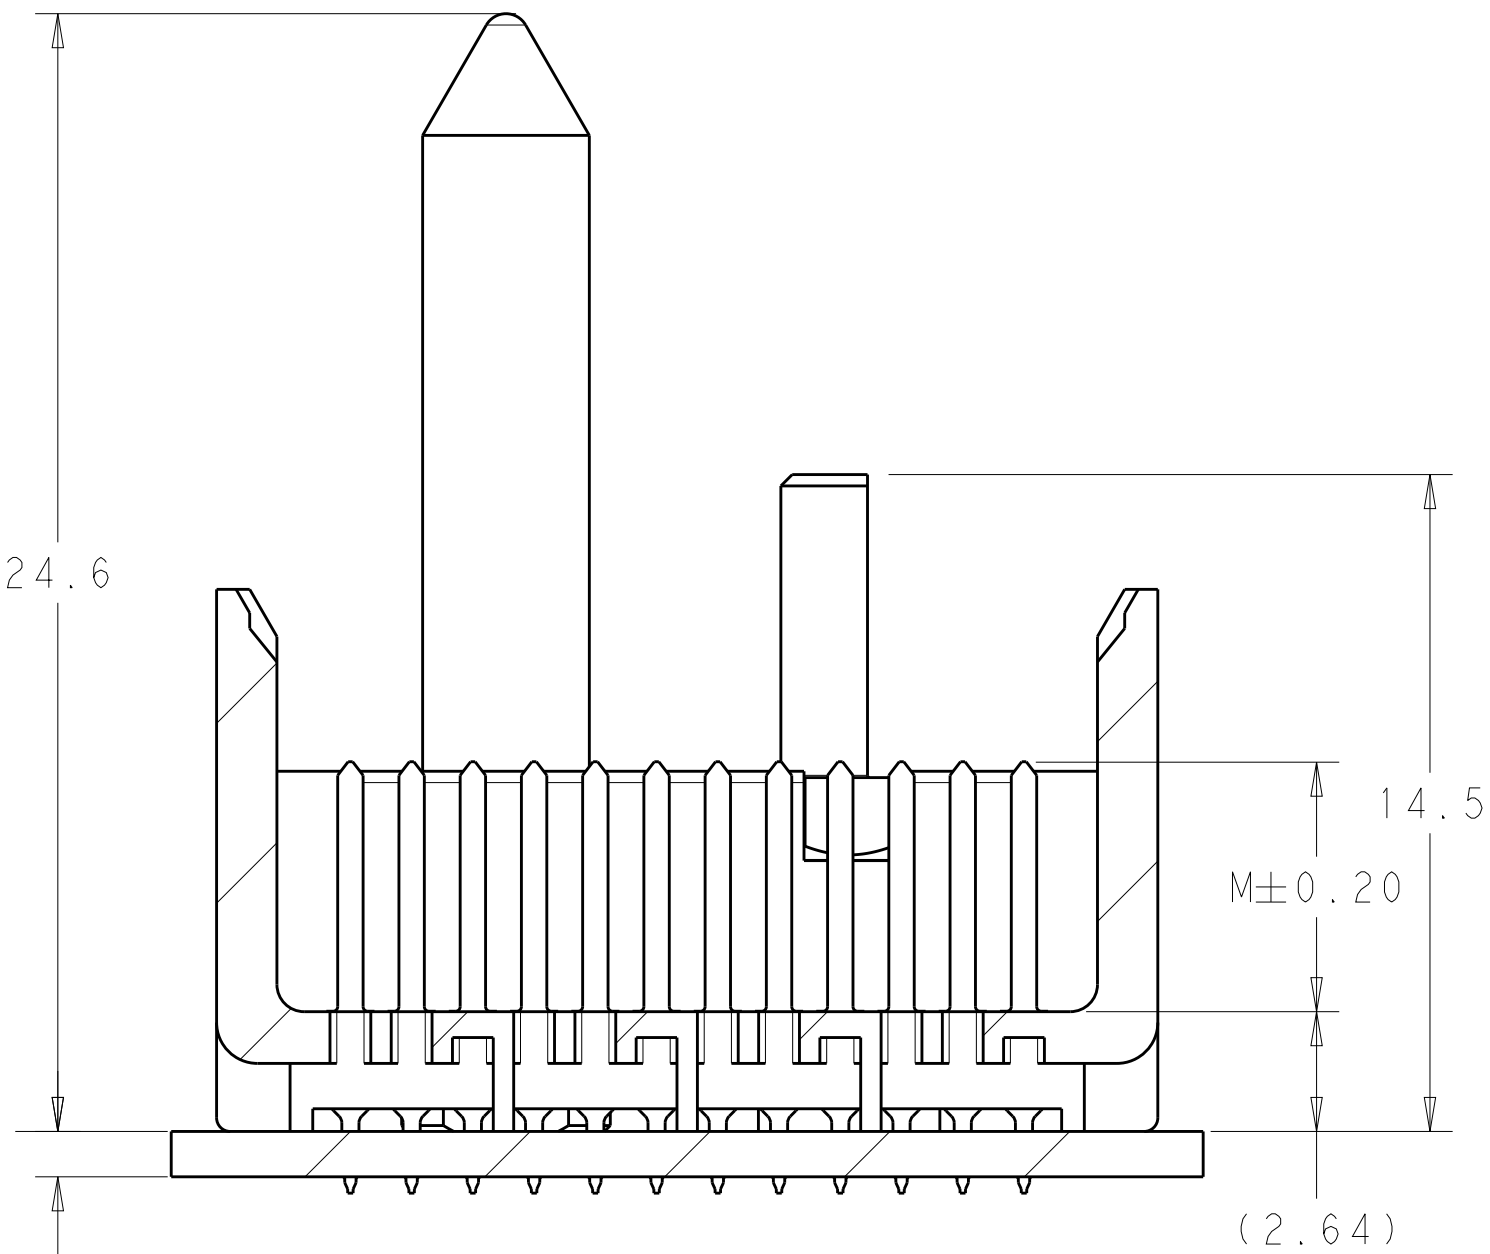

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 18JUL2013	TE Connectivity	
DIMENSIONS:		CHK J. EABY 18JUL2013		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. EABY 18JUL2013	NAME	IMPACT, 4 PAIR, 8 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.46 PTH
	0 PLC ±0.25	PRODUCT SPEC	SIZE	CAGE CODE DRAWING NO
	1 PLC ±0.13	APPLICATION SPEC	RESTRICTED TO	
	2 PLC ±0.13	WEIGHT		
	3 PLC ±0.13	CUSTOMER DRAWING		
	4 PLC ±0.13			
	ANGLES ±0.13			
	FINISH SEE TABLE			
MATERIAL				

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	-	SEE SHEET 1	-	-	-

	H	5.5	8-2057434-3
	H	4.9	8-2057434-2
	H	4.5	8-2057434-1
	G	5.5	7-2057434-3
	G	4.9	7-2057434-2
	G	4.5	7-2057434-1
	F	5.5	6-2057434-3
	F	4.9	6-2057434-2
	F	4.5	6-2057434-1
	E	5.5	5-2057434-3
	E	4.9	5-2057434-2
	E	4.5	5-2057434-1
	D	5.5	4-2057434-3
	D	4.9	4-2057434-2
	D	4.5	4-2057434-1
	C	5.5	3-2057434-3
	C	4.9	3-2057434-2
	C	4.5	3-2057434-1
	B	5.5	2-2057434-3
	B	4.9	2-2057434-2
	B	4.5	2-2057434-1
	A	5.5	1-2057434-3
	A	4.9	1-2057434-2
	A	4.5	1-2057434-1
	-	5.5	2057434-3
	-	4.9	2057434-2
	-	4.5	2057434-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 18JUL2013	TE Connectivity		
DIMENSIONS:		CHK J. EABY 18JUL2013			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. EABY 18JUL2013	NAME	IMPACT, 4 PAIR, 8 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.46 PTH	
	0 PLC ± 1 PLC ±0.25 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH	PRODUCT SPEC	SIZE		
MATERIAL	SEE TABLE	APPLICATION SPEC	CAGE CODE		
-	-	WEIGHT	DRAWING NO	A100779C=2057434	
-	-	CUSTOMER DRAWING	SCALE	5:1	SHEET 2 OF 2 REV A1