


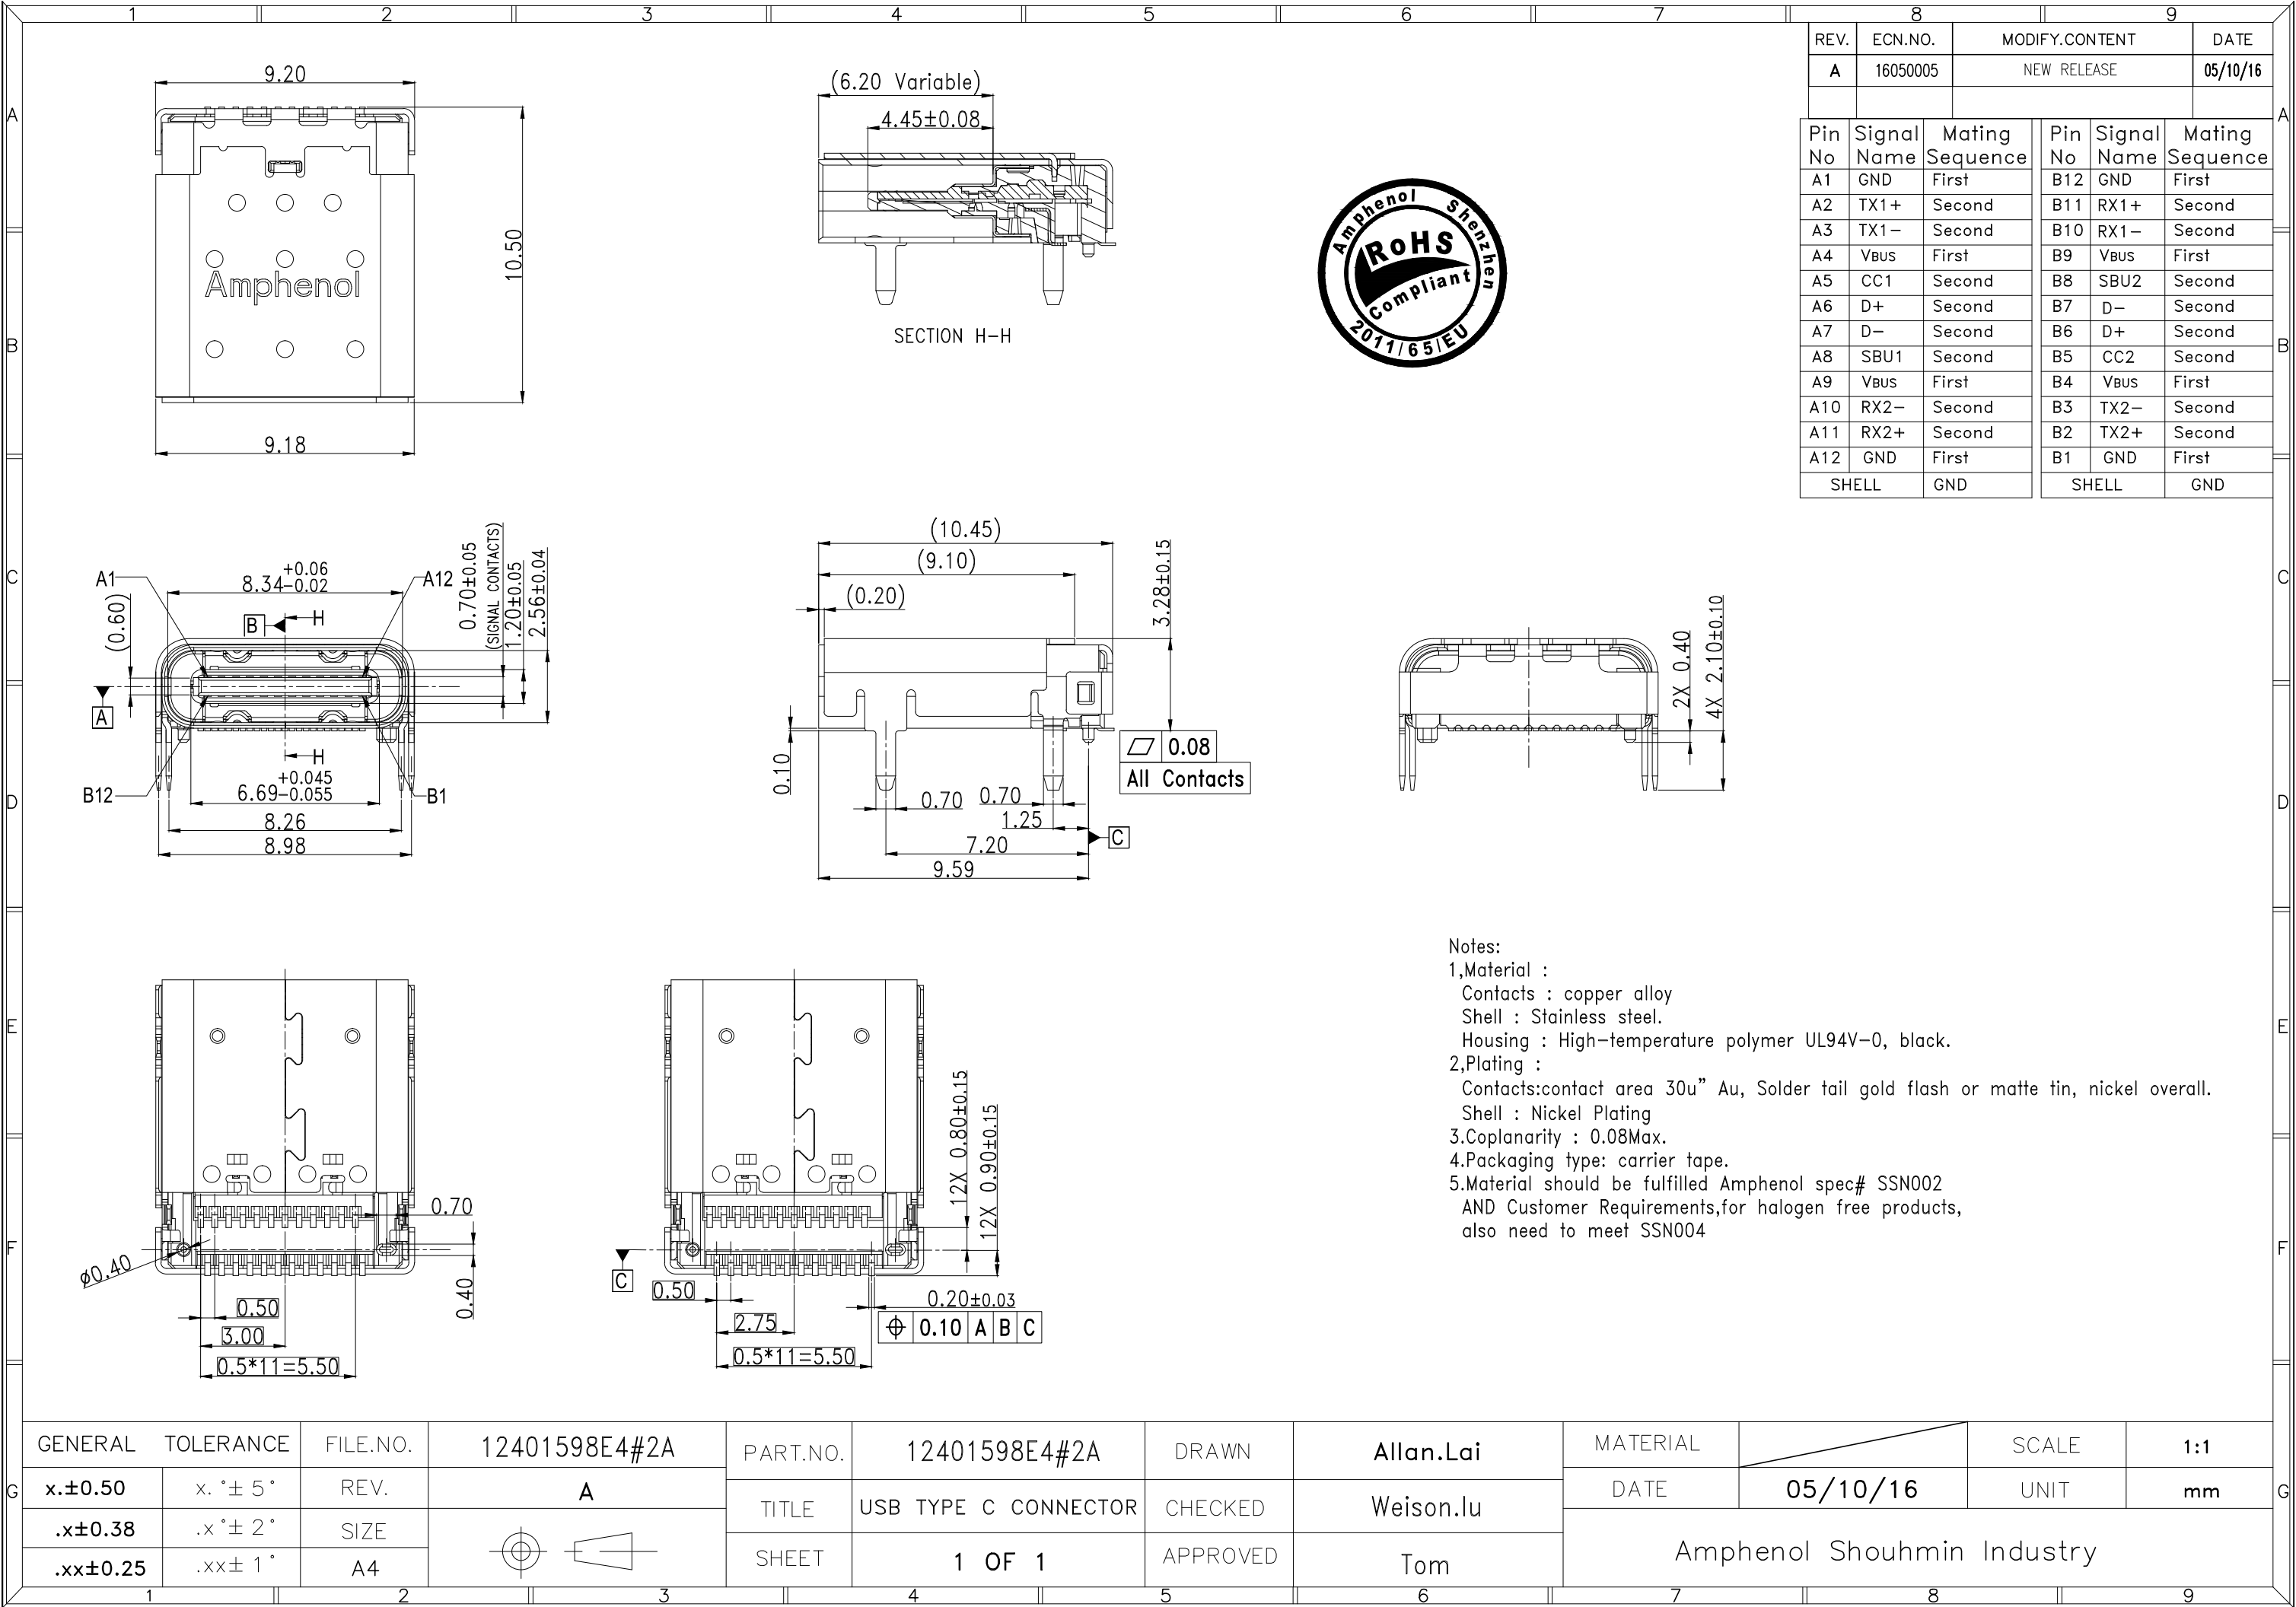


Notes:



- Material :
Contacts : copper alloy
Shell : Stainless steel.
Housing : High-temperature polymer UL94V-0, black.
- Plating :
Contacts:contact area 30u" Au, Solder tail gold flash or matte tin, nickel overall.
Shell : Nickel Plating
- Coplanarity : 0.08Max.
- Packaging type: carrier tape.
- Material should be fulfilled Amphenol spec# SSN002
AND Customer Requirements,for halogen free products,
also need to meet SSN004

GENERAL TOLERANCE		FILE.NO.	12401598E4#2A	PART.NO.	12401598E4#2A	DRAWN	Allan.Lai	MATERIAL			SCALE	1:1
x.±0.50	x. °± 5 °	REV.	A	TITLE	USB TYPE C CONNECTOR	CHECKED	Weison.lu	DATE	05/10/16	UNIT	mm	
.x±0.38	.x °± 2 °	SIZE		SHEET	1 OF 1	APPROVED	Tom	Amphenol Shouhmin Industry				
.xx±0.25	.xx± 1 °	A4										

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A	16050005		05/10/16

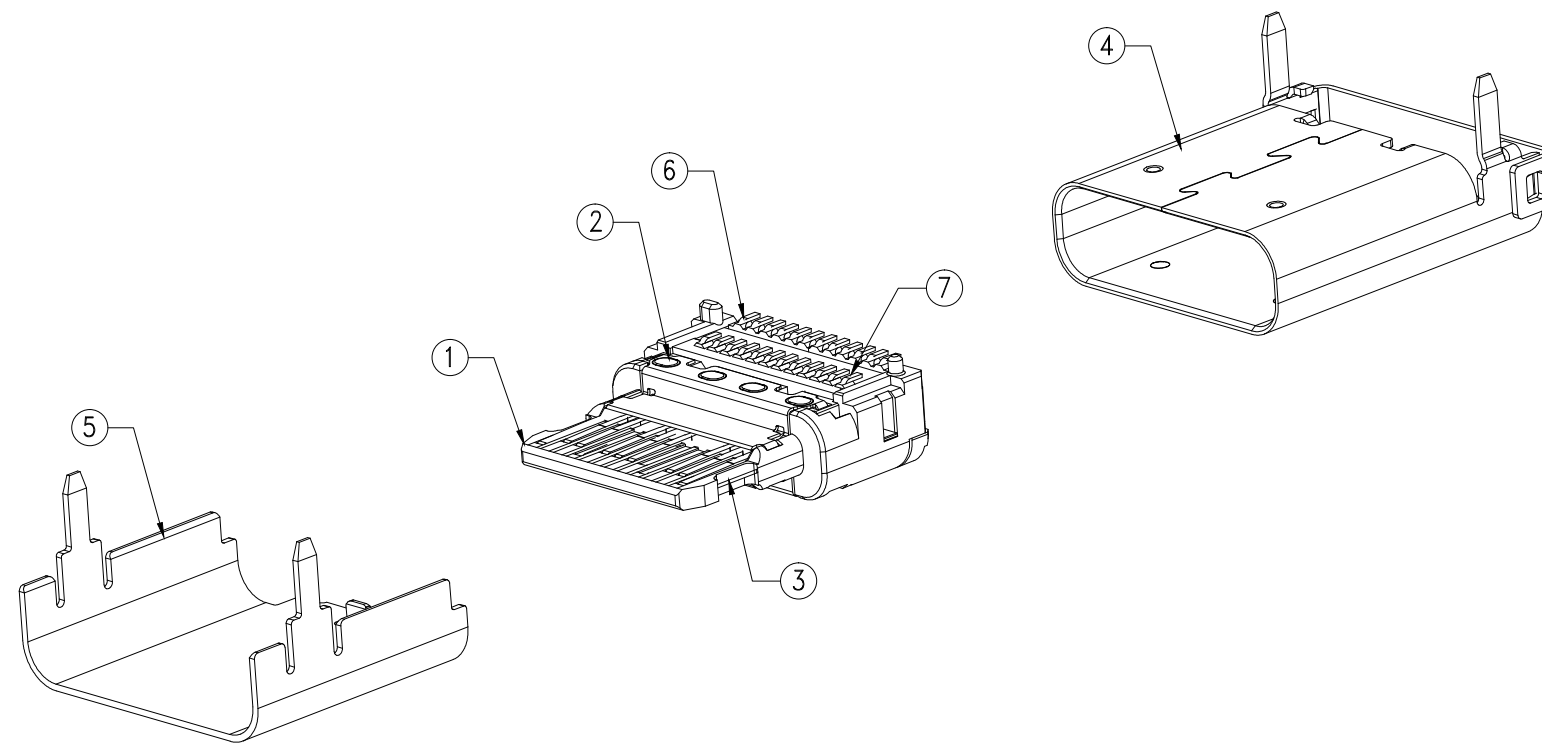

EXPLODE VIEW (SCALE N/A)

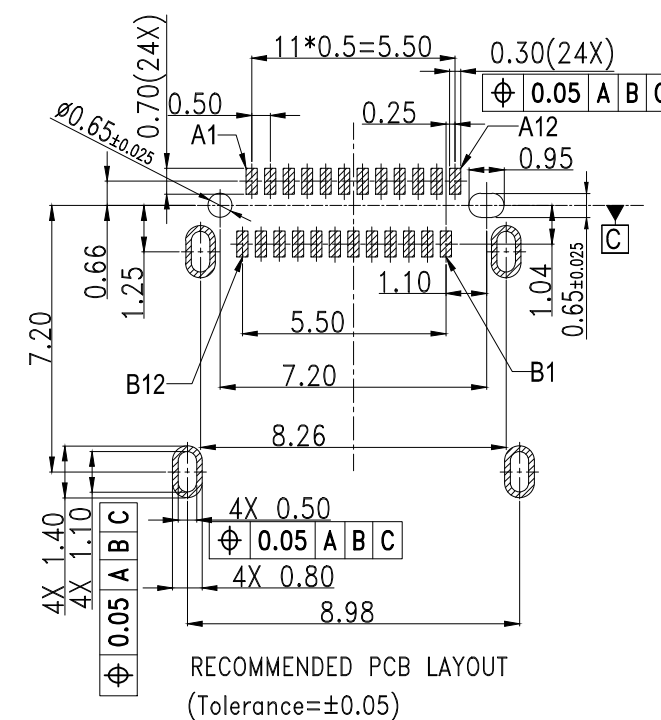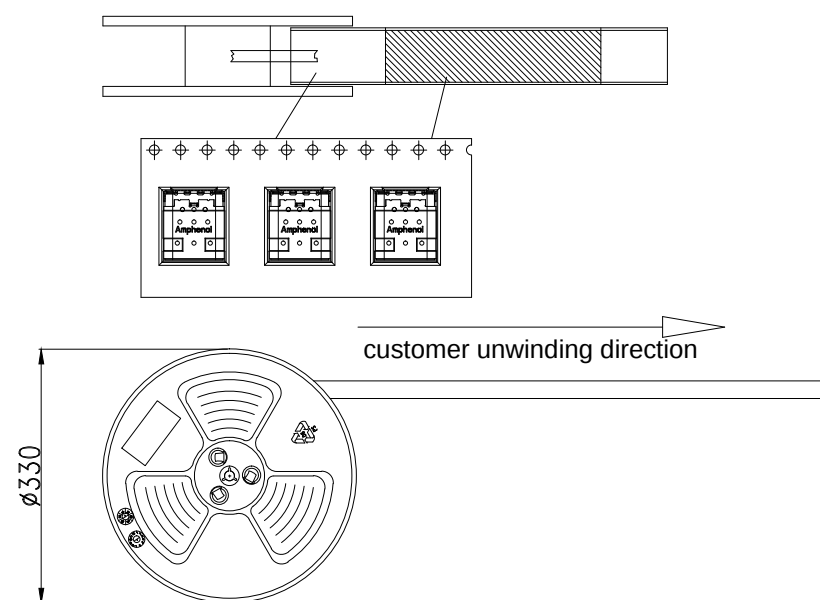

7	BOTTOM TERMINAL	12	Copper alloy	CONTACT:30u" AU MIN; SOLDER TAIL:100u" MATTE TIN MIN;
6	TOP TERMINAL	12	Copper alloy	CONTACT:30u" AU MIN; SOLDER TAIL:100u" MATTE TIN MIN;
5	OUTER SHELL	1	Stainless steel	SOLDER NICKEL: 50U" MIN
4	MAIN SHELL	1	Stainless steel	SOLDER NICKEL: 50U" MIN
3	GND SHEET	1	Stainless steel	SOLDER NICKEL: 50U" MIN
2	EMC	2	Stainless steel	SOLDER NICKEL: 50U" MIN
1	MAIN HOUSING	1	Nylon	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH

G	GENERAL TOLERANCE		FILE.NO.	12401598E4#2A	PART.NO.	12401598E4#2A	DRAWN	Allan.Lai	MATERIAL		SCALE	1:1	
	x.±0.50	x. °± 5 °	REV.	A		TITLE	USB TYPE C CONNECTOR	CHECKED	Weison.lu	DATE	05/10/16	UNIT	mm
	.x±0.38	.x °± 2 °	SIZE			SHEET	1 OF 1	APPROVED	Tom	Amphenol Shouhmin Industry			
	.xx±0.25	.xx± 1 °	A4										

