



LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
GP	00		A	RELEASED PER ECO-14-008758	13JUN2014	CJV	PAR	
			B	REVISED PER ECO-15-010819	10AUG2015	PP	SH	

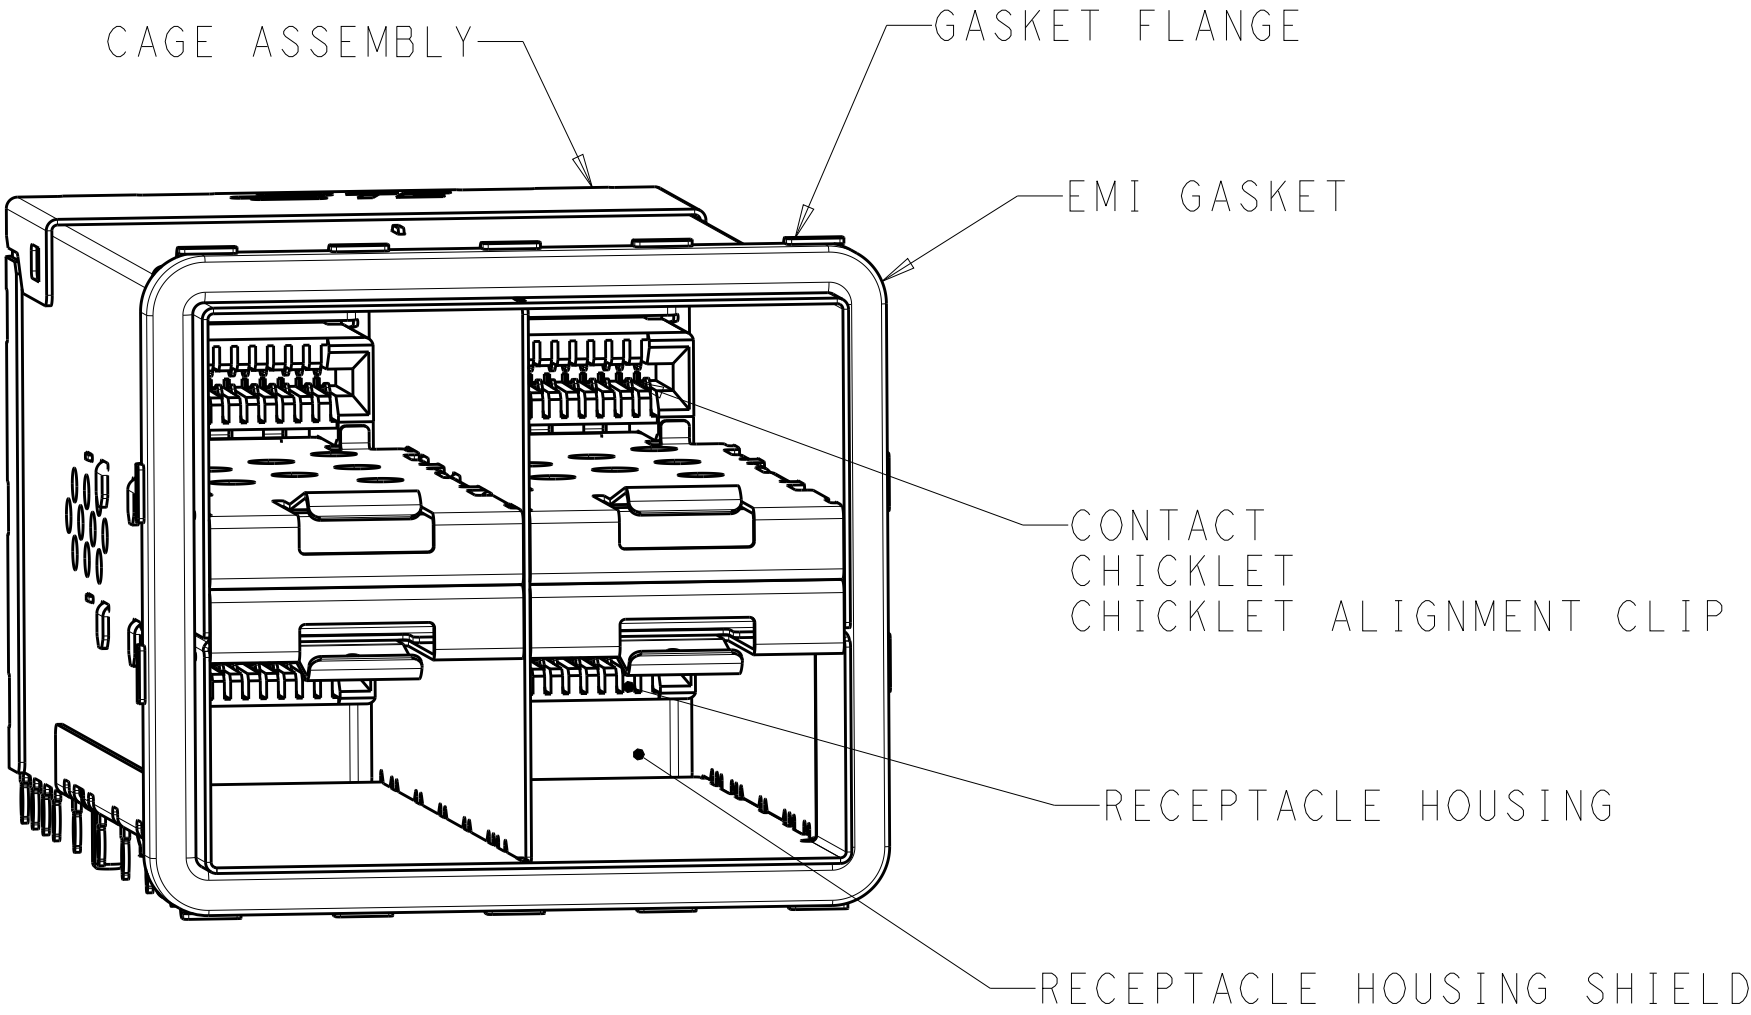

2198325-1
SCALE 3:1

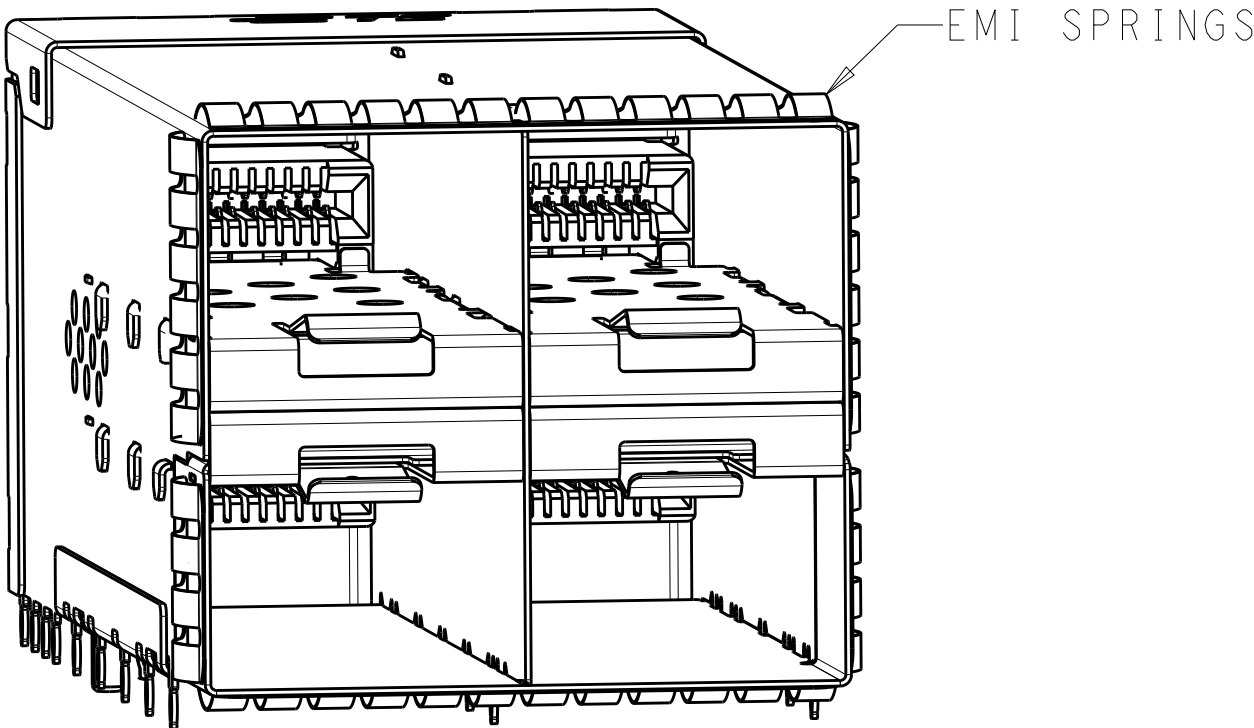

2198325-5
SCALE 3:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-0 RATED
CONNECTOR HOUSING SHIELD - COPPER ALLOY
CHICKLET - LCP, BLACK, UL 94V-0 RATED
CHICKLET ALIGNMENT CLIP - PBT
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE HOUSING - ZINC ALLOY

2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION
108-2481, BASED ON EIA/ECA-364-1000.01A, CONTROLLED
ENVIRONMENT APPLICATIONS) ON MATING INTERFACE,
TIN ON NEEDLE EYE


3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319


5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm

6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY


7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE
DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS
AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED
WITHIN CONNECTOR HOLE PATTERN

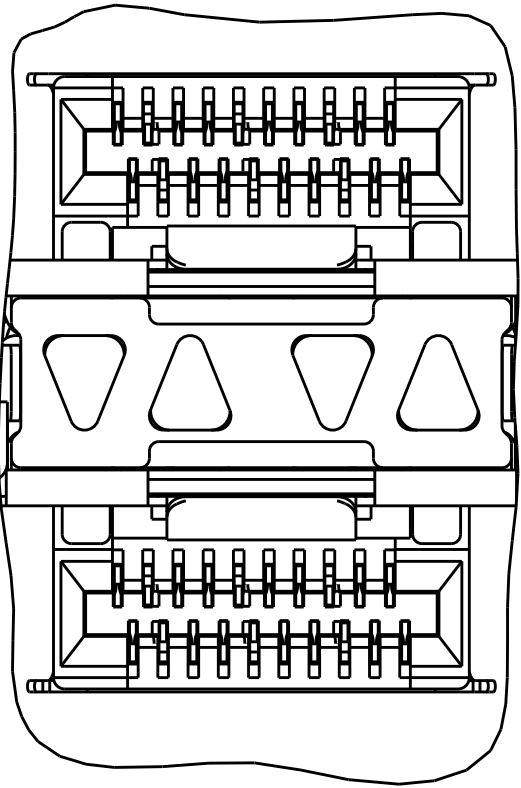


INNER/OUTER LIGHT PIPES
2198325-2, 2198325-6
SCALE 5:1

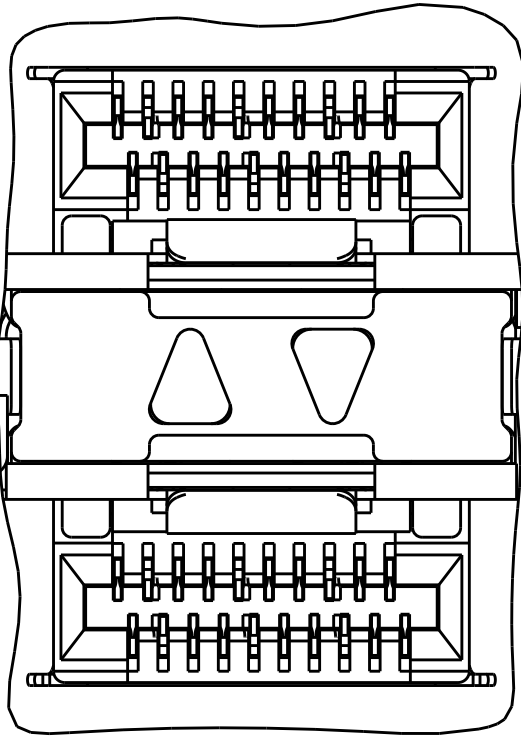


INNER LIGHT PIPES
2198325-3, 2198325-7
SCALE 5:1

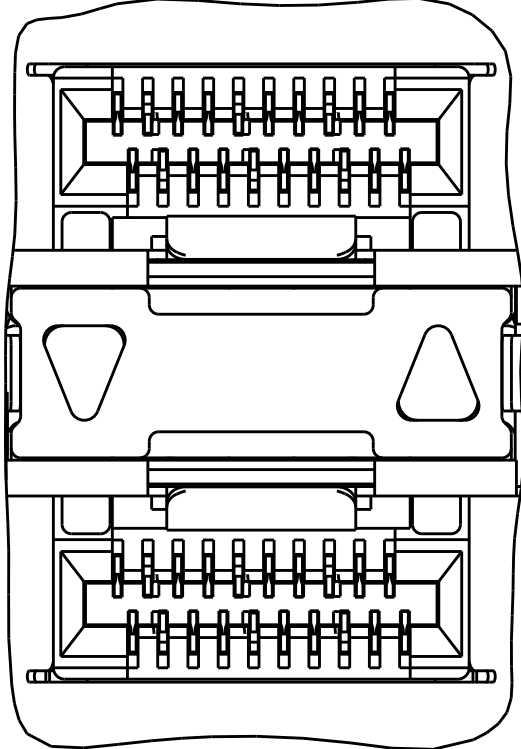

OUTER LIGHT PIPES
2198325-4, 2198325-8
SCALE 5:1

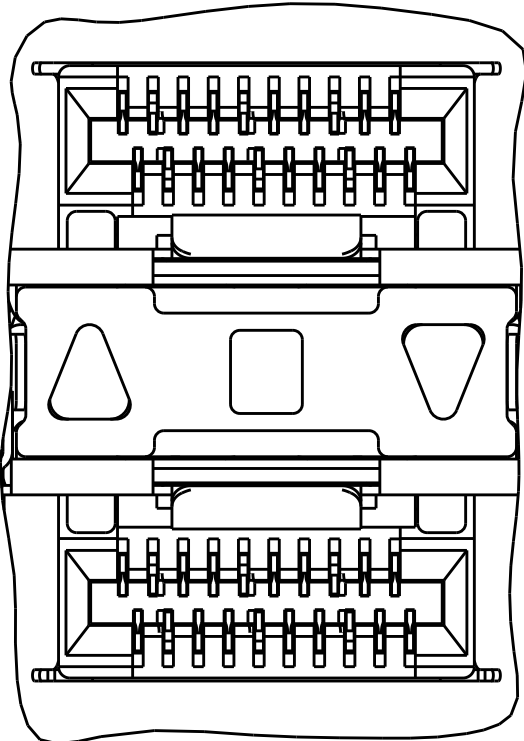


CENTER/REVERSED OUTER LIGHT PIPES
1-2198325-7, 1-2198325-9
SCALE 5:1

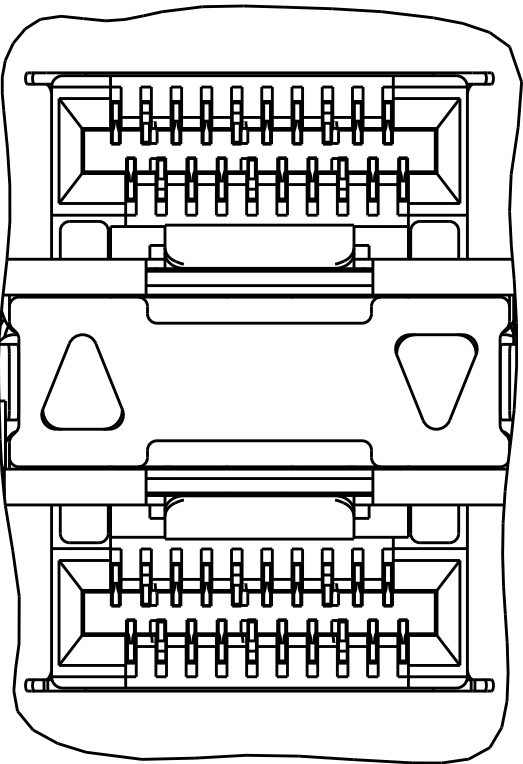

REVERSED OUTER LIGHT PIPES
1-2198325-8, 2-2198325-0
SCALE 5:1

31	EMI SPRINGS	REVERSED OUTER	2-2198325-0
		CENTER/REVERSED OUTER	1-2198325-9
33.75	EMI GASKET	REVERSED OUTER	1-2198325-8
		CENTER/REVERSED OUTER	1-2198325-7
31	EMI SPRINGS	OUTER	2198325-8
		INNER	2198325-7
		INNER/OUTER	2198325-6
		NONE	2198325-5
33.75	EMI GASKET	OUTER	2198325-4
		INNER	2198325-3
		INNER/OUTER	2198325-2
		NONE	2198325-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER CHK M.D. MORRISON APVD M.D. MORRISON	06OCT2011 06OCT2011 07OCT2011	TE TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.010 1 PLC ±.015 2 PLC ±.020 3 PLC ±.025 4 PLC ±.030 ANGLES ±.010		PRODUCT SPEC 108-2481 APPLICATION SPEC 114-13319	
MATERIAL SEE NOTES		FINISH SEE NOTES		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		WEIGHT -		A100779C=2198325	
		Customer Drawing		SCALE 2:1 SHEET 1 OF 5 REV B	

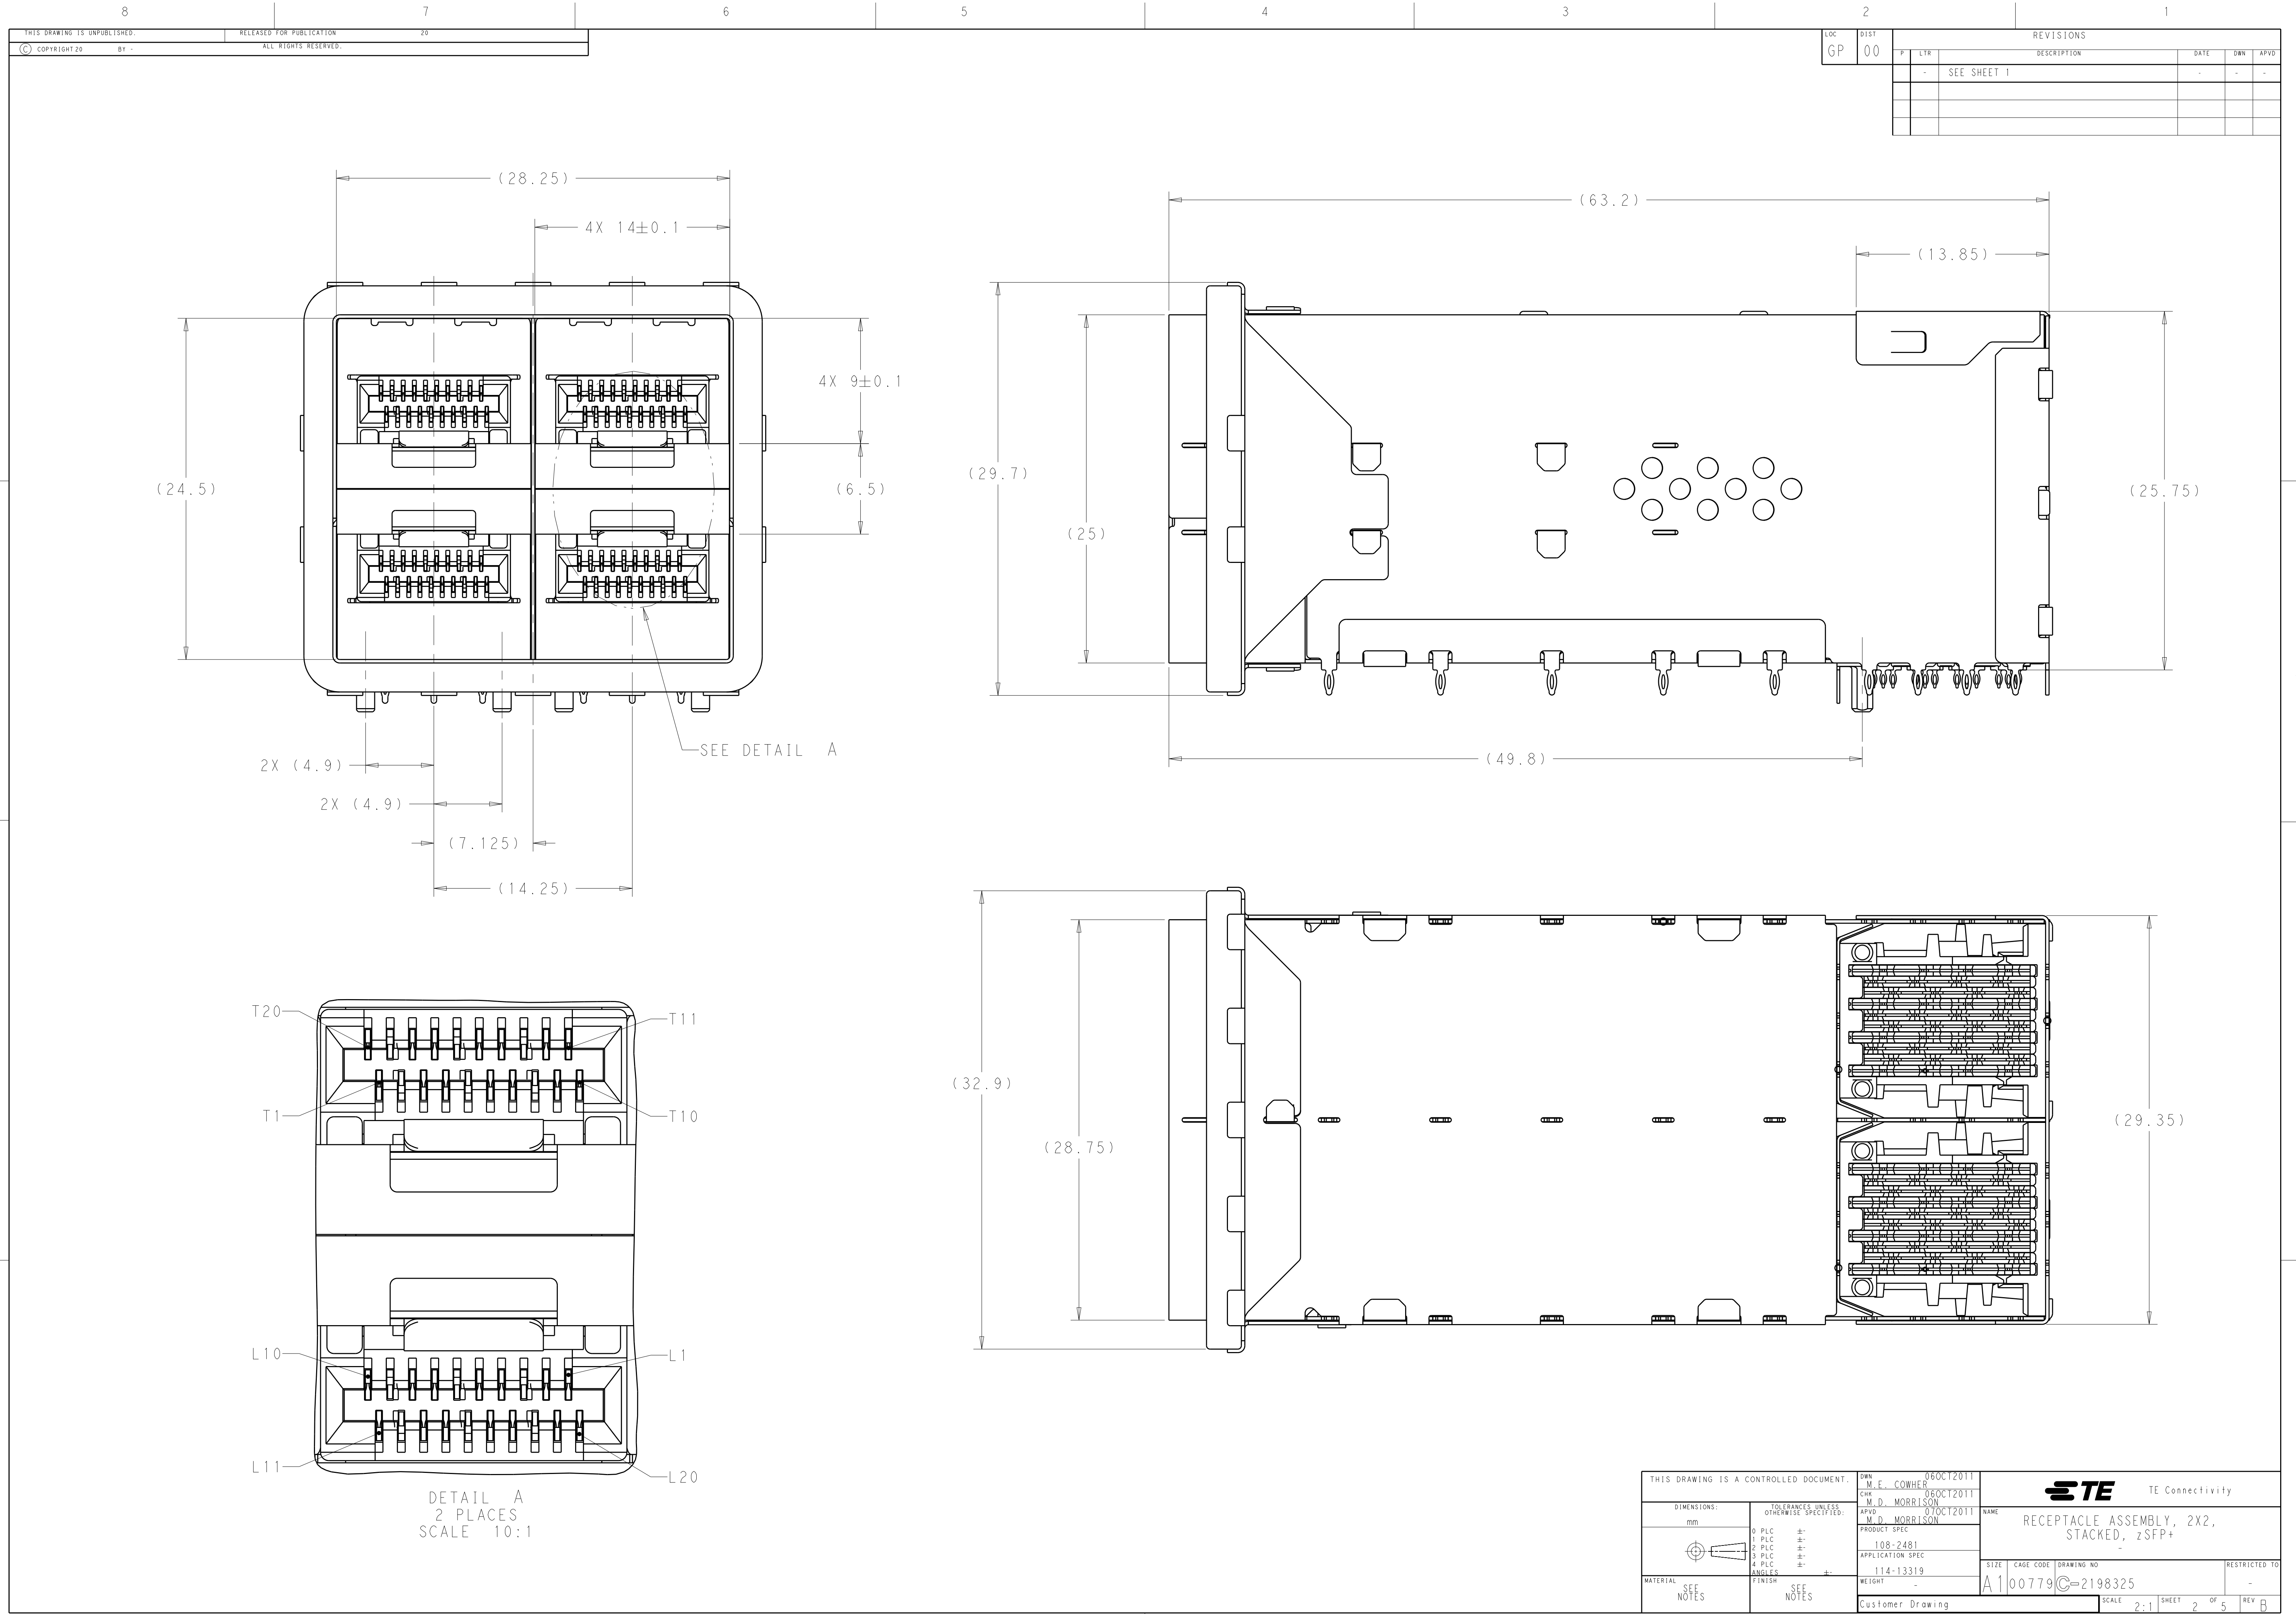

LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE NOTES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±
±
±
±
±
±

SEE NOTES

DWN
M.E. CONWHER
CHK
M.D. MORRISON
APVD
M.D. MORRISON

06OCT2011
06OCT2011
07OCT2011

PRODUCT SPEC
108-2481
APPLICATION SPEC
114-13319
WEIGHT
-

Customer Drawing

NAME
RECEPTACLE ASSEMBLY, 2X2, STACKED, zSFP+

SIZE
A1

CAGE CODE
00779

DRAWING NO.
C=2198325

RESTRICTED TO
-

SCALE
2:1



SHEET
2

OF
5

REV
B

TE Connectivity





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

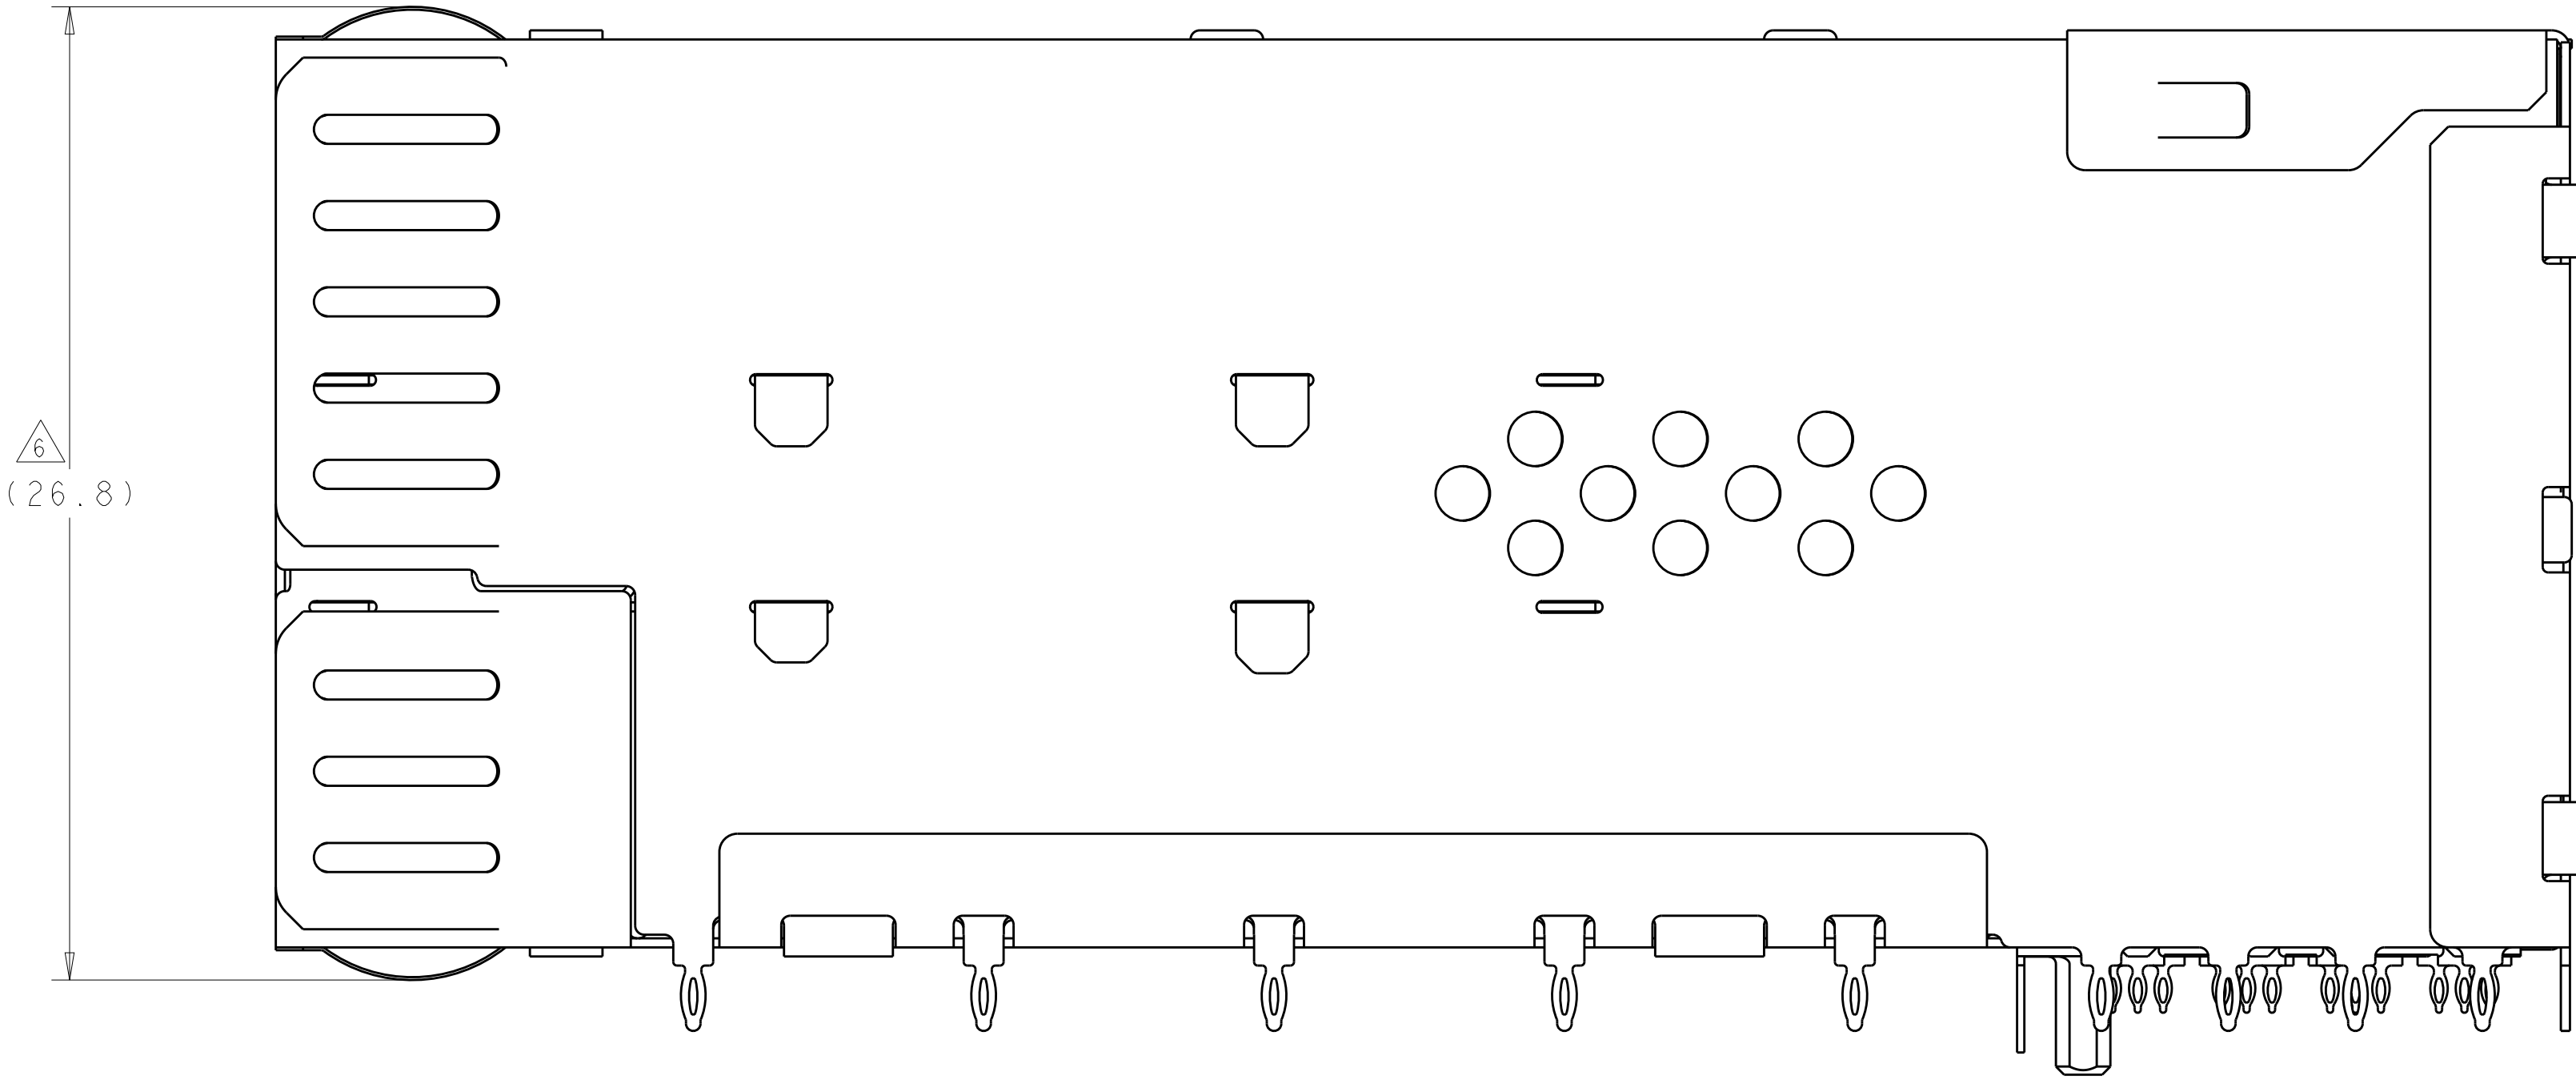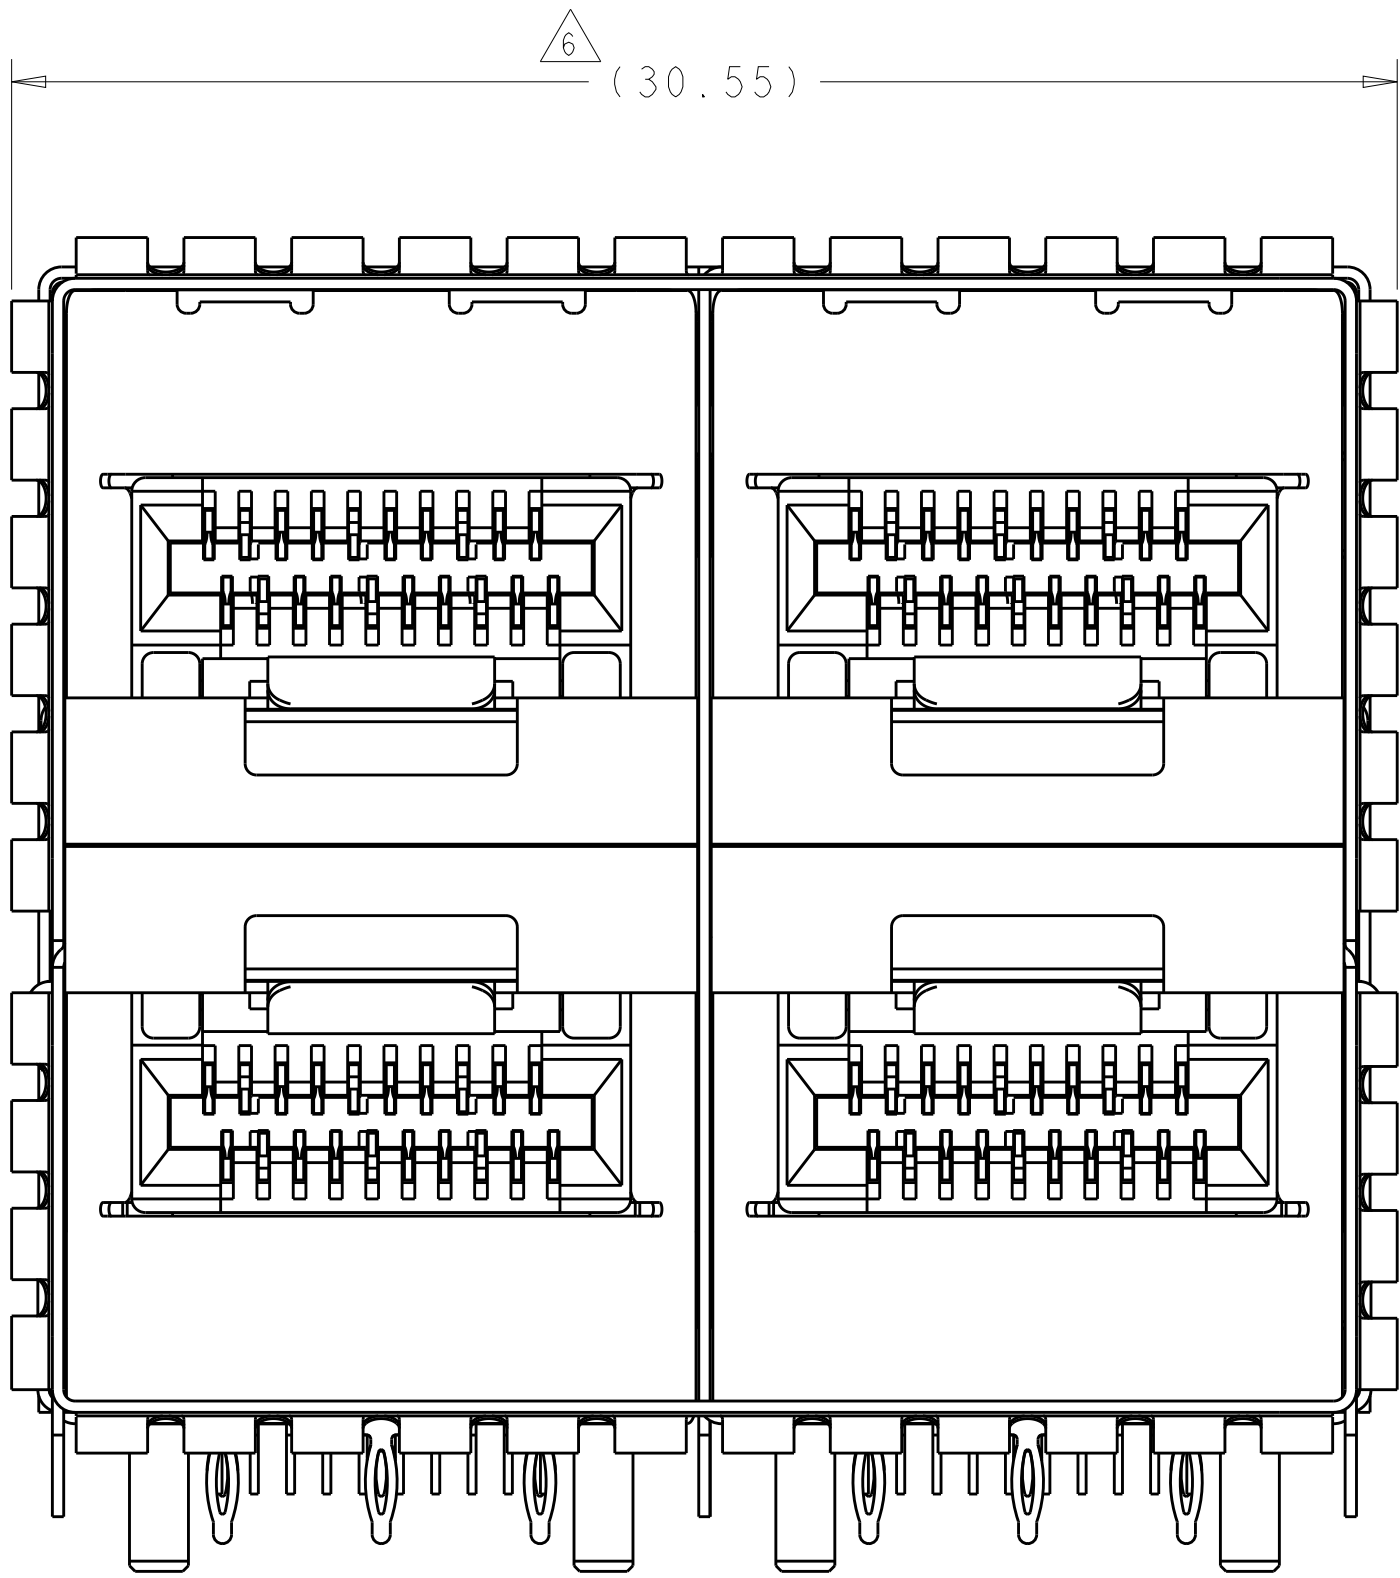


2198325-5 THRU 2198325-8, 1-2198325-9, 2-2198325-0
EMI SPRINGS ONLY
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER 06OCT2011	TE Connectivity	
DIMENSIONS:		CHK M.D. MORRISON 06OCT2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON 07OCT2011	NAME RECEPTACLE ASSEMBLY, 2X2, STACKED, zSFP+	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±	PRODUCT SPEC 108-2481 APPLICATION SPEC 114-13319 WEIGHT -		
MATERIAL SEE NOTES	SEE NOTES	SIZE A100779	CAGE CODE C=2198325	RESTRICTED TO -
Customer Drawing			SCALE 2:1	SHEET 3 OF 5
			REV B	

LOC		DIST		REVISONS			
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

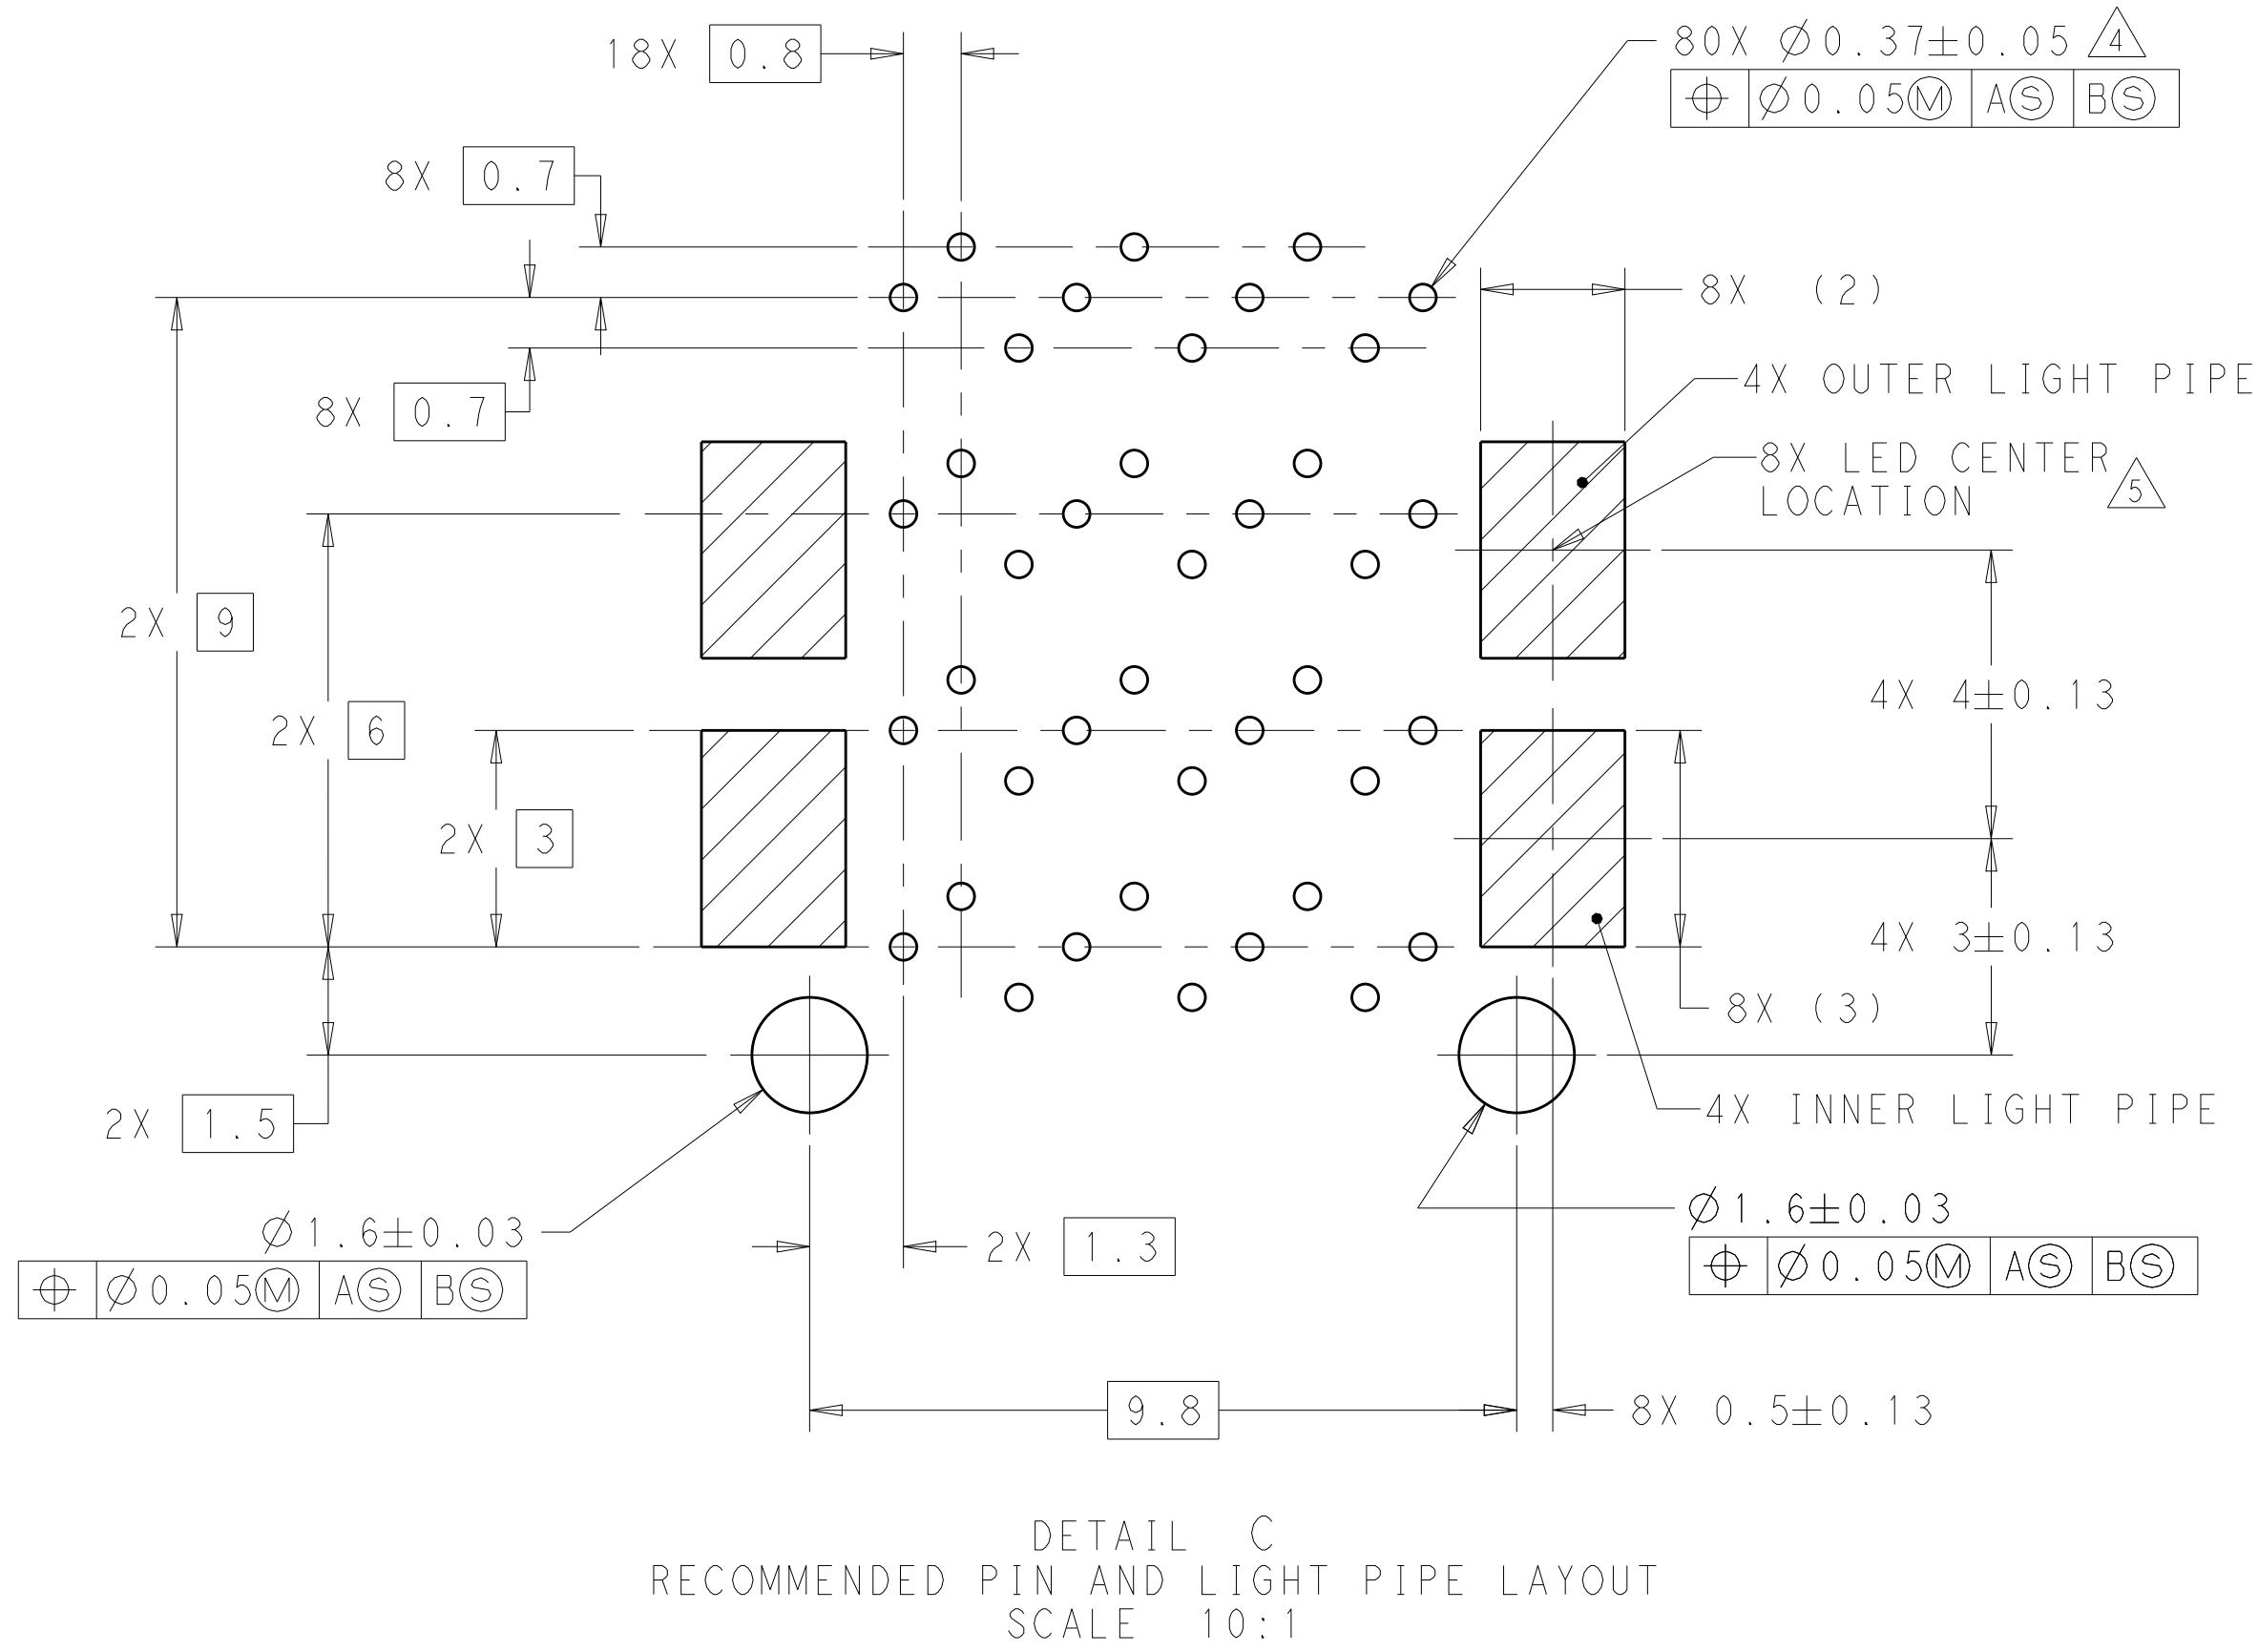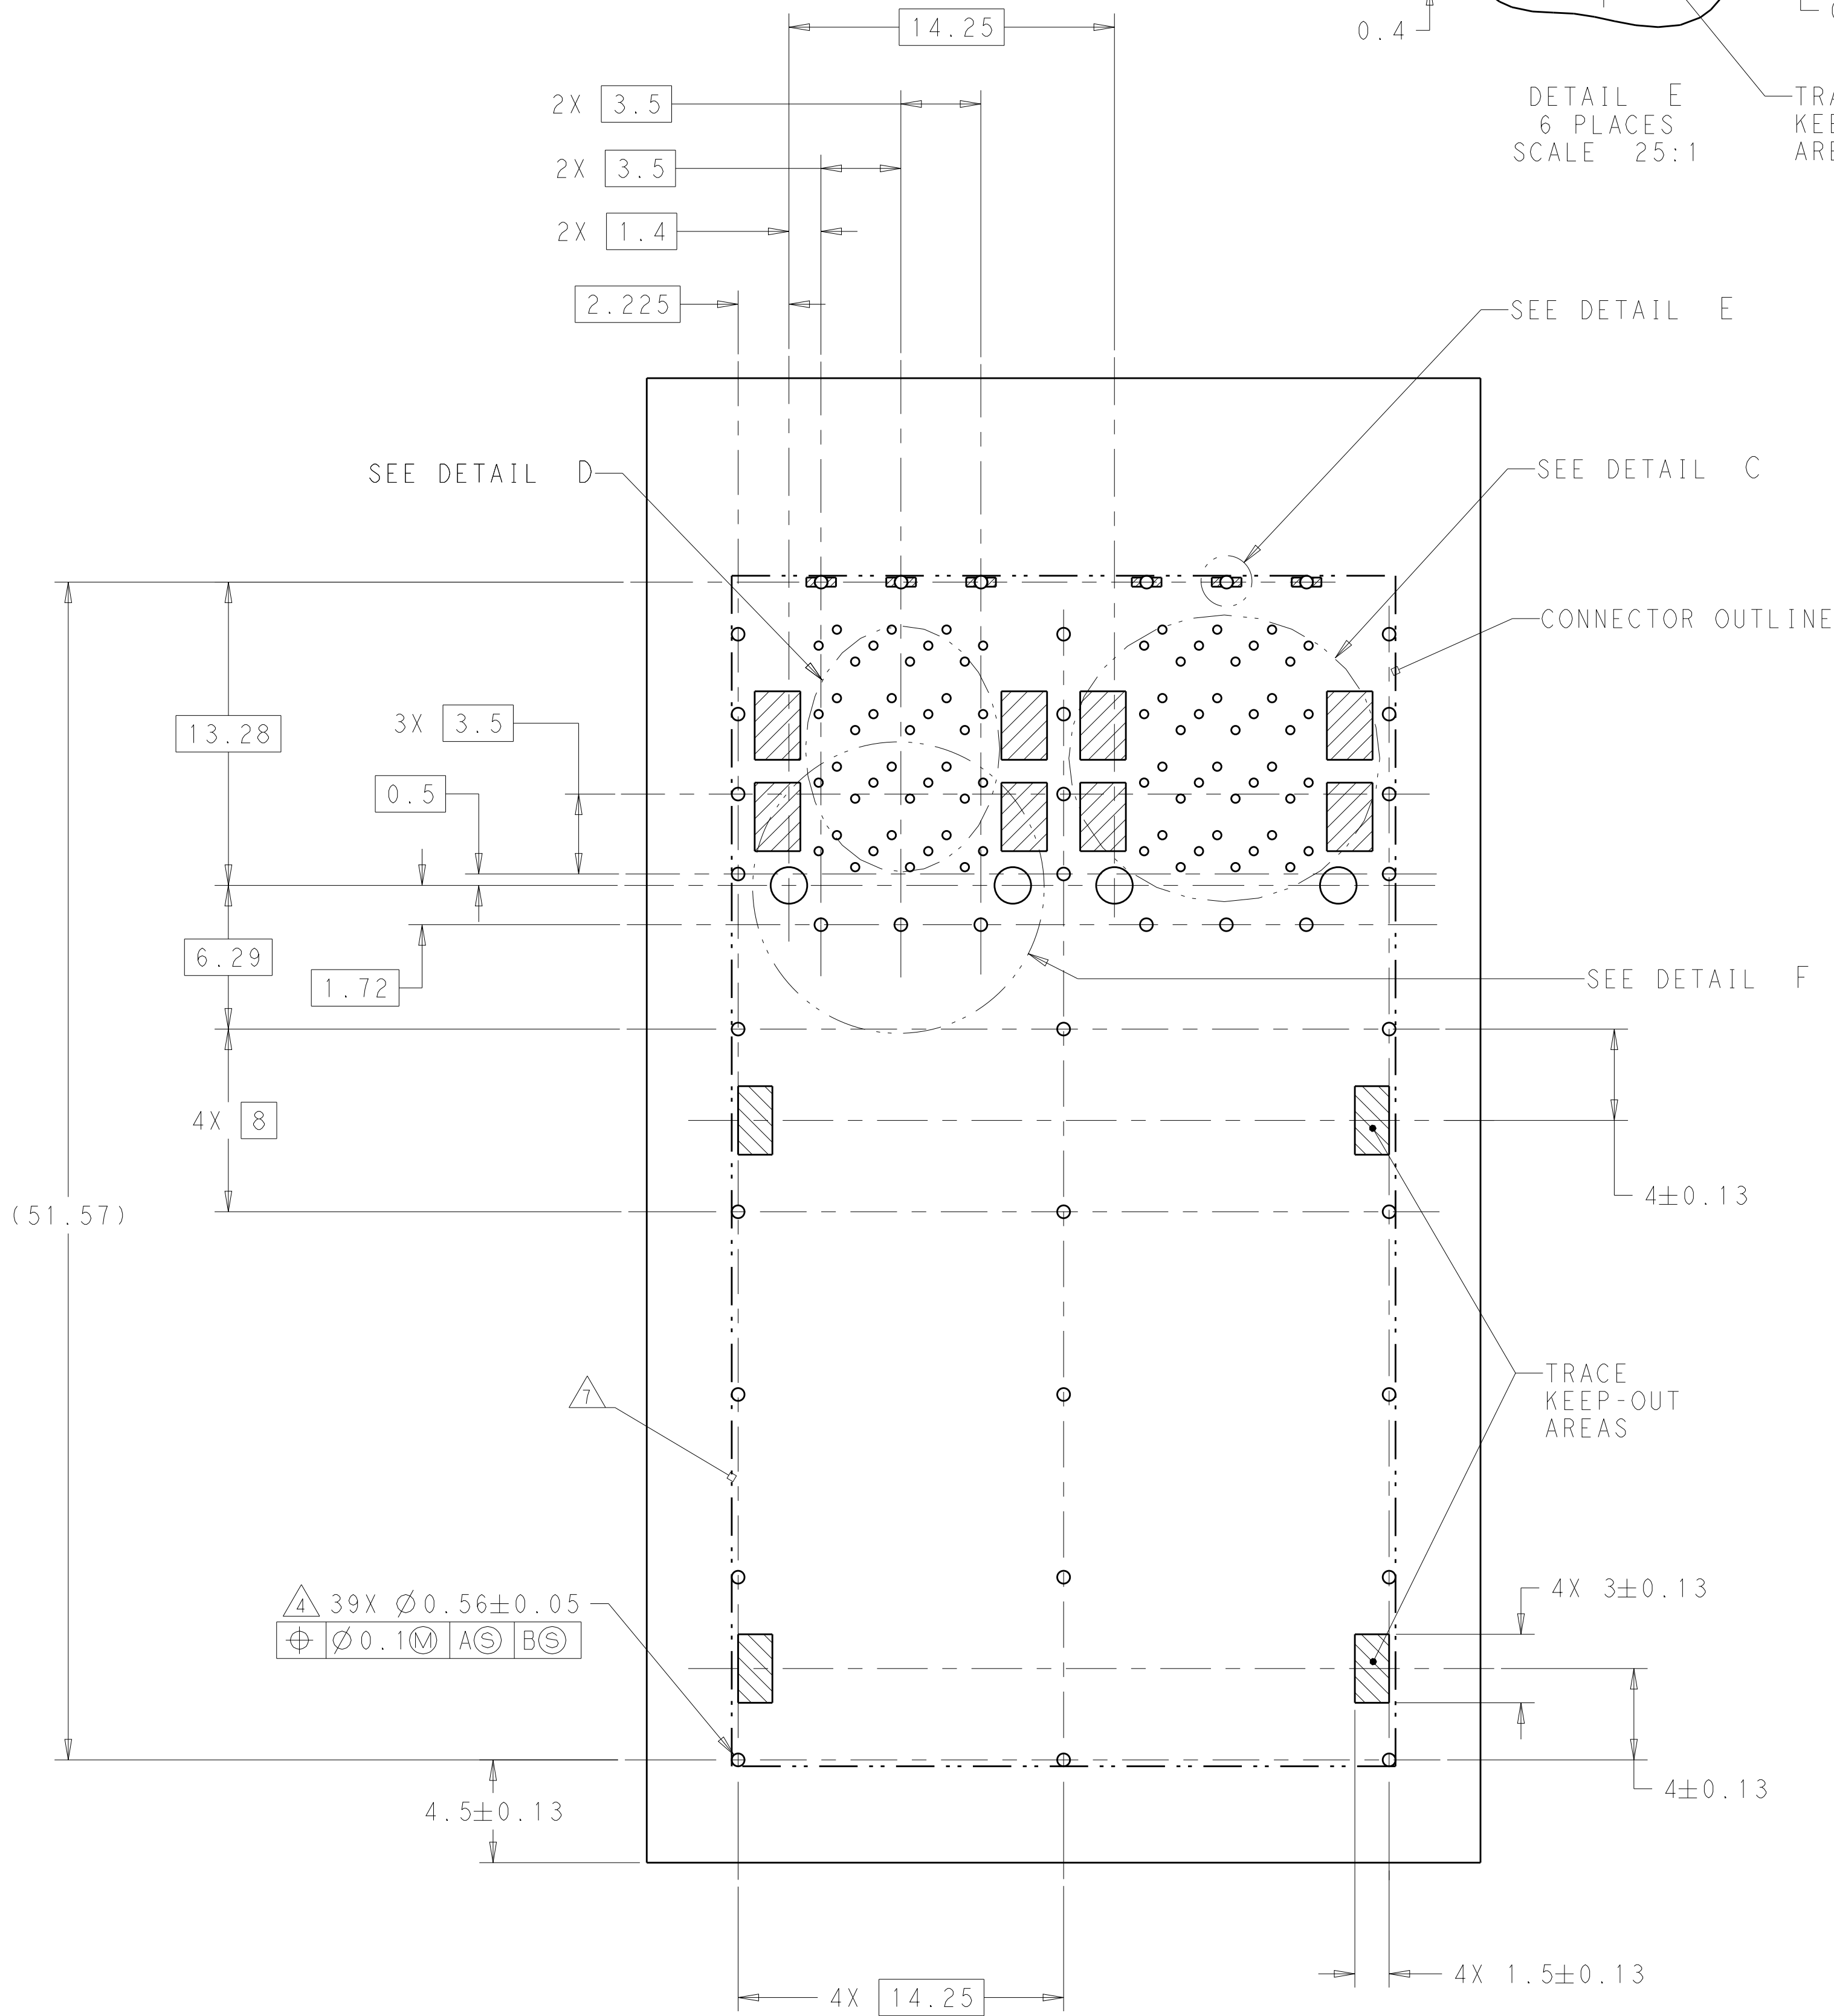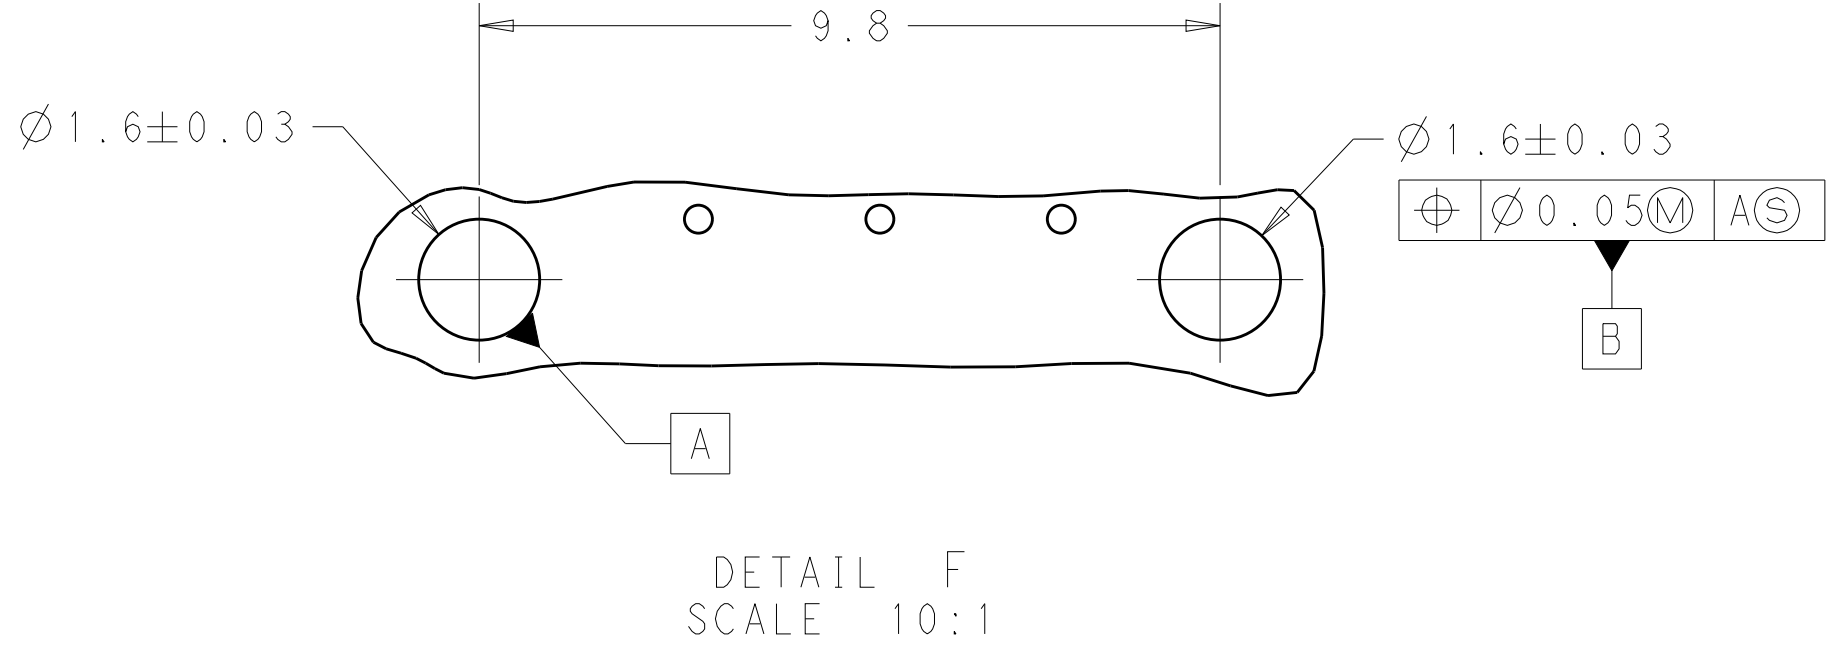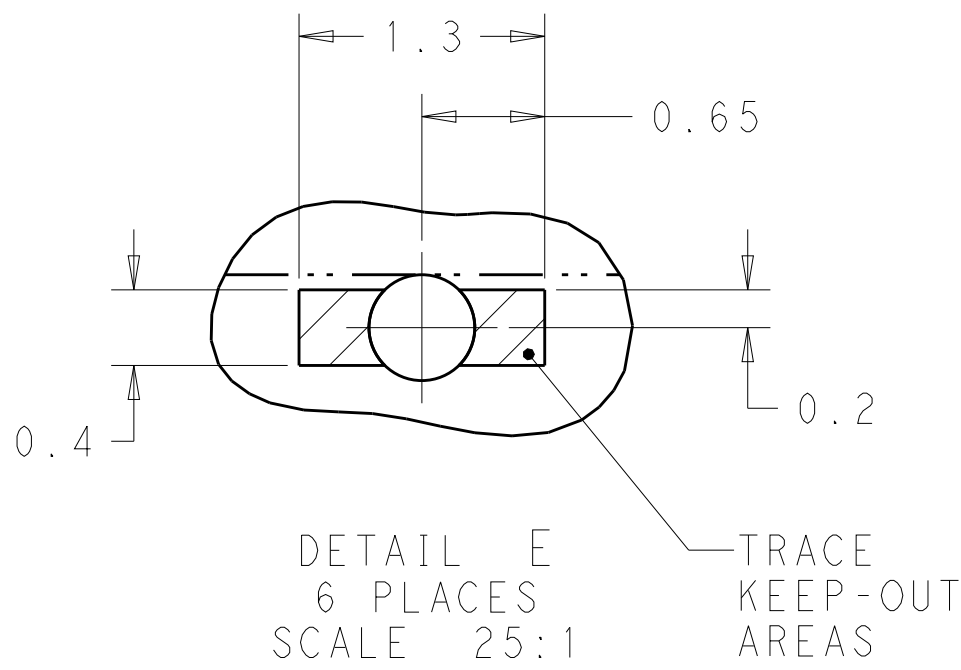

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	M.E. CONNER	06OCT2011	 TE Connectivity	
DIMENSIONS:		CHK	M.D. MORRISON	06OCT2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	M.D. MORRISON	07OCT2011	NAME RECEPTACLE ASSEMBLY, 2X2, STACKED, zSFP+	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±	PRODUCT SPEC	108-2481	APPLICATION SPEC		
MATERIAL SEE NOTES	SEE NOTES	WEIGHT	114-13319	Customer Drawing	SIZE A1	CAGE CODE 00779
		DRAWING NO.	2198325	RESTRICTED TO	SCALE 2:1	
		SHEET	4	OF	5	REV B

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

T19○ T16○ T13○
T20○ T17○ T14○ T11○
T18○ T15○ T12○


T2○ T5○ T8○
T1○ T4○ T7○ T10○
T3○ T6○ T9○

L9○ L6○ L3○
L10○ L7○ L4○ L1○
L8○ L5○ L2○


L12○ L15○ L18○
L11○ L14○ L17○ L20○
L13○ L16○ L19○

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET


DETAIL D
PIN MAP
2 PLACES
SCALE 15:1

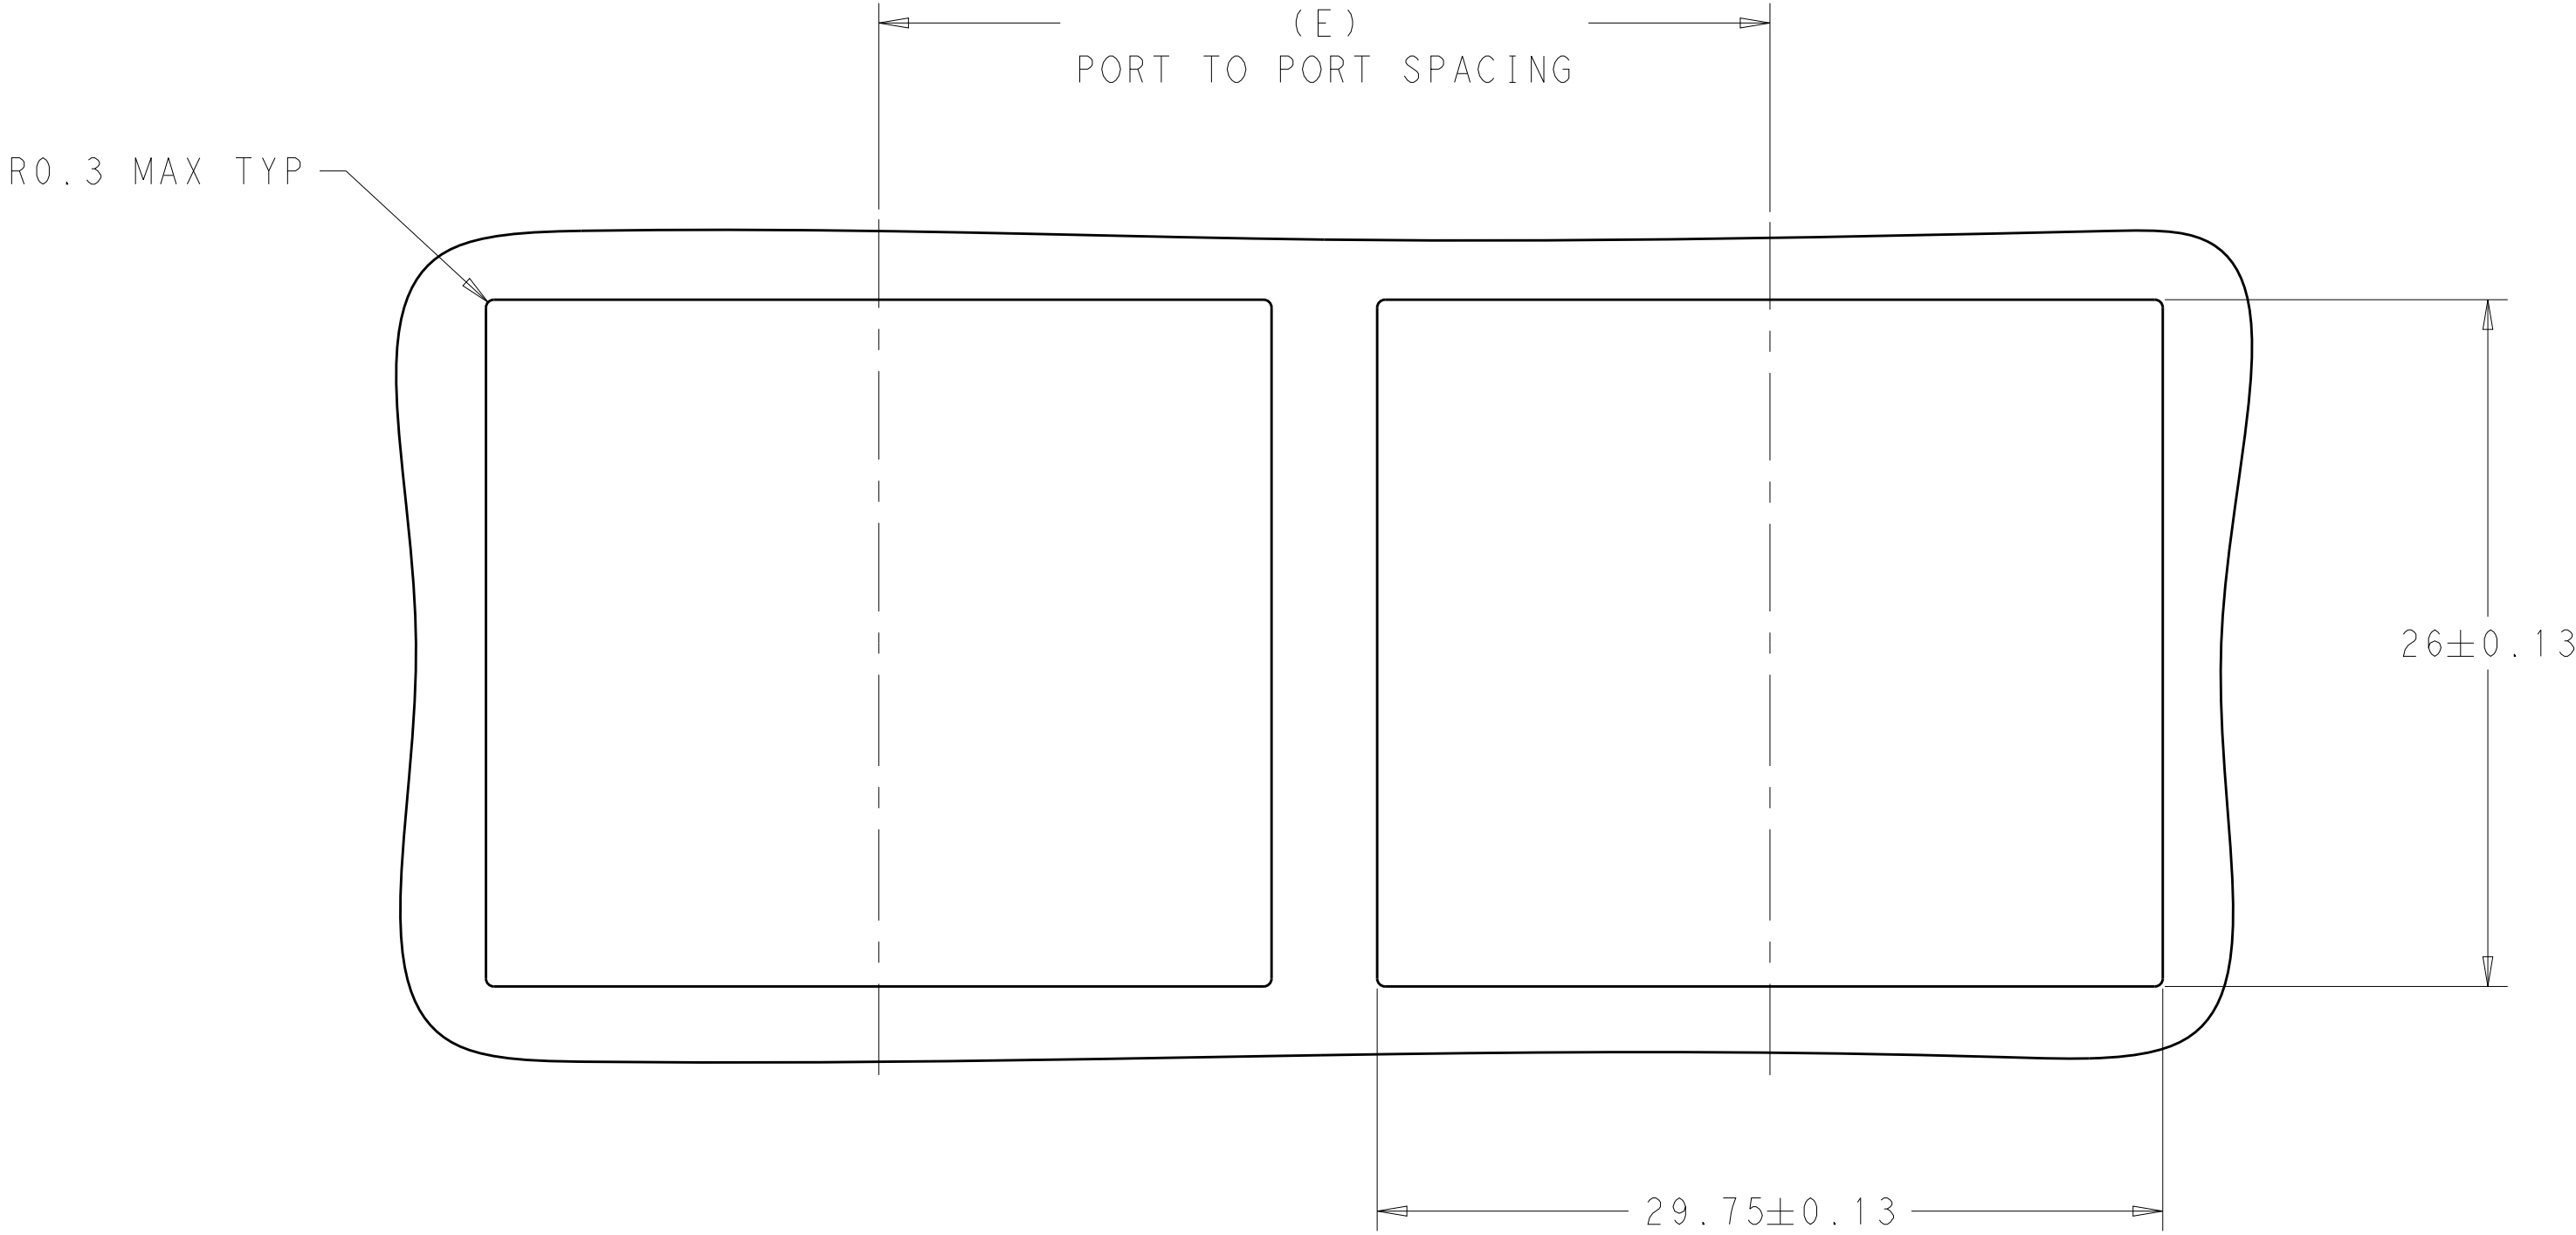

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 4:1

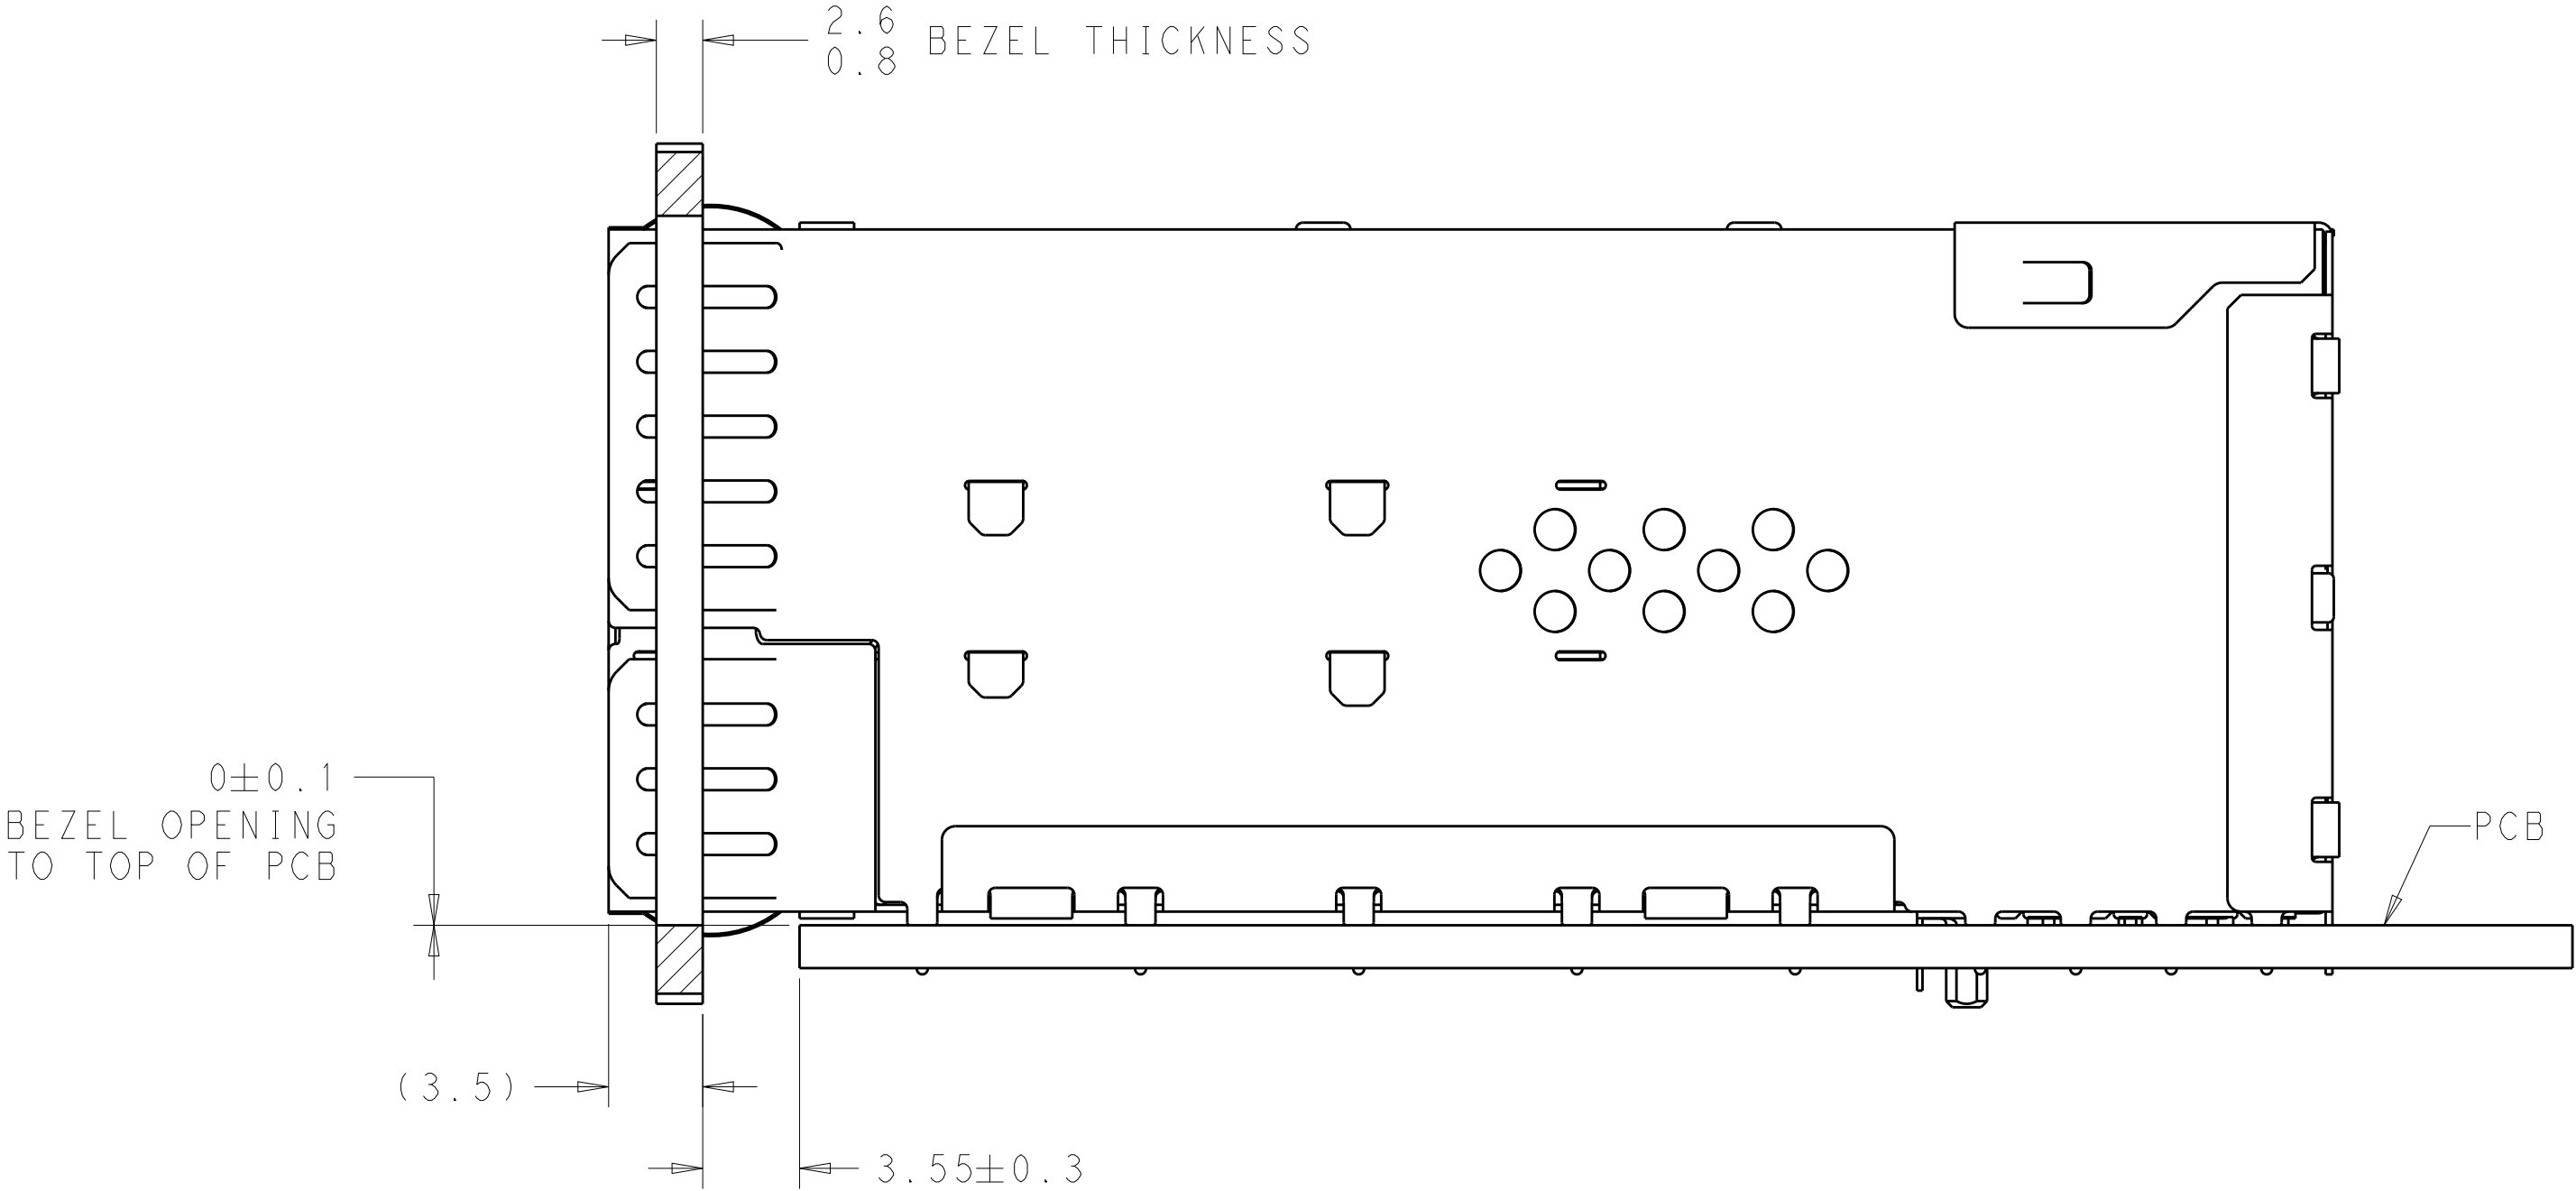

RECOMMENDED BEZEL LOCATION WITH EMI SPRINGS
SCALE 4:1

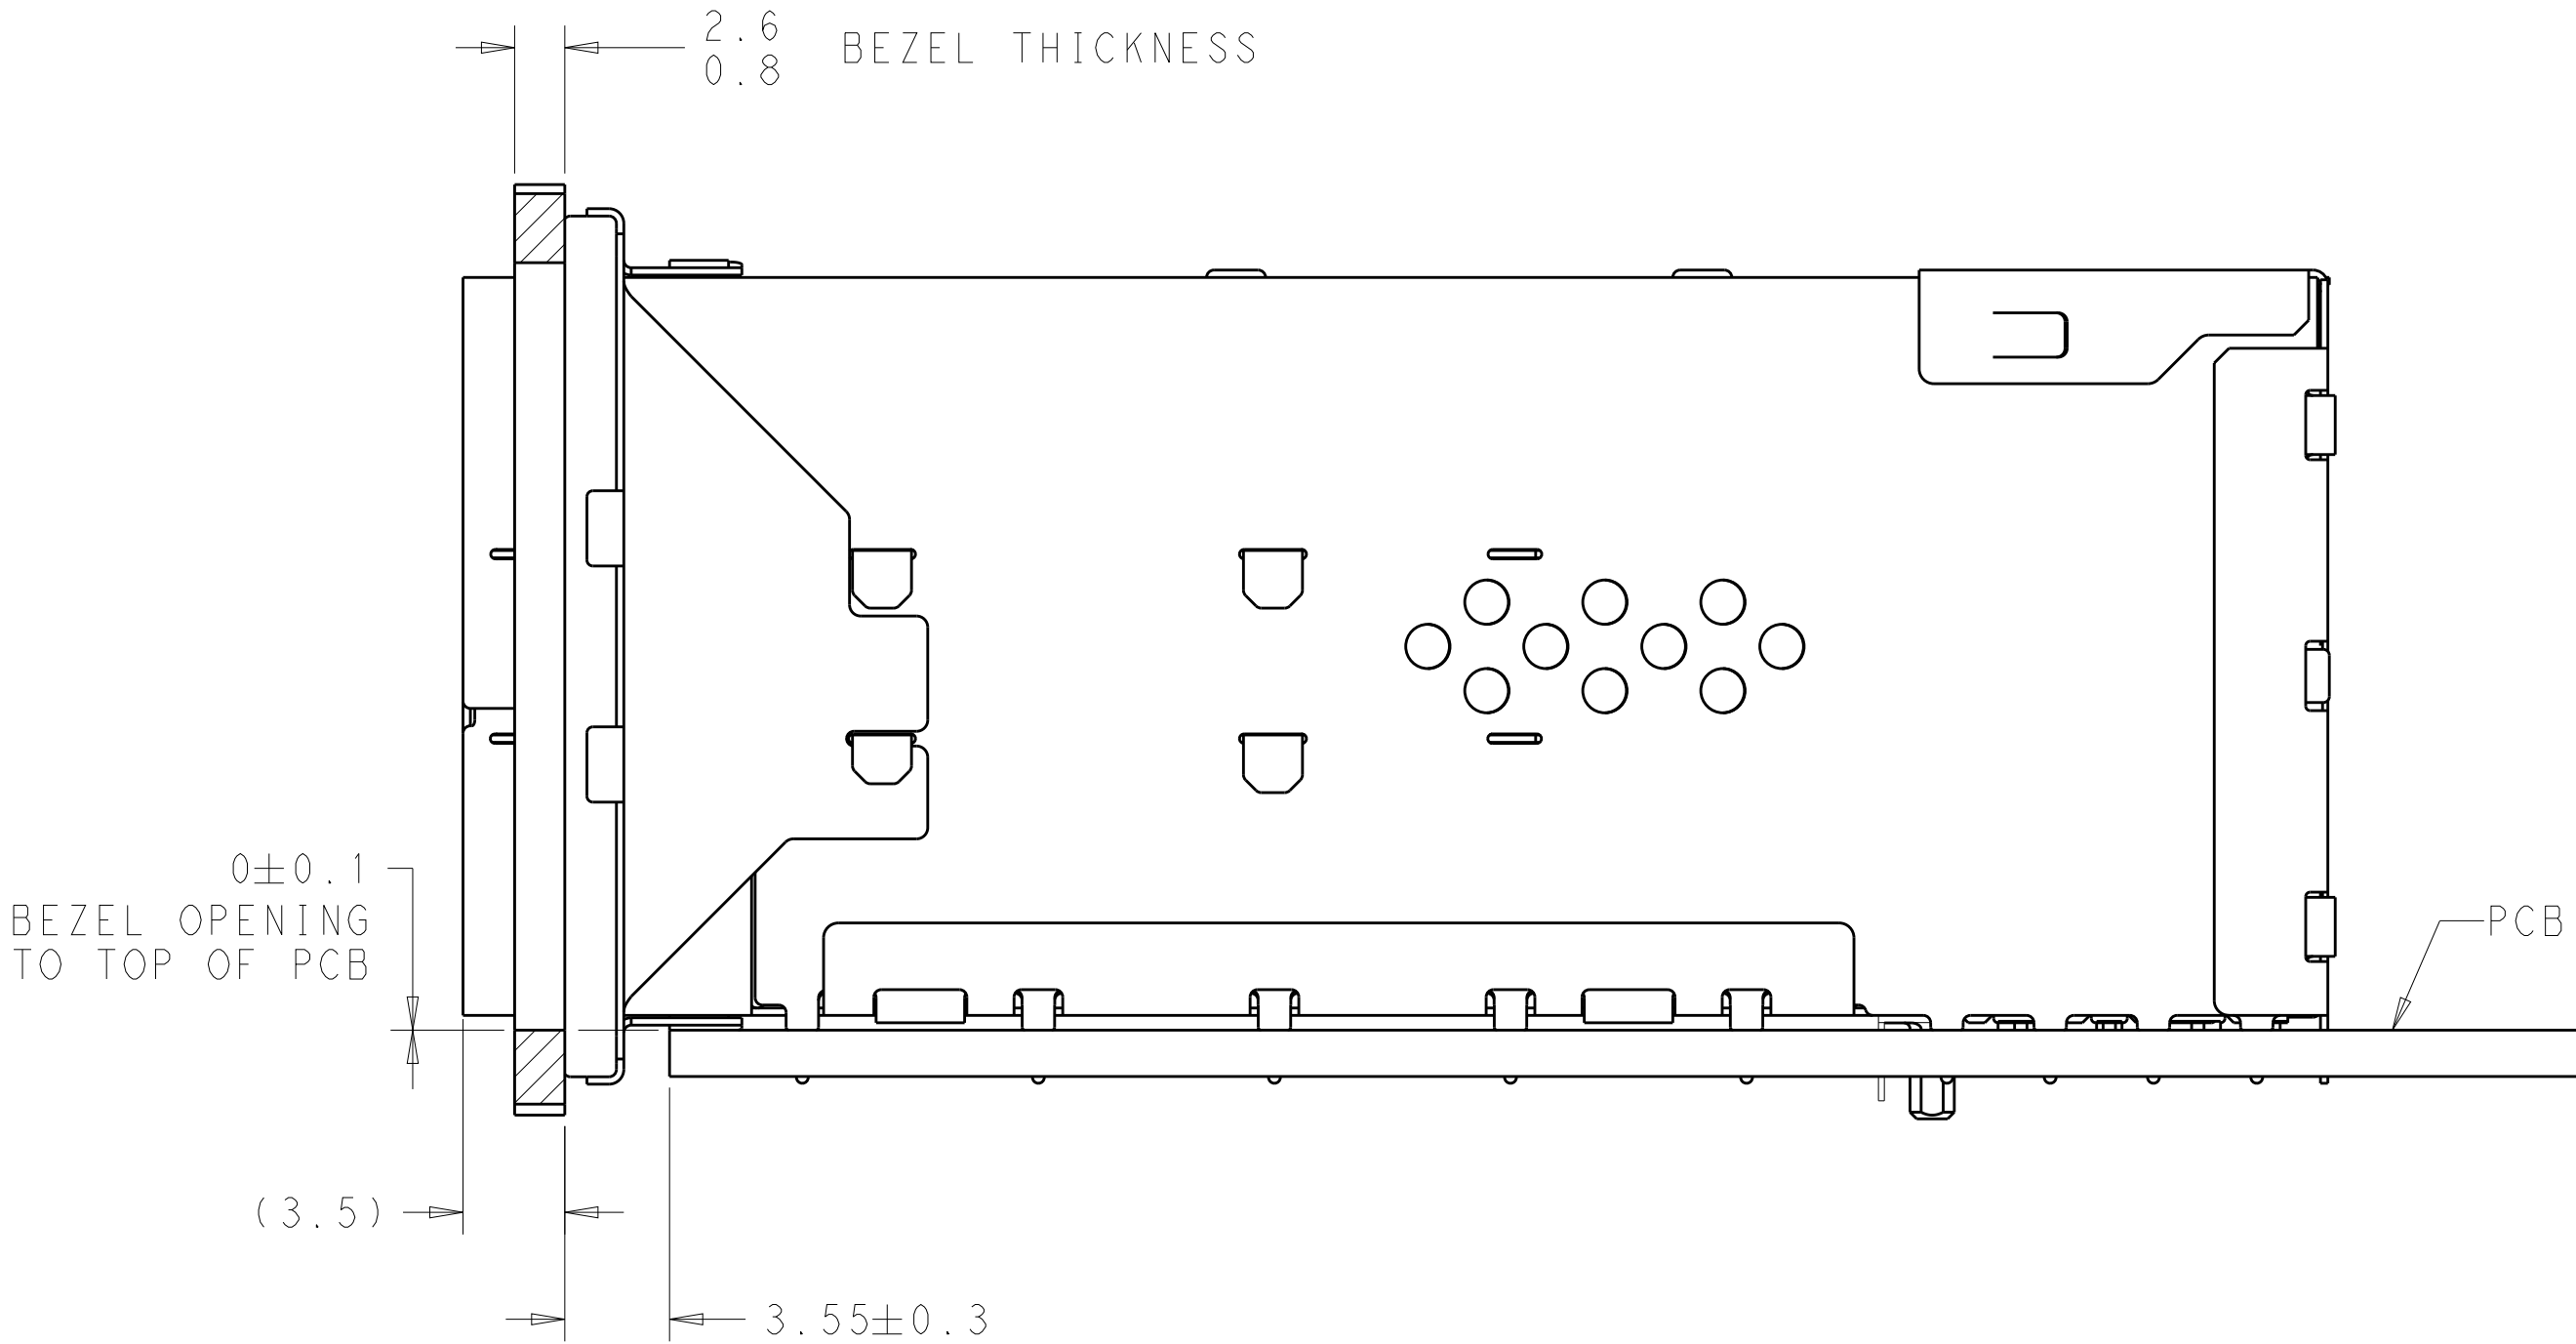

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER CHK M.D. MORRISON APVD M.D. MORRISON	06OCT2011 06OCT2011 07OCT2011	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		PRODUCT SPEC 108-2481 APPLICATION SPEC 114-13319 WEIGHT -	
MATERIAL SEE NOTES		SEE NOTES		SIZE A100779	
		Customer Drawing		CAGE CODE 2198325	
				RESTRICTED TO -	
				SCALE 2:1	
				SHEET 5 OF 5	
				REV B	