

UPA

Miniature Sized, Low Impedance,
High Reliability For
Switching Power Supplies



Smaller



Low Impedance



Long Life




Anti-Solvent
Feature

- Lower impedance than UPW.
- Smaller case size and high ripple current.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

UPA

Low
Impedance


UPW

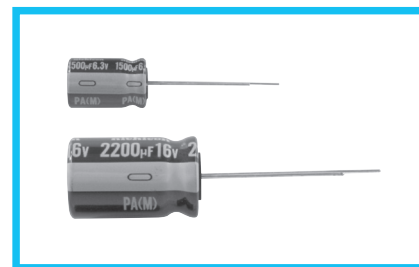

Specifications

Item	Performance Characteristics												
Category Temperature Range	-55 to +105℃												
Rated Voltage Range	6.3 to 35V												
Rated Capacitance Range	180 to 10000μF												
Capacitance Tolerance	±20% at 120Hz, 20℃												
Leakage Current	After 1 minute's application of rated voltage at 20℃, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.												
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35	120Hz 20℃						
	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12							
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.												
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	120Hz						
	Impedance ratio (MAX.)	Z-55℃ / Z+20℃	3	3	3	3		3					
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20℃ after D.C. bias plus rated ripple current is applied for 5000 hours (3000 hours for φD=8, 4000 hours for φD=10) at 105℃, the peak voltage shall not exceed the rated voltage.												
								Capacitance change	Within ± 20% of the initial capacitance value (6.3V, 10V : ± 30%)				
								tan δ	200% or less than the initial specified value (6.3V, 10V : 300%)				
	Leakage current	Less than or equal to the initial specified value											
Shelf Life	After storing the capacitors under no load at 105℃ for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20℃, they shall meet the specified values for the endurance characteristics listed above.												
Marking	Printed with white color letter on dark brown sleeve.												

Radial Lead Type

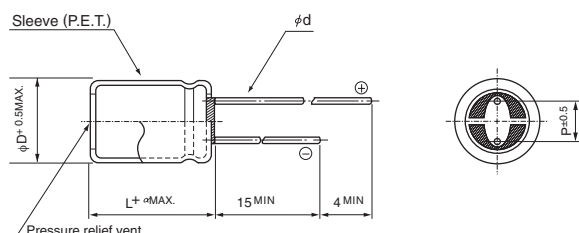


α	(L < 20)	1.5
	(L ≥ 20)	2.0

	(mm)				
φD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	*0.6	0.8	0.8

※ : In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm.

Type numbering system (Example : 10V 470µF)

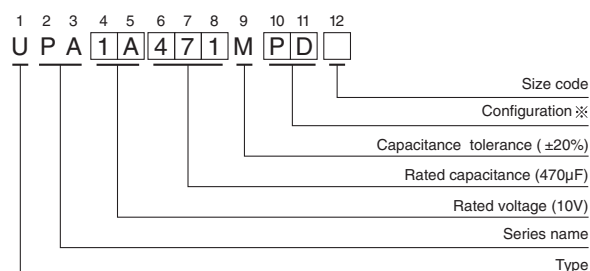

※ Configuration

φD	Pb-free leadwire Pb-free PET sleeve
8 · 10	PD
12.5 to 18	HD

Frequency coefficient of rated ripple current

Cap. (µF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
180 to 330		0.55	0.65	0.75	0.85	1.00
390 to 1000		0.70	0.75	0.80	0.90	1.00
1200 to 10000		0.80	0.85	0.90	0.95	1.00

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.

UPA

■ Dimensions

Cap.(μF)		V (Code)		6.3 (0J)			10 (1A)			16 (1C)							
				Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz		
					20°C / 100kHz	−10°C / 100kHz			20°C / 100kHz	−10°C / 100kHz			20°C / 100kHz	−10°C / 100kHz			
Code																	
330	331												8 × 11.5	0.090	0.180	630	
390	391												8 × 11.5	0.090	0.180	630	
470	471						8 × 11.5	0.090	0.180	630			10 × 12.5	0.063	0.126	900	
560	561	8 × 11.5	0.090	0.180	630	8 × 11.5	0.090	0.180	630								
680	681	8 × 11.5	0.090	0.180	630								8 × 15	0.062	0.124	860	
													▲10 × 12.5	0.063	0.126	900	
820	821					8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220	8 × 20	0.044	0.088	1220
						▲10 × 12.5	0.063	0.126	900	▲10 × 16	0.049	0.098	1240	▲10 × 16	0.049	0.098	1240
						8 × 20	0.044	0.088	1220	8 × 20	0.044	0.088	1220	10 × 16	0.049	0.098	1240
1000	102	8 × 15	0.062	0.124	860	▲10 × 12.5	0.063	0.126	900	▲10 × 16	0.049	0.098	1240	●10 × 20	0.035	0.070	1490
		▲10 × 12.5	0.063	0.126	900	●10 × 16	0.049	0.098	1240	●10 × 16	0.049	0.098	1240	●10 × 20	0.035	0.070	1490
1200	122	10 × 12.5	0.063	0.126	900	8 × 20	0.044	0.088	1220	8 × 20	0.044	0.088	1220	10 × 20	0.035	0.070	1490
		●10 × 16	0.049	0.098	1240	▲10 × 16	0.049	0.098	1240	▲10 × 16	0.049	0.098	1240	10 × 20	0.035	0.070	1490
		8 × 20	0.044	0.088	1220												
1500	152	▲10 × 16	0.049	0.098	1240	10 × 20	0.035	0.070	1490	10 × 20	0.035	0.070	1490	10 × 25	0.033	0.066	1680
		●10 × 20	0.035	0.070	1490												
1800	182					10 × 20	0.035	0.070	1490	10 × 20	0.035	0.070	1490				
						▲10 × 25	0.033	0.066	1680	▲10 × 25	0.033	0.066	1680				
2200	222	10 × 20	0.035	0.070	1490	10 × 25	0.033	0.066	1680	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890
		●10 × 25	0.033	0.066	1680	●12.5 × 20	0.029	0.058	1890	●12.5 × 20	0.029	0.058	1890	●12.5 × 25	0.022	0.044	2280
2700	272	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280
3300	332	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280	12.5 × 25	0.022	0.044	2280	12.5 × 31.5	0.018	0.036	2720
													▲16 × 20	0.026	0.052	2330	
3900	392	12.5 × 25	0.022	0.044	2280	12.5 × 25	0.022	0.044	2280	12.5 × 25	0.022	0.044	2280	12.5 × 35.5	0.016	0.032	2940
4700	472	12.5 × 25	0.022	0.044	2280	12.5 × 31.5	0.018	0.036	2720	12.5 × 31.5	0.018	0.036	2720	16 × 25	0.019	0.038	2760
						▲16 × 20	0.026	0.052	2330	▲16 × 20	0.026	0.052	2330	▲18 × 20	0.025	0.050	2640
5600	562	12.5 × 31.5	0.018	0.036	2720	12.5 × 35.5	0.016	0.032	2940	12.5 × 35.5	0.016	0.032	2940	16 × 31.5	0.017	0.035	2810
		▲16 × 20	0.026	0.052	2330								▲18 × 25	0.018	0.036	2850	
6800	682	12.5 × 35.5	0.016	0.032	2940	16 × 25	0.019	0.038	2760	16 × 25	0.019	0.038	2760	18 × 25	0.018	0.036	2850
8200	822	16 × 25	0.019	0.038	2760	16 × 31.5	0.017	0.034	2810	16 × 31.5	0.017	0.034	2810				
		▲18 × 20	0.025	0.050	2640	▲18 × 25	0.018	0.036	2850	▲18 × 25	0.018	0.036	2850				
10000	103	16 × 31.5	0.017	0.034	2810												
		▲18 × 25	0.018	0.036	2850												

Cap.(μF) Code		V (Code)		25 (1E)			35 (1V)			
		Item	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz
				20°C / 100kHz	−10°C / 100kHz			20°C / 100kHz	−10°C / 100kHz	
180	181						8 × 11.5	0.090	0.180	630
270	271		8 × 11.5	0.090	0.180	630	8 × 15 ▲10 × 12.5	0.062 0.063	0.124 0.126	860 900
330	331		8 × 11.5	0.090	0.180	630				
390	391		8 × 15	0.062	0.124	860	8 × 20 ▲10 × 16	0.044 0.049	0.088 0.098	1220 1240
470	471		8 × 15 ▲10 × 12.5	0.062 0.063	0.124 0.126	860 900				
560	561		8 × 20 ▲10 × 16	0.044 0.049	0.088 0.098	1220 1240	10 × 20	0.035	0.070	1490
680	681		10 × 16	0.049	0.098	1240	10 × 25	0.033	0.066	1680
820	821		10 × 20	0.035	0.070	1490	12.5 × 20	0.029	0.058	1890
1000	102		10 × 25 ●12.5 × 20	0.033 0.029	0.066 0.058	1680 1890	12.5 × 20	0.029	0.058	1890
1200	122		12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280
1500	152						12.5 × 31.5 ▲16 × 20	0.018 0.026	0.036 0.052	2720 2330
1800	182		12.5 × 25	0.022	0.044	2280	12.5 × 35.5 ▲16 × 20	0.016 0.026	0.032 0.052	2940 2330
2200	222		12.5 × 31.5 ▲16 × 20	0.018 0.026	0.036 0.052	2720 2330	16 × 25 ▲18 × 20	0.019 0.025	0.038 0.050	2760 2640
2700	272		12.5 × 35.5	0.016	0.032	2940	16 × 31.5 ▲18 × 25	0.017 0.018	0.035 0.036	2810 2850
3300	332		16 × 25 ▲18 × 20	0.019 0.025	0.038 0.050	2760 2640	18 × 31.5	0.016	0.032	2910
4700	472		18 × 25	0.018	0.036	2850				

▲ : In this case, [6] will be put at 12th digit of type numbering system.

● : In this case, [3] will be put at 12th digit of type numbering system.